




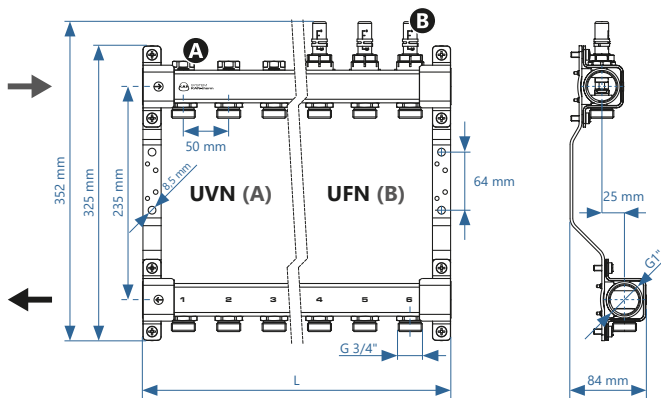

No	2	3	4	5	6	7	8	9	10	11	12
UVN	1316160022	1316160023	1316160024	1316160025	1316160026	1316160027	1316160028	1316160029	1316160030	1316160031	1316160032
m [g]	1300	1650	2000	2350	2700	3000	3400	3750	4100	4500	4800
UFN	1316157055	1316157056	1316157057	1316157058	1316157059	1316157060	1316157061	1316157062	1316157063	1316157064	1316157065
m [g]	1200	1550	1900	2200	2500	2800	3100	3450	3800	4000	4400
L [mm]	140	190	240	290	340	390	440	490	540	590	640




5&6 mm hex
Kvs = 2,4
T_{max} = 90 °C
P_{max} = 10 bar
H₂O = 100% / glycol = max 50%




0-2,5 l/min
Kvs = 1,1
T_{max} = 70 °C
P_{max} = 6 bar
H₂O = 100% / glycol = max 50%


InoxFlow: UVN / UFN

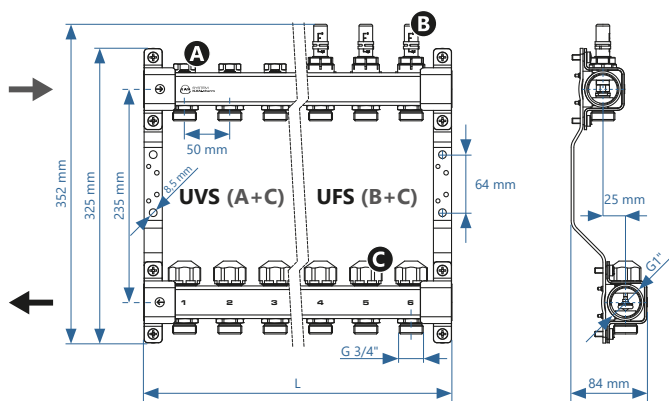


No	2	3	4	5	6	7	8	9	10	11	12
UVS	1316160033	1316160034	1316160035	1316160036	1316160037	1316160038	1316160039	1316160040	1316160041	1316160042	1316160043
m [g]	1450	1900	2300	2750	3200	3600	4000	4500	4900	5400	5800
UFS	1316157066	1316157067	1316157068	1316157069	1316157070	1316157071	1316157072	1316157073	1316157074	1316157075	1316157076
m [g]	1372	1769	2166	2563	2960	3357	3754	4151	4548	4944	5341
L [mm]	140	190	240	290	340	390	440	490	540	590	640




5&6 mm hex
 $Kvs = 2,4$
 $T_{max} = 90\text{ }^{\circ}\text{C}$
 $P_{max} = 10\text{ bar}$
 $H_2O = 100\% / \text{glycol} = \text{max } 50\%$




0-2,5 l/min
 $Kvs = 1,1$
 $T_{max} = 70\text{ }^{\circ}\text{C}$
 $P_{max} = 6\text{ bar}$
 $H_2O = 100\% / \text{glycol} = \text{max } 50\%$




M30x1,5
 $Kvs = 2,4$
 $F_{min} = 50\text{ N}$
 $\Delta h = 4\text{ mm}$

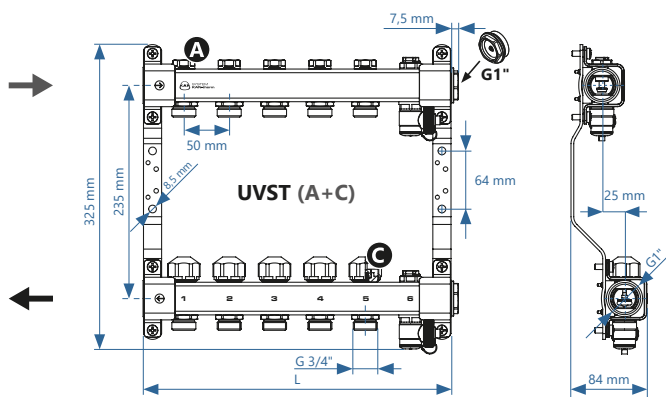


No	2	3	4	5	6	7	8	9	10	11	12
UVST	1316157128	1316157129	1316157130	1316157131	1316157132	1316157133	1316157134	1316157135	1316157136	1316157137	1316157138
m [g]	1946	2376	2807	3237	3668	4098	4529	4959	5389	5820	6250
L [mm]	190	240	290	340	390	440	490	540	590	640	690






5&6 mm hex
 KvS = 2,4
 $T_{max} = 90\text{ }^{\circ}\text{C}$
 $P_{max} = 10\text{ bar}$
 $H_2O = 100\%$ / glycol = max 50%



M30x1,5
 Kvs = 2,4
 $F_{min} = 50\text{ N}$
 $\Delta h = 4\text{ mm}$

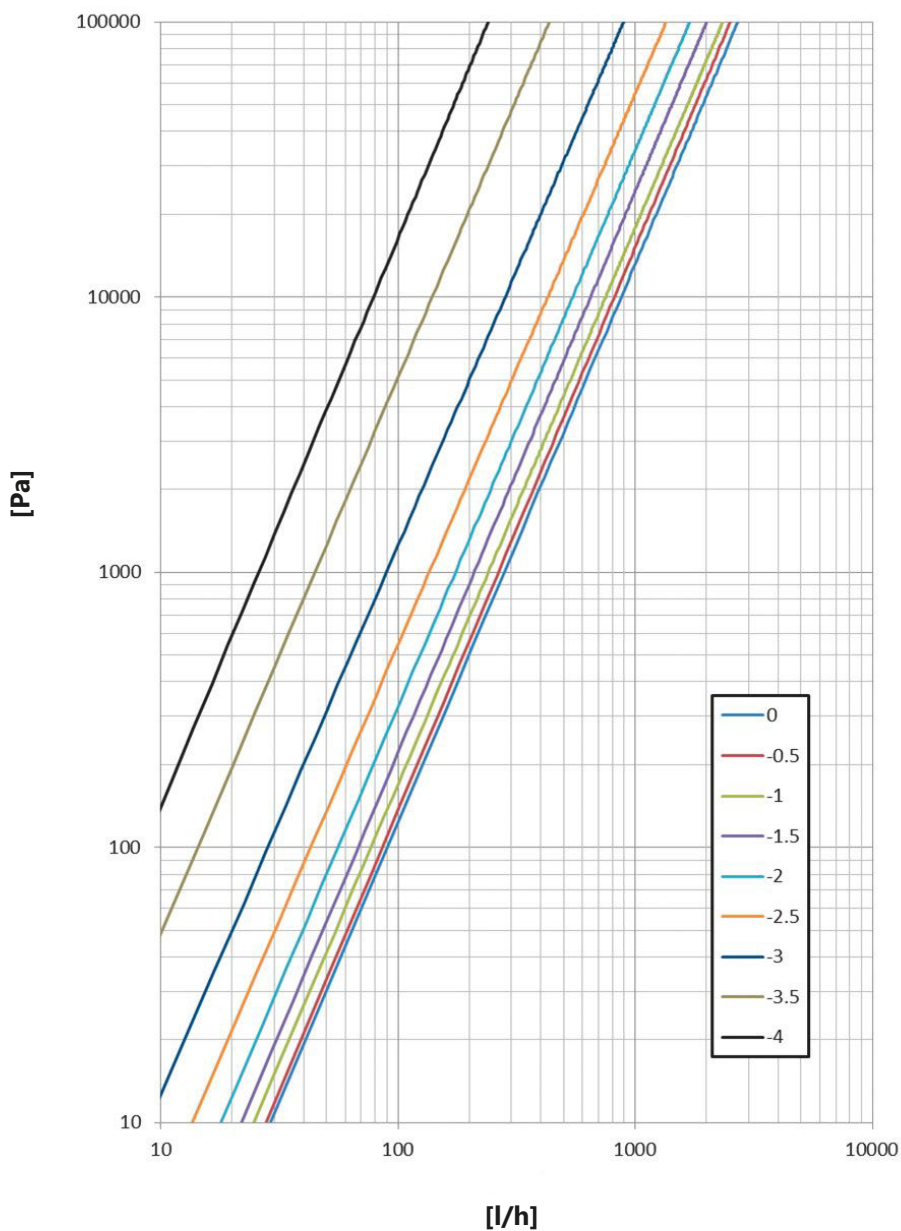

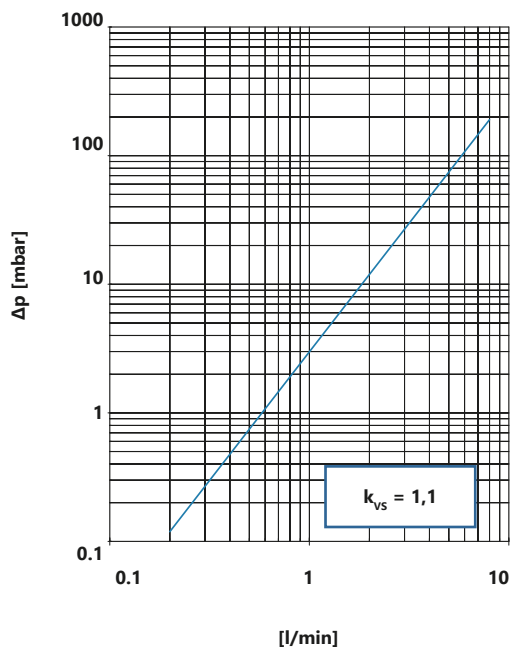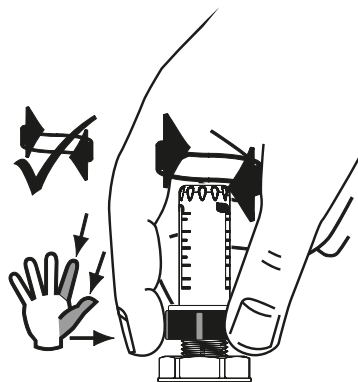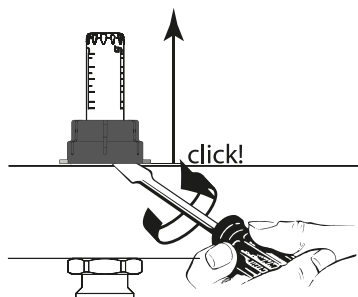

**KAN Sp. z o.o.
ul. Zdrojowa 51
16-001 Kleosin**

© KAN 2025

www.kan-therm.com