

WOODLANDER® TRAILER HM126, HM130, HM130MAX®

*Track Not Included



OPERATOR'S MANUAL

0010262-M-EN: Rev B
Publication Date: 04-Jun-2024



The Woodlander® is sold as an *off-road only* sawmill trailer compatible with HM126, HM130, HM130MAX®, & HM136MAX™ sawmills. Woodlander® is a registered trademark of Woodland Mills, Inc.

This page intentionally left blank.



TABLE OF CONTENTS

TABLE OF CONTENTS	1
INTRODUCTION	3
GENERAL SAFETY RULES	4
INSPECTION/MAINTENANCE	5
TECHNICAL SPECIFICATIONS	6
BOLT TORQUE SPECIFICATIONS	6
UNPACKING	7
COMPONENT LISTS	8
TO-SCALE HARDWARE	10
BOLTS & SCREWS	10
SCALES	12
WASHERS	13
NUTS	13
SAWMILL COMPONENTS	14
SAWMILL HARDWARE	14
TRAILER ASSEMBLY	15
1. TOOLS REQUIRED	15
2. GUSSETS	16
3. SIDE PLATES	18
4. FRONT AND REAR CROSS BEAMS	21
5. SIDE PLATE-TO-RAIL OFFSET & BOLT TORQUING	23
6. INNER CROSS BEAMS AND JACK MOUNTS	28
7. AXLE MOUNTS AND AXLE CROSS BEAM	31
8. AXLE	33
9. TONGUE AND COUPLER	35
10. LIGHTING	37
11. NAMEPLATES	41
12. HEAD LOCK-DOWN PLATES	43
13. WHEELS	46
WHEEL ALIGNMENT ADJUSTMENT	47
14. FENDERS	48
15. SAFETY CHAIN	50



OPERATION	51
LOCKING-DOWN THE SAWMILL HEAD	51
REPLACEMENT PARTS ORDERING	53
EXPLODED ASSEMBLY VIEWS	54
CHASSIS AND TRACK, SIDE PLATE ALIGNMENT	54
TONGUE	55
NORTH AMERICA	55
EUROPE	55
AXLES, WHEELS, AND FENDERS	56
LIGHTING	57
NORTH AMERICA	57
EUROPE	58
NAMEPLATES	59
SWIVEL JACKS	60
HEAD LOCK-DOWN	61
PARTS LISTS	62
NORTH AMERICA	62
EUROPE	64
NOTES	66



INTRODUCTION

Congratulations on your purchase and welcome to Woodland Mills! This manual gives you the necessary information about your Woodlander® sawmill trailer so you will be able to use it properly. The entire manual must be read and understood before using the trailer. If any questions should arise that are not covered by this manual, please contact Woodland Mills, Inc.

OWNER'S RECORD

Please take a moment to record the following information about your Woodlander® sawmill trailer. If you need to call for assistance, please be ready to provide your model and serial numbers. This information will allow us to help you more quickly when you call.

MODEL NUMBER

SERIAL NUMBER

DATE OF PURCHASE

The Woodlander® sawmill trailer is compatible with HM126, HM130, HM130MAX®, & HM136MAX™ sawmill and track systems for milling logs while the trailer is stationary and firmly supported on the ground. It is not intended to carry any additional weight or be used as a utility trailer.

The Woodlander® sawmill trailer is sold as *off-road only* trailers designed for certain applications. We strongly recommend the trailer not be modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use the trailer until you have first contacted Woodland Mills to determine if it can or should be performed using the product.

For technical questions and replacement parts, please contact Woodland Mills, Inc.

GENERAL SAFETY RULES



WARNING!

Read and understand all instructions. Failure to follow all instructions listed below may result serious injury.



WARNING!

The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions or situations that could occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product but must be supplied by the operator.



WARNING!

Do not climb on or within the Woodlander® trailer as it is not safe. Use a certified step ladder or similar if reaching from the ground is not possible. Failure to heed this warning could result in serious injury.



WARNING!

The trailer is not designed to carry any additional weight other than the sawmill and trailer itself while being towed. Failure to heed this warning could result in damage to the trailer and/or the sawmill.

Damage caused by towing additional weight will void the warranty.



WARNING!

The Woodlander® sawmill trailers are designed and sold as off-road trailer packages and are recommended for this type of use. While they include some road safety components, every province, state, and country have unique regulations that need to be met for road-worthiness. It is important to comply with all regional regulations if attempting to convert the trailer for road use.



INSPECTION/MAINTENANCE

- Check the tires before all trips. Make sure they are inflated to the pressure shown on the tire.
- Grease the axle bearings every 3 months or 1000 miles [1600 km], whichever comes first.
- Check the tow hitch ball coupler. Make sure it is not damaged.
- Check the wheel lug nuts before all trips. Make sure they are torqued properly.
- Check the lights. Make sure all the lights work properly. Replace any lights that do not work.
- Inspect trailer before all trips for any damaged or loose parts.

TECHNICAL SPECIFICATIONS

Item	Specification
Trailer Axle	Independent Torsion Axle Design
Trailer Wheels	5 Bolts @ 4.5 in [114 mm] & 5.30-12 Approved Tires
Tire Pressure	Refer to Tire
Wheel Nut Torque	80 ft•lb [110 N•m]
Trailer Ball Coupler	2 in [50 mm]
Trailer Lights	LED Light Kit (stop, turn, tail, side markers, and license plate light)
Finish	Powder Coat Paint / Galvanized Steel
Fenders	Removable
Safety	Locking pins and safety straps to secure sawhead while travelling
Shipping Weight	655 lb [297 kg]
Product Weight	571 lb [259 kg]

BOLT TORQUE SPECIFICATIONS

Bolt (Thread Size)	Torque
M5	78 in•lb [9 N•m]
M6	133 in•lb [15 N•m]
M8	333 in•lb [38 N•m]
M10	53 ft•lb [72 N•m]
M12	93 ft•lb [126 N•m]

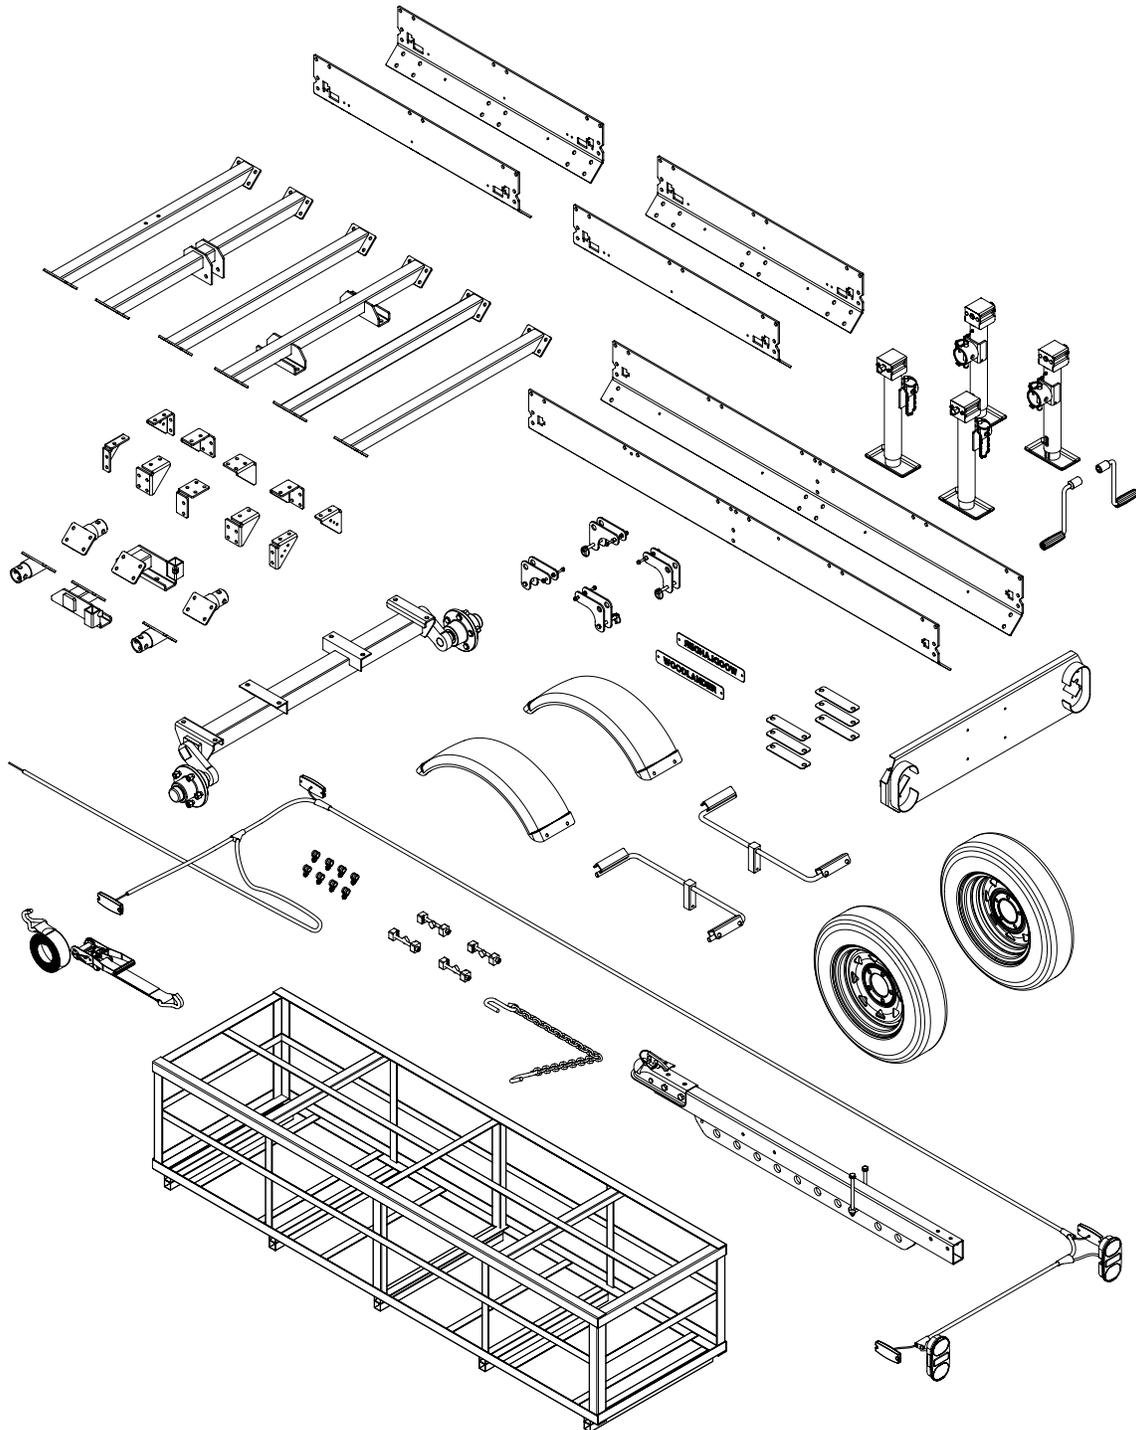


BOLT TORQUE WARNING!

The torque specifications listed above apply only to the track and trailer assembly outlined in this manual. They do *not* apply to the sawmill assembly. Follow the instructions in the sawmill operator's manual when assembling the carriage and sawhead.





















UNPACKING














Remove all the parts from the steel crate. Set the crate aside as it will be used as a support for several of the assembly steps.



COMPONENT LISTS

Verify all component and hardware quantities are correct prior to assembling the trailer.







4x	End Gusset [0001373]		4x	Jack Mount [0001376]	
6x	Joining Gusset [0001374]		4x	Swivel Jack [0006798]	
2x	Long Side Plate [0008948]		2x	Swivel Jack Handle [0006800]	
4x	Short Side Plate [0008947]		4x	Side Plate Alignment Diamond [0008949]	
3x	Cross Beam [0002900]		4x	Side Plate Alignment Nut [0008950]	
1x	Front Cross Beam [0002899]		4x	Side Plate Alignment Jaw [0008951]	
1x	Tongue Cross Beam [0010163]		1x	Axle Assembly	
1x	Axle Cross Beam [0002898]		6x	Axle Shim Plate [0001682]	
1x	Left Axle Mount [0001680]		2x	Wheel [5.30-12]	
1x	Right Axle Mount [0001681]		1x	Tongue [0001371]	







1x	Tongue Bracket [0001372]		4x	Lock-Down Pin [0001394]	
2x	Knob M10 X 30 mm [0001698]		4x	Linch Pin [0004720]	
3x	Round Locking Pin [0004728]		2x	Nameplate [0004445]	
1x	Safety Chain [0001382]		1x	Hitch Ball Coupler (North America) [0001381]	
1x	Taillight Bracket [0002901]		1x	Ratchet Strap [0005146]	
2x	Fender Bracket [0001683]		1x	Hitch Ball Coupler (Europe) [0001702]	
2x	Fender [0001684]		1x	Wiring Harness (Europe) [0001676-2]	
8x	Cable Clamp [0001396]		2x	Reflector Bracket (Europe) [0001379]	
1x	Wiring Harness (North America) [0001676-1]		2x	Rear Reflector (Europe) [0001390]	
8x	Lock-Down Plate [0001990]		4x	Side Reflector (Europe) [0001391]	
4x	Spacer [0004142]		2x	Front Reflector (Europe) [0001392]	





TO-SCALE HARDWARE

BOLTS & SCREWS

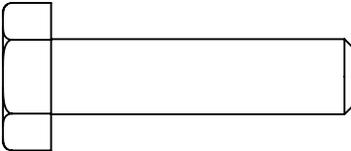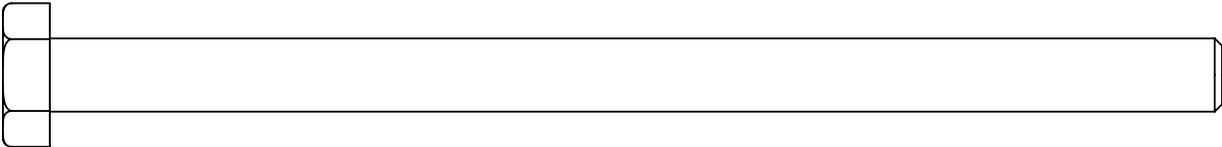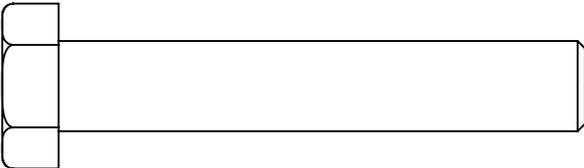Hardware graphics are printed at 1:1 scale for ease of identification. Simply place the hardware over the image in the tables to verify it is the correct size.

12x	HHB-MBE075FCJ	M6 X 1 X 20 mm HEX BOLT
		
4x	HHB-MBE085FCJ	M6 X 1 X 30 mm HEX BOLT
		
4x	HHB-MBE105FCJ	M6 X 1 X 50 mm HEX BOLT
		
1x	HHB-MBM095FCM	M10 X 1.5 X 40 mm HEX BOLT
		
2x	HHB-MBM215PCM	M10 X 1.5 X 160 mm HEX BOLT
		
2x	HHB-MBR125PCM*	M12 X 1.75 X 70 mm HEX BOLT
		

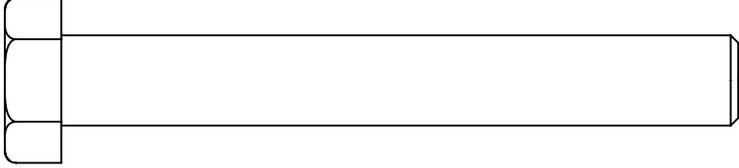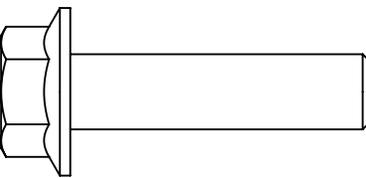2x	HHB-MBR155PCM**	M12 X 1.75 X 100 mm HEX BOLT
		
8x	FHH-MBJ075FCJ	M8 X 1 X 20 mm FLANGED HEX BOLT
		
4x	FHH-MBJ080FCJ	M8 X 1 X 25 mm FLANGED HEX BOLT
		
116x	FHH-MBM085FCM	M10 X 1.5 X 30 mm FLANGED HEX BOLT
		
32x	FHH-MBM090PCM	M10 X 1.5 X 35 mm FLANGED HEX BOLT
		
8x	FHH-MBM095PCM	M10 X 1.5 X 40 mm FLANGED HEX BOLT
		

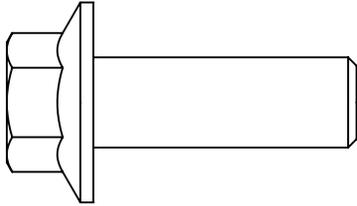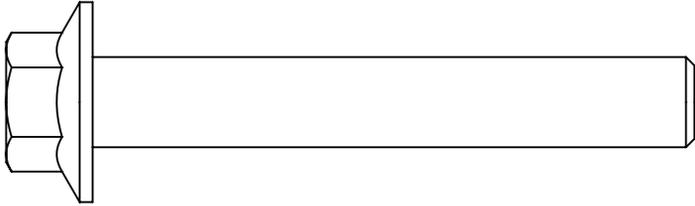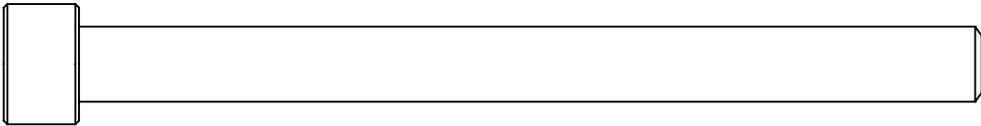8x	FHH-MBR090PCM	M12 X 1.75 X 35 mm FLANGED HEX BOLT
		
2x	FHH-MBR135PCM	M12 X 1.75 X 80 mm FLANGED HEX BOLT
		
4x	SHC-MBM175PTA	M10 X 1.5 X 120 mm SOCKET HEAD CAP SCREW
		
8x	PPH-MBA075FCE***	M5 X 0.8 X 20 mm PHILLIPS PAN HEAD SCREW
		

* M12 X 1.75 X 70 mm Hex Bolts not applicable on European trailers

** M12 X 1.75 X 100 mm Hex Bolts not applicable on North American trailers

*** M5 X 0.8 X 20 mm Phillips Pan Head Screw quantity 12x on European trailers

SCALES

Ruler scales are also provided below to double-check bolt and screw lengths when necessary.

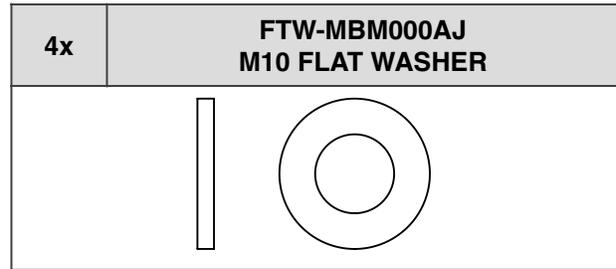
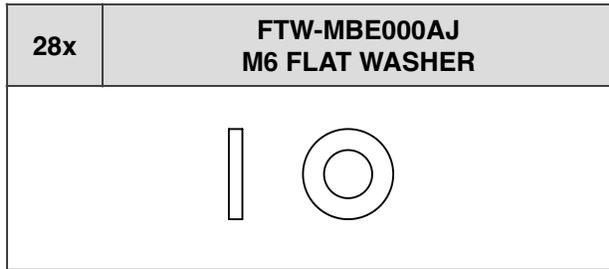


CENTIMETRES / MILLIMETRES











INCHES

WASHERS









NUTS

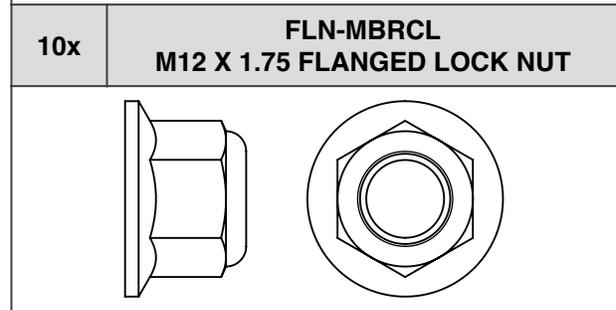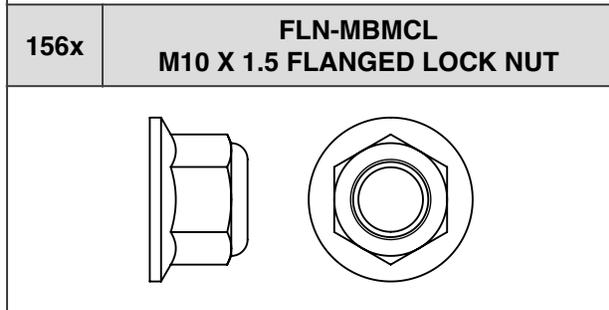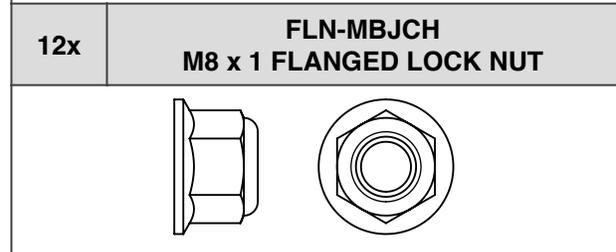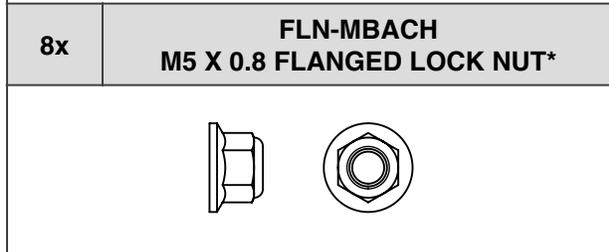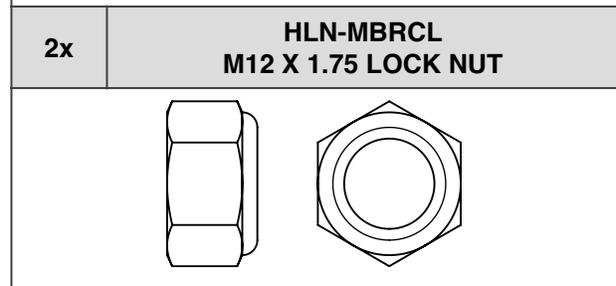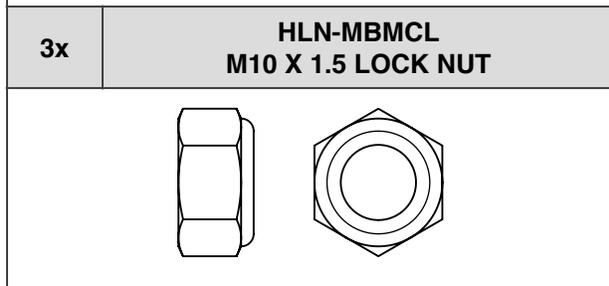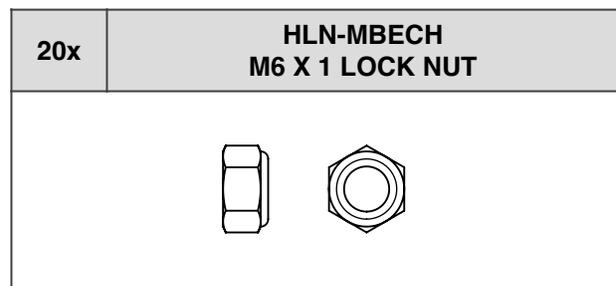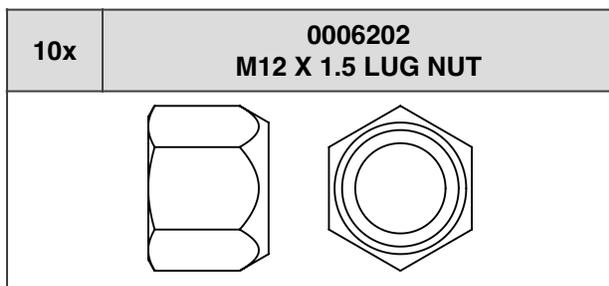

* M5 X 0.8 Flanged Lock Nut quantity 14x on European trailers

SAWMILL COMPONENTS

These components from the sawmill are required to build the trailer. They do not ship with the Woodlander® trailer.

4x	Track Rail [0001073]		1x	Centre Bunk Assembly	
2x	Reinforcement Plate [0001072]		2x	Mid Bunk Assembly	
4x	Carriage Stop [0001055]		2x	End Bunk Assembly	
3x	T-Bolt M10 X 40 mm [0001059]				

SAWMILL HARDWARE

None of the hardware from the sawmill is used to build the trailer.

TRAILER ASSEMBLY











1. TOOLS REQUIRED

Tool	Specification
Phillips Head Screwdriver	No. 3
Wrench/Socket	8 mm
Wrench/Socket	9 mm
Wrench/Socket	10 mm
Wrench/Socket	13 mm
Wrench/Socket	14 mm
Wrench/Socket	15 mm
Wrench/Socket	18 mm
Adjustable Wrench	Variable
Torque Wrench	Capable of 93 ft•lb [126 N•m]
Drill	Corded or cordless

2. GUSSETS

Using the hardware listed below, assemble the gussets to the track as shown on the next page.

Ensure the track width is set correctly (see track widths on next page), and measure diagonally to check for squareness. Torque all bolts per the table in section, **BOLT TORQUE SPECIFICATIONS**.


24x	M10 X 30 mm Flanged Hex Bolt		2x	Mid Bunk	
8x	M10 X 40 mm Flanged Hex Bolt		2x	Reinforcement Plate	
32x	M10 Flanged Lock Nut		4x	End Gusset	
2x	End Bunk		6x	Joining Gusset	
1x	Centre Bunk		4x	Track Rail	

Track components listed in these tables are *not* included with the trailer package, namely track rails, reinforcement plates, bunks, and carriage stops. These components are found in the sawmill crate. If the trailer was purchased for an existing sawmill (i.e. the sawmill is currently assembled), the track will need to be disassembled prior to building the trailer and the following assembly instructions performed.




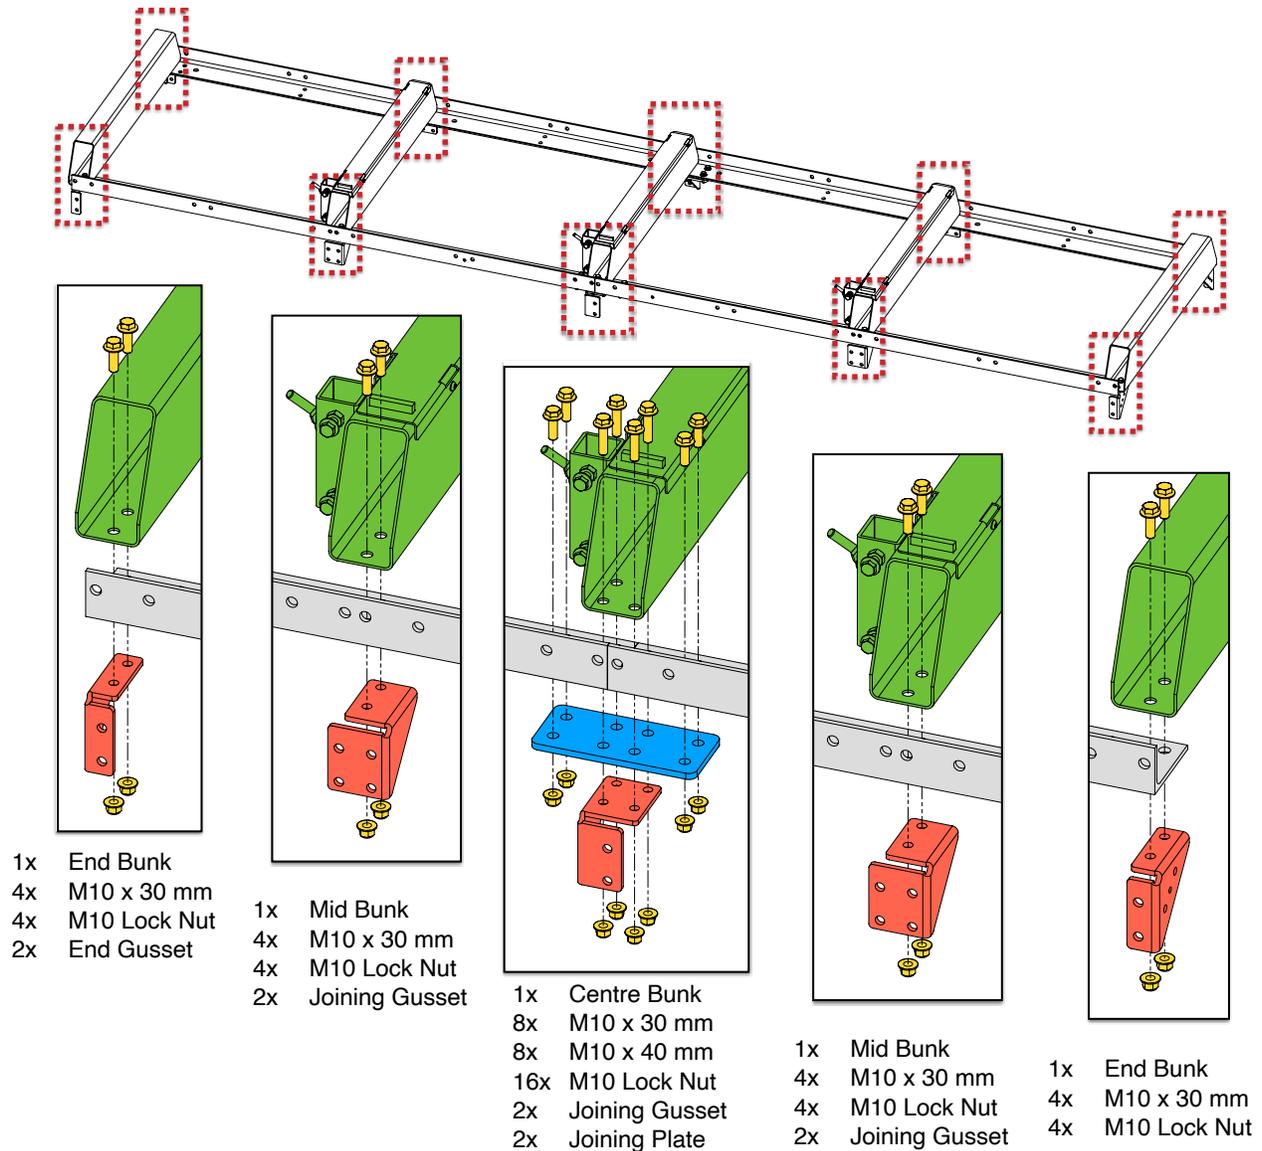Use the fasteners included with the sawmill trailer to assemble the track. The fasteners included with the sawmill track will *not* be used.






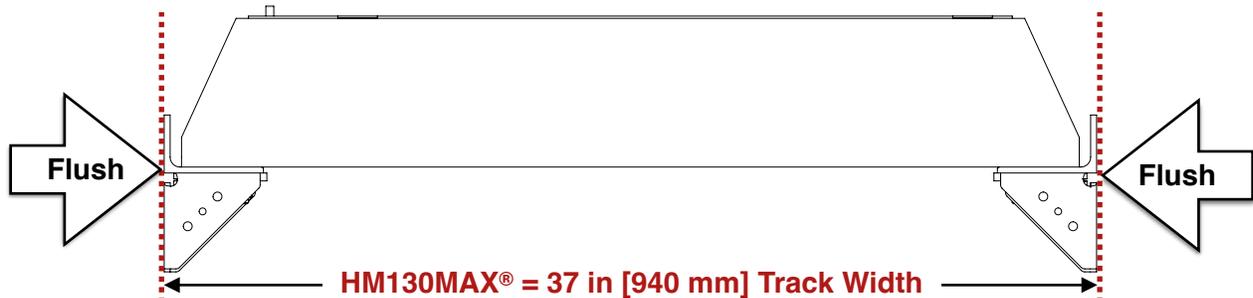The above steps need to be completed on both left and right sides of the track. Make sure the gussets are flush with the outside face of the track rails as shown below.









3. SIDE PLATES

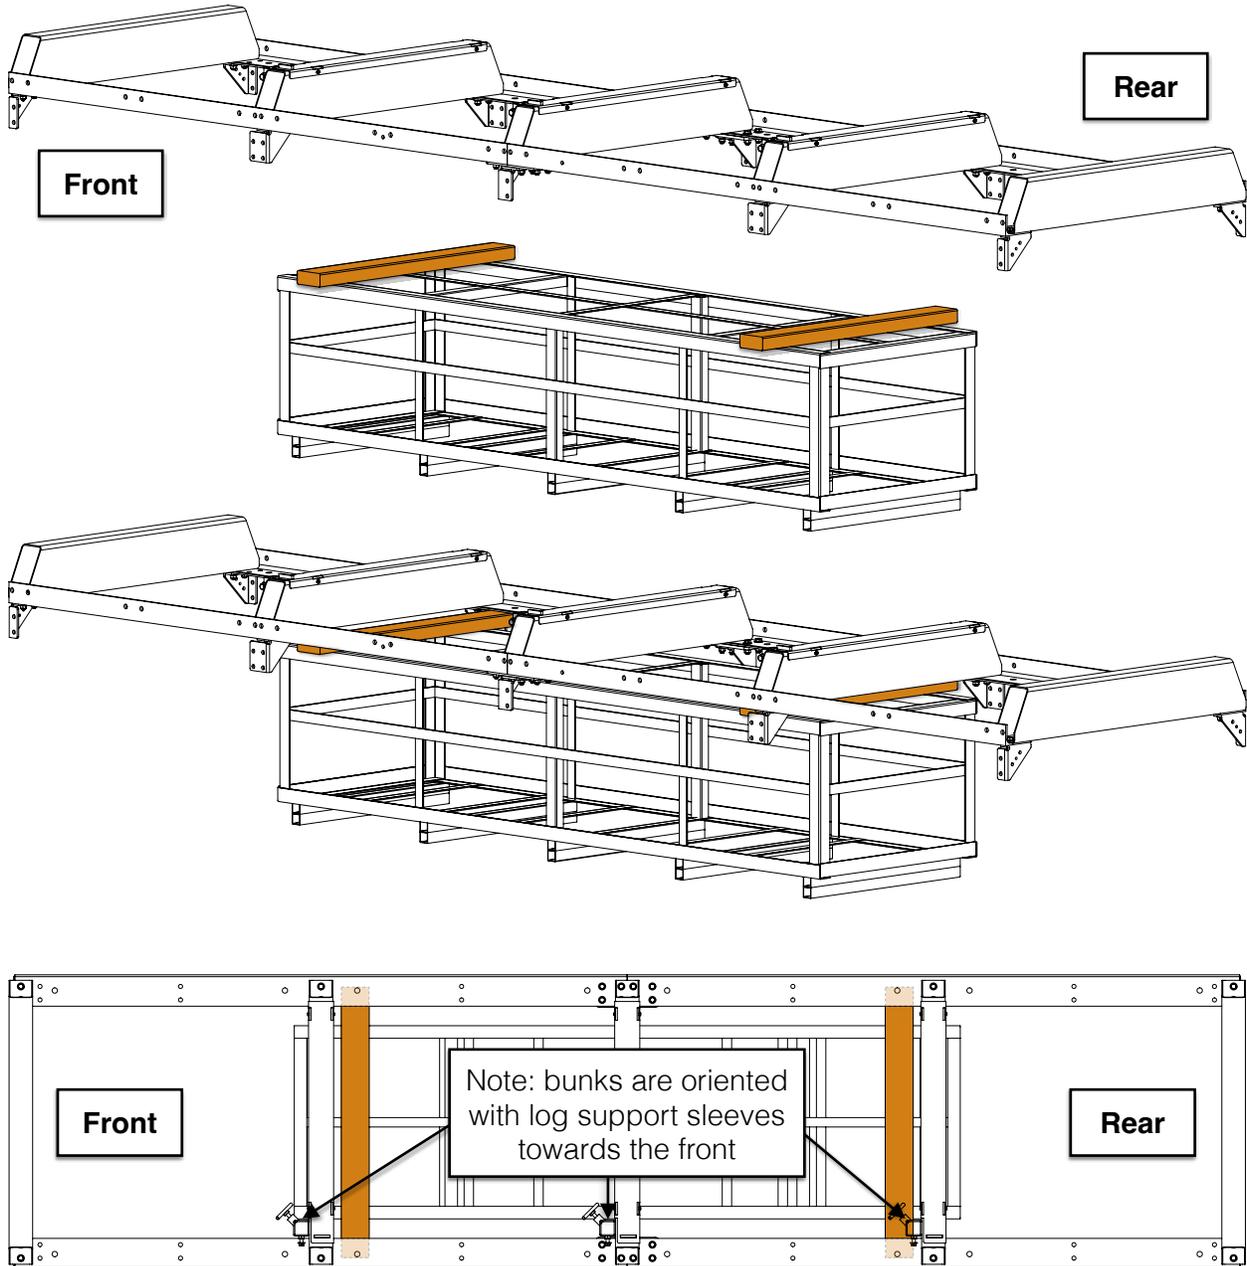
Using the shipping crate as an assembly aid, lay two (2) 2X4s across the top the crate near each end. Position the track/gusset assembly on the 2X4s, ensuring it is centred end-to-end. The 2X4s need to be long enough to support the track rails but shorter than the track is wide.






Use 36 in [914 mm] long 2X4s.

Using the hardware listed below, hang the side plates using the M10 X 30 mm and M10 X 35 mm bolts. Do not tighten these bolts. The eight (8) M10 X 35 mm bolts are used with the carriage stops. The M10 X 30 mm bolts are used everywhere else.






68x	M10 X 30 mm Flanged Hex Bolt		2x	Long Side Plate	
8x	M10 X 35 mm Flanged Hex Bolt		4x	Short Side Plate	
76x	M10 Flanged Lock Nut		4x	Carriage Stop	

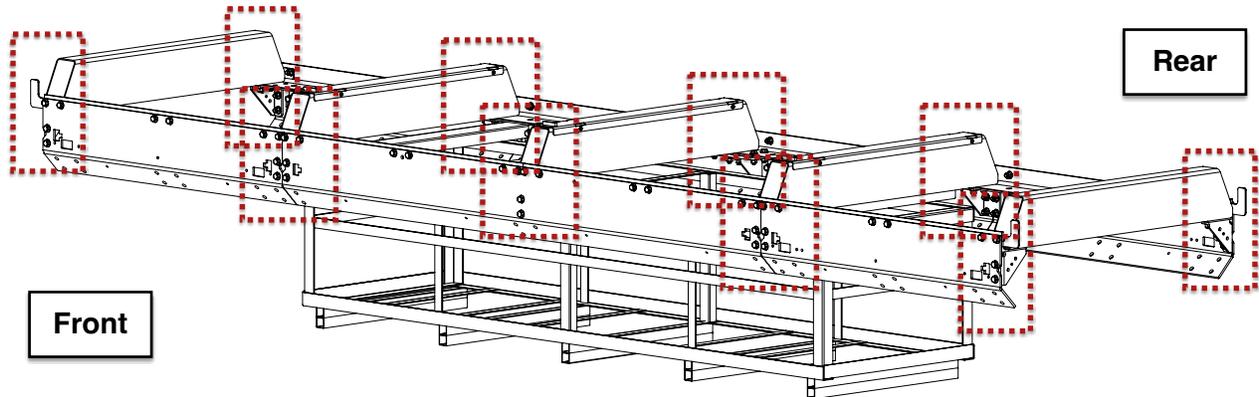


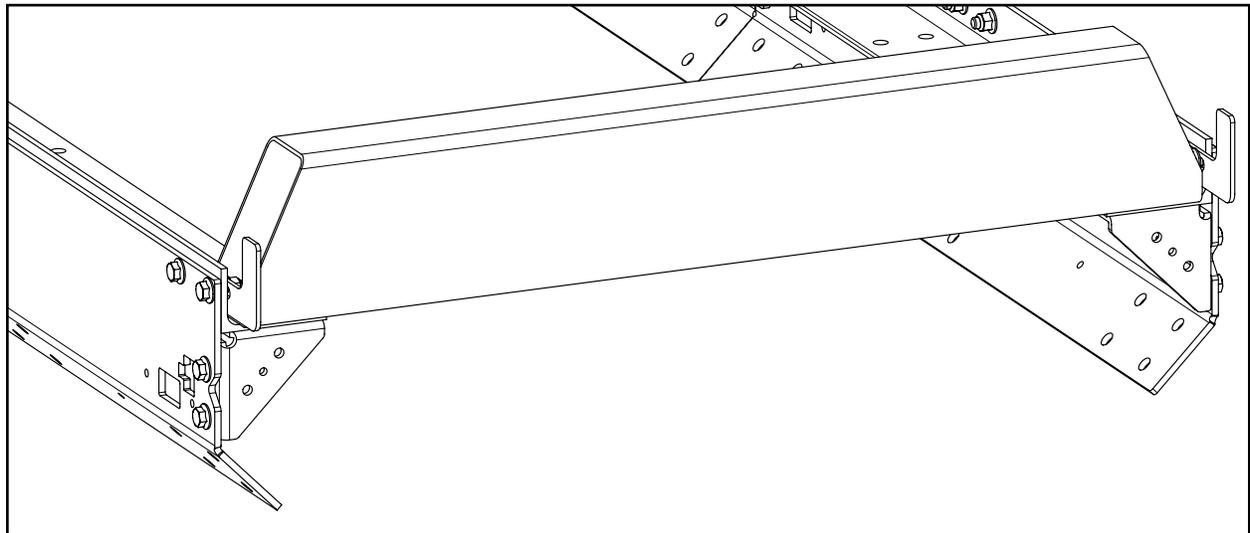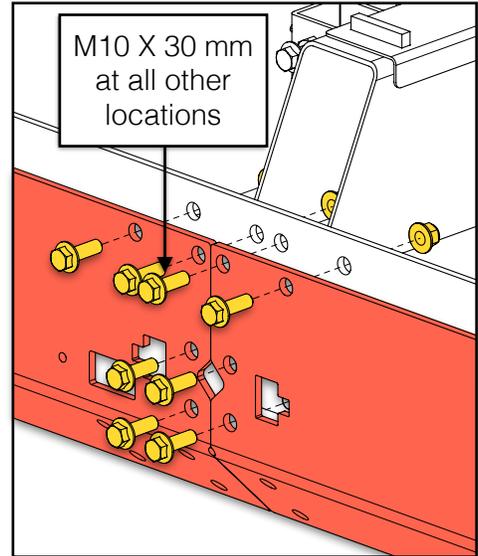
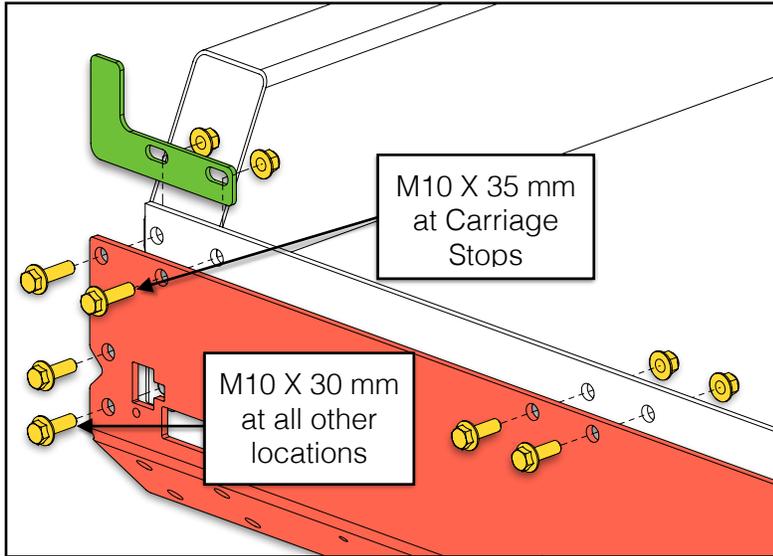


4. FRONT AND REAR CROSS BEAMS

Using the hardware listed below, install the front and rear cross beams (2 front, 1 rear). Ensure the cross beam with the two holes is assembled at the front. Do not tighten these bolts.






24x	M10 X 30 mm Flanged Hex Bolt		1x	Front Cross Beam	
24x	M10 Flanged Lock Nut		1x	Tongue Cross Beam	
1x	Cross Beam				


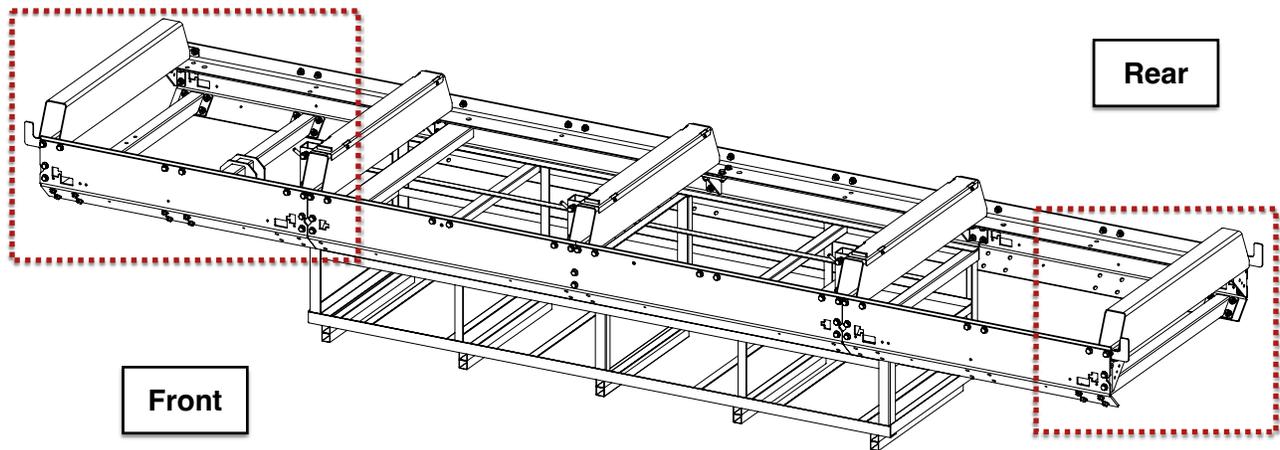


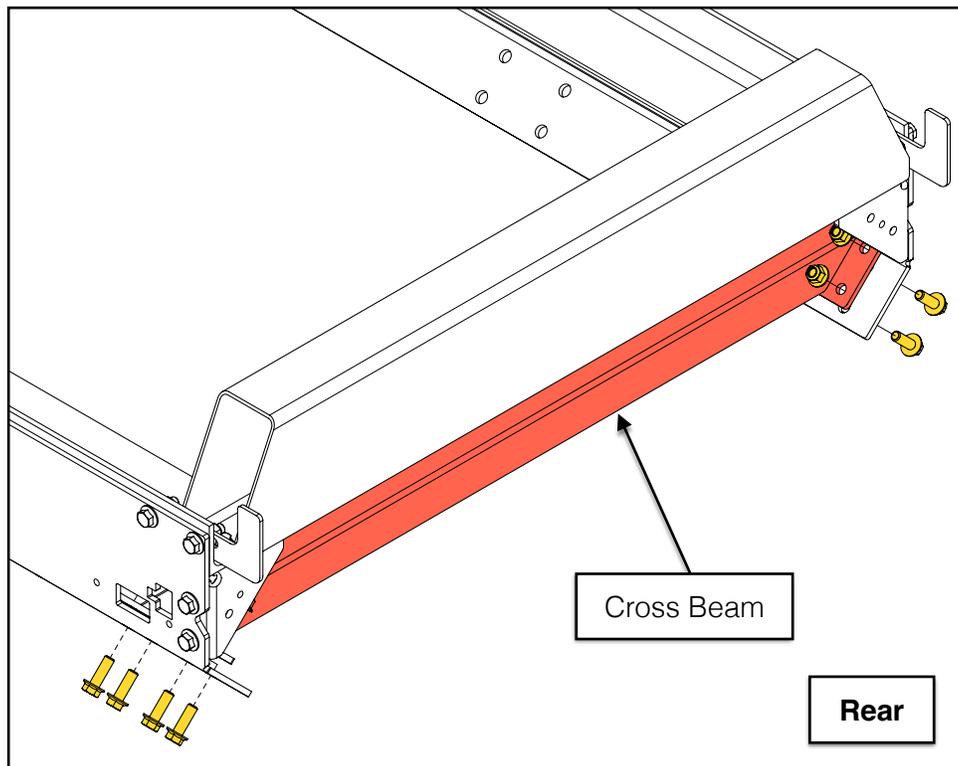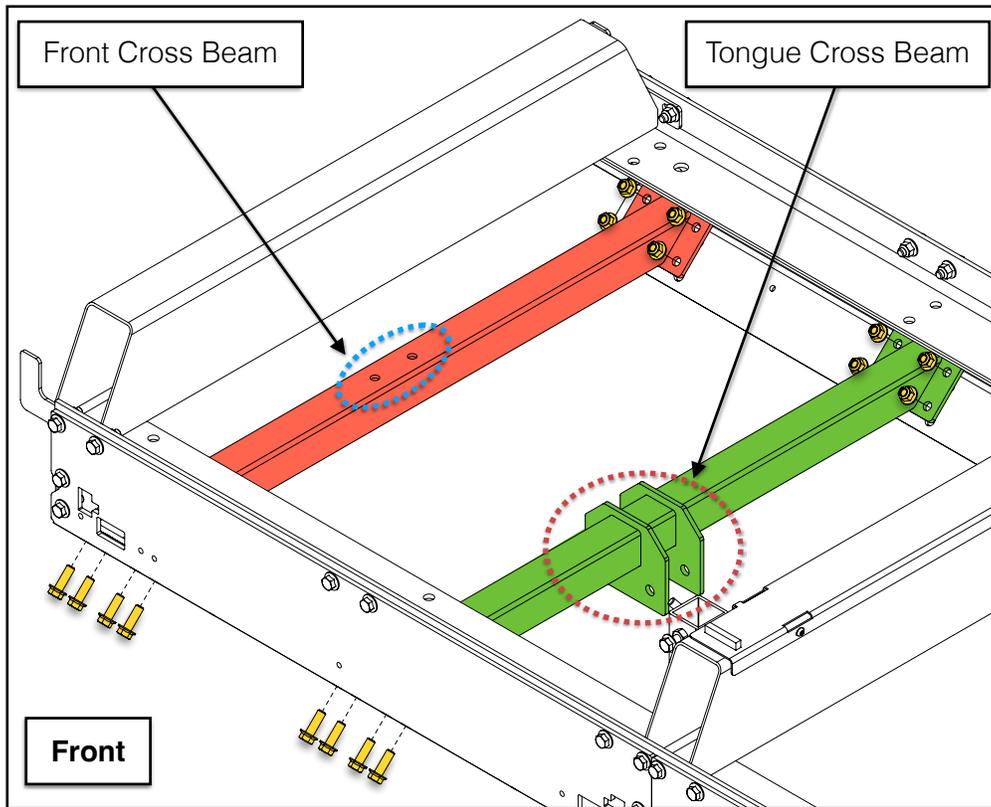


5. SIDE PLATE-TO-RAIL OFFSET & BOLT TORQUING

Install the components listed below to assist with correcting any side plate-to-rail offsets and gaps. Snug the M10x120 socket head cap screws, but do not fully tighten them. They will be torqued in the following steps.

4x	M10 X 120 mm Socket Head Cap Screw		4x	Side Plate Alignment Jaw	
4x	Side Plate Alignment Diamond		4x	Swivel Jack	
4x	Side Plate Alignment Nut		1x [2x]	Swivel Jack Handle	

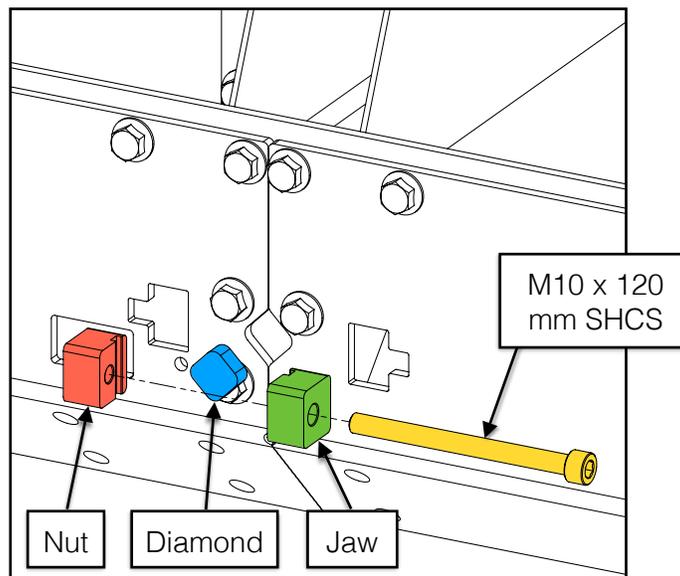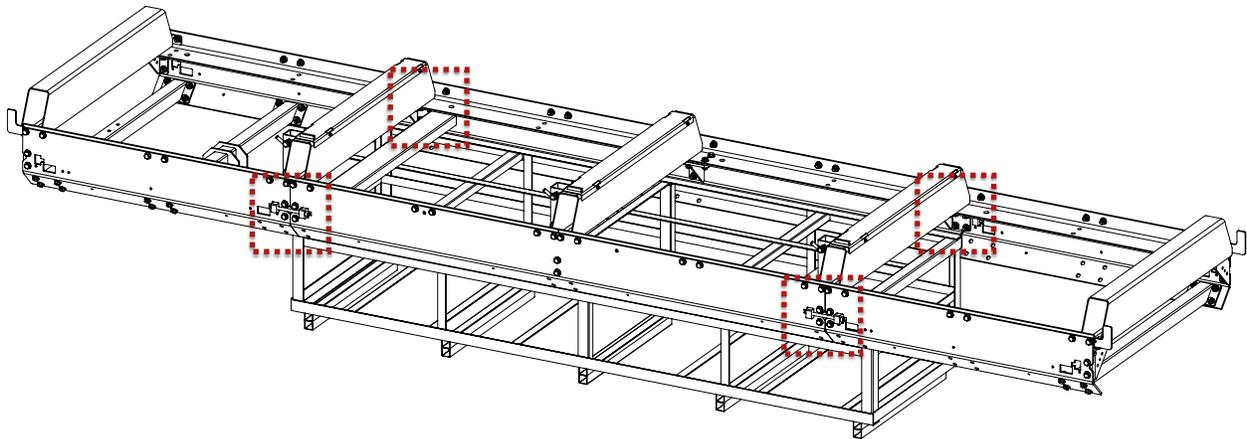


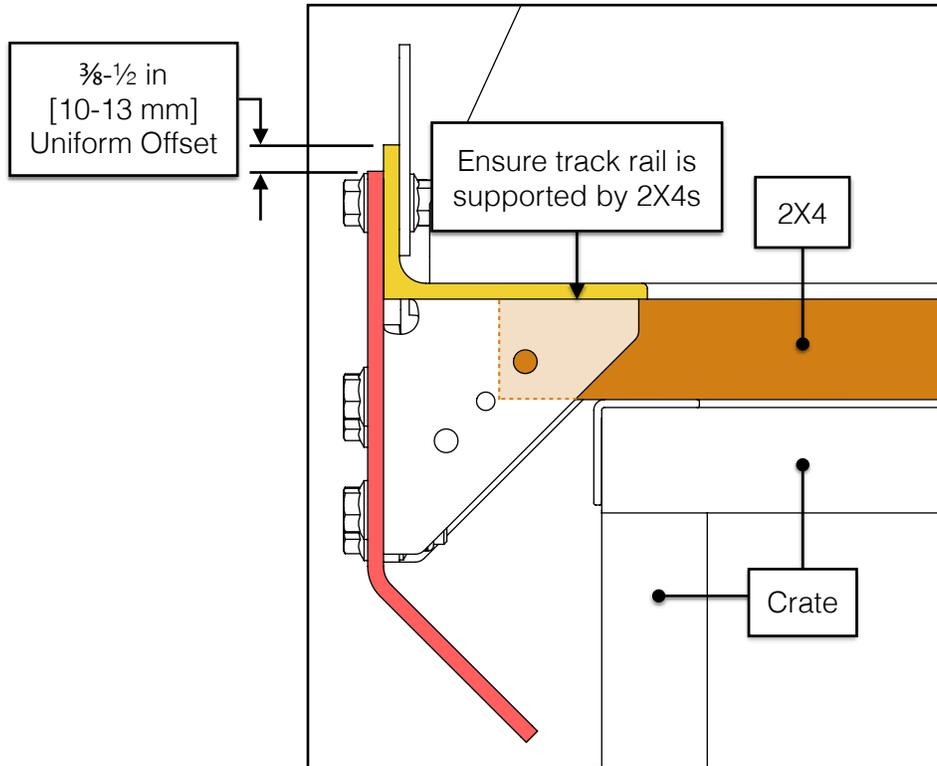Before torquing the chassis bolts as shown on the following 3 pages, verify there is a $\frac{3}{8}$ - $\frac{1}{2}$ in [10-13 mm] offset between the top of the track rails and the top of the side plates. The offset must be uniform along the entire length of the trailer on both sides.




If the offset is not uniform, ensure the track is sitting on the 2X4s and not the crate. The side plates need to hang from the rails unobstructed, with only the force of gravity pulling them down.

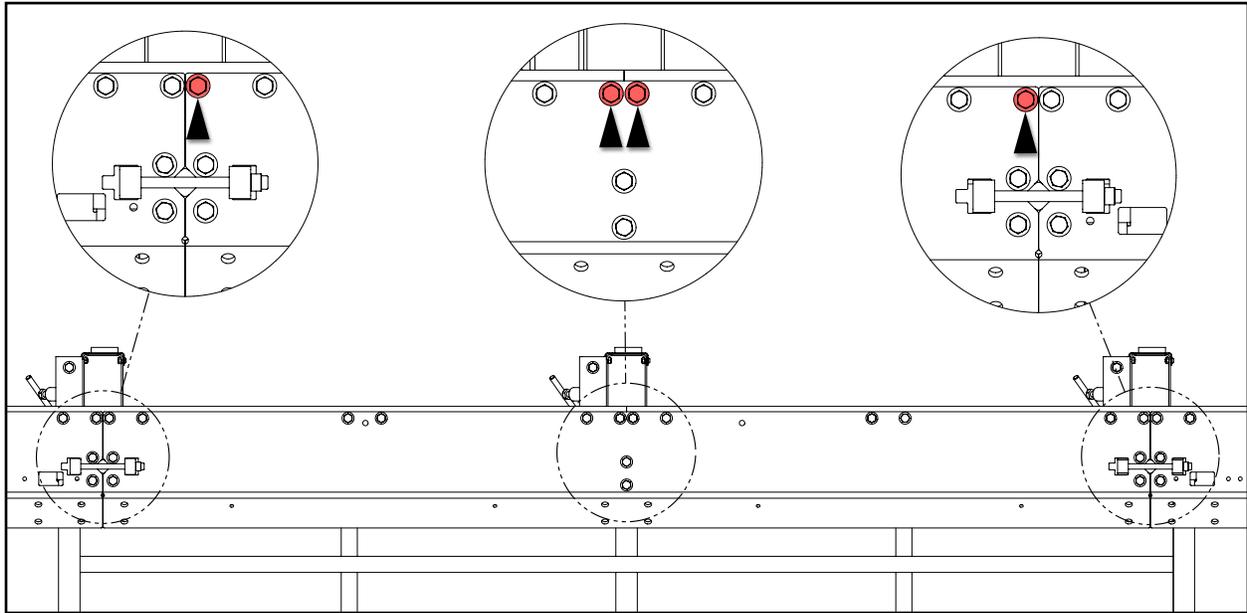Ensuring the side plate-to-rail offset is uniform, tighten and torque *only* the four (4) highlighted bolts securing the long side plate. Do this for both sides of the trailer.




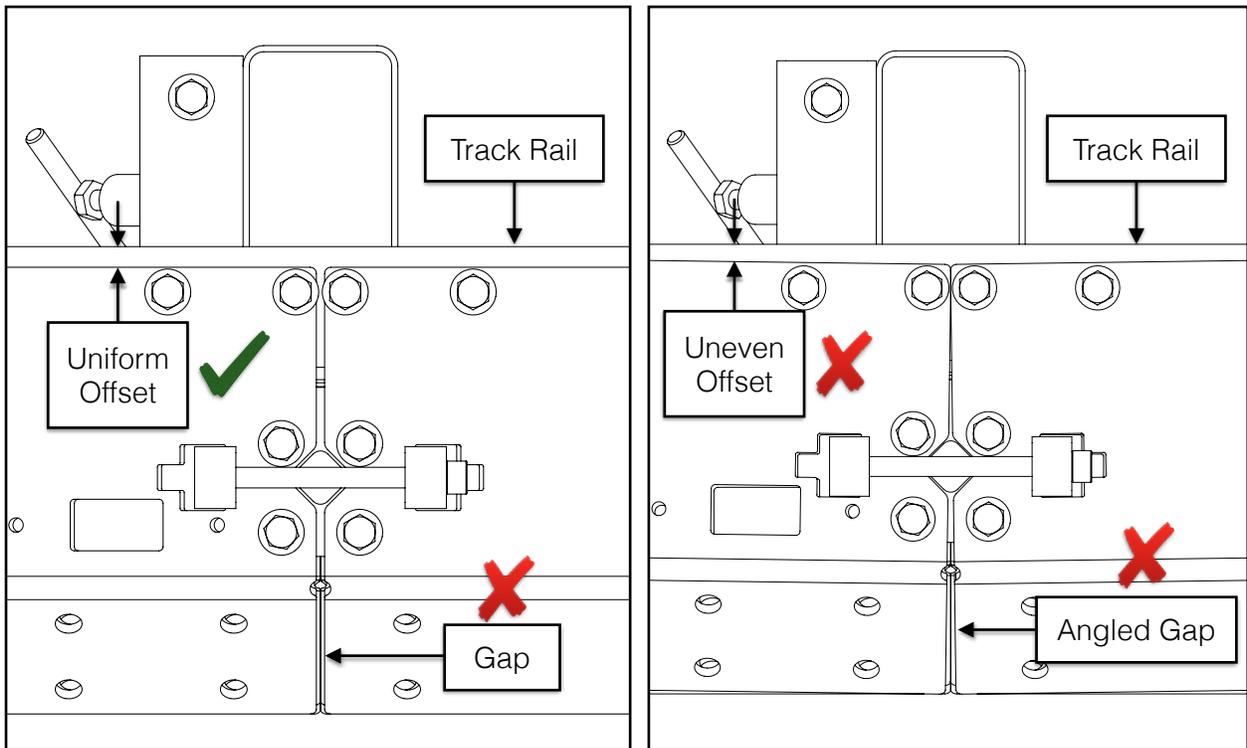With the long side plate secured in place, note the gaps (if any) between the short side plates and the long side plates.




If there are gaps, they can be closed by tightening the M10 X 120 mm Socket Head Cap Screw.

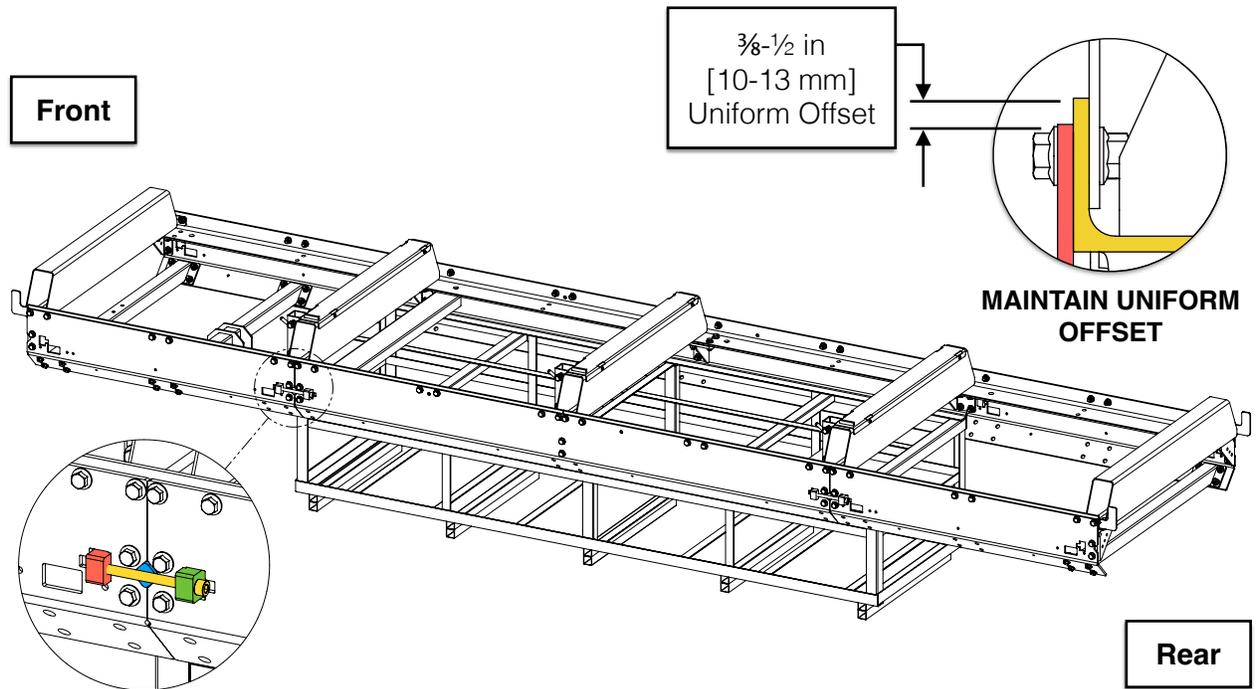
Tighten all four (4) M10 X 120 mm Socket Head Cap Screws to close the gaps. Remember to maintain a uniform offset between the top of the track rails and the top of the side plates when tightening the alignment hardware.



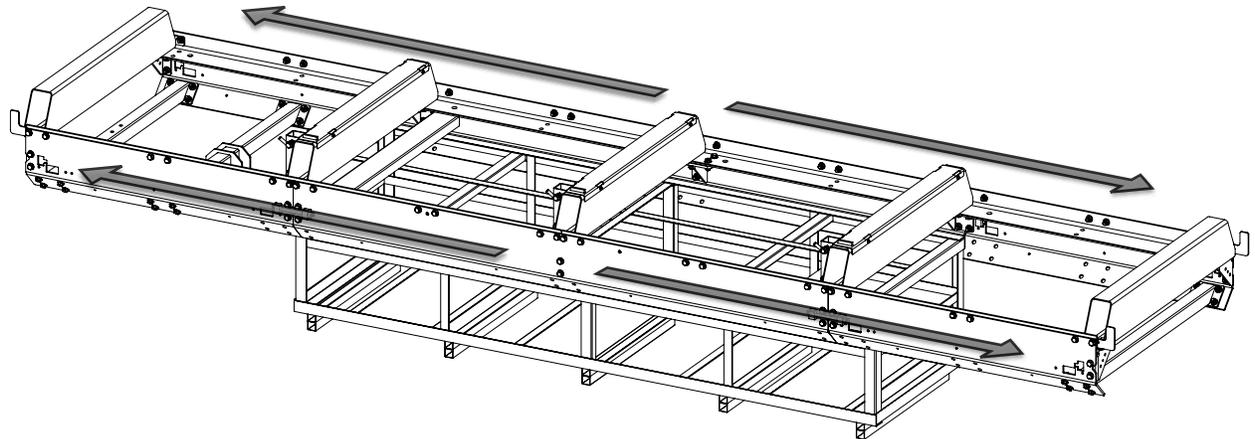While maintaining a uniform side plate-to-rail offset, torque the remaining bolts per the table in section, ***BOLT TORQUE SPECIFICATIONS***, starting from the centre and working towards the outer ends. Torque the M10x120 socket head cap screws used for the side plate alignment. Ensure the track is straight, level, and square during this procedure.







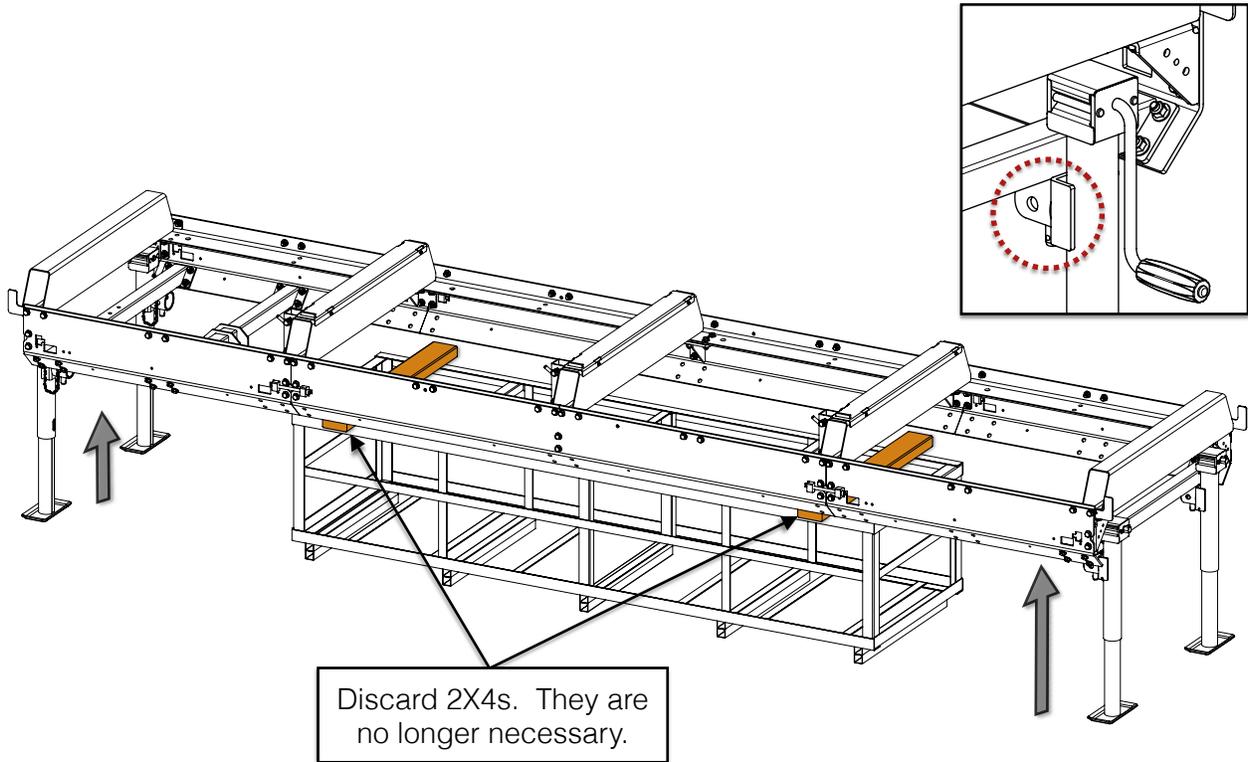
Position the swivel jack receivers under the front and rear *cross beams* as shown below and raise the assembly until the side plates are above the crate. Discard the two (2) 2X4s.




6. INNER CROSS BEAMS AND JACK MOUNTS


Using the hardware listed below, install the 2 remaining cross beams and 4 jack mounts. Torque all the bolts per the table in section **BOLT TORQUE SPECIFICATIONS**.

16x	M10 X 35 mm Flanged Hex Bolt		2x	Cross Beam	
16x	M10 Flanged Lock Nut		4x	Jack Mount	

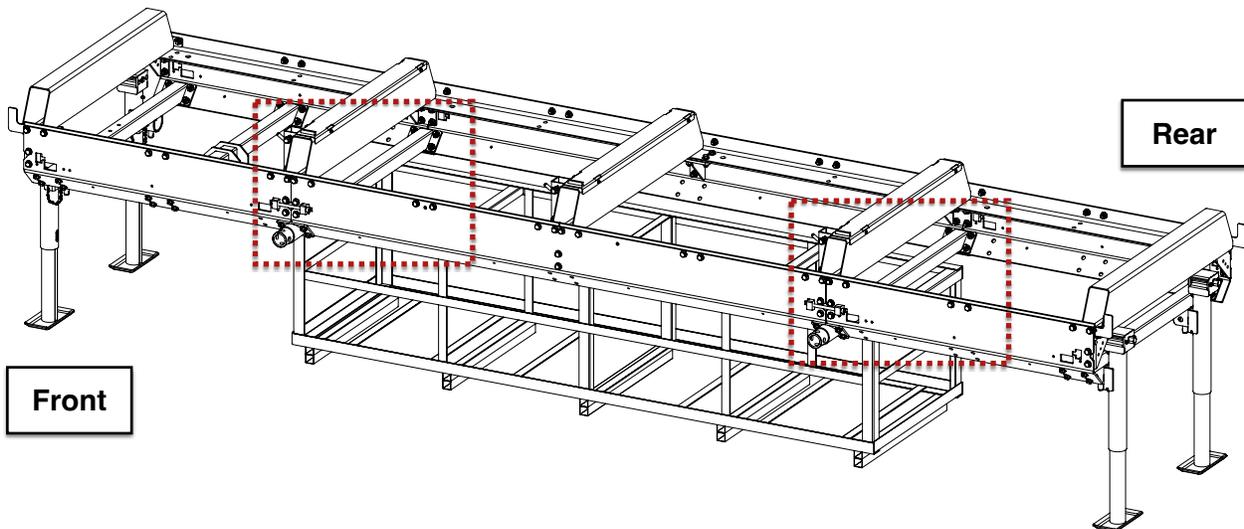


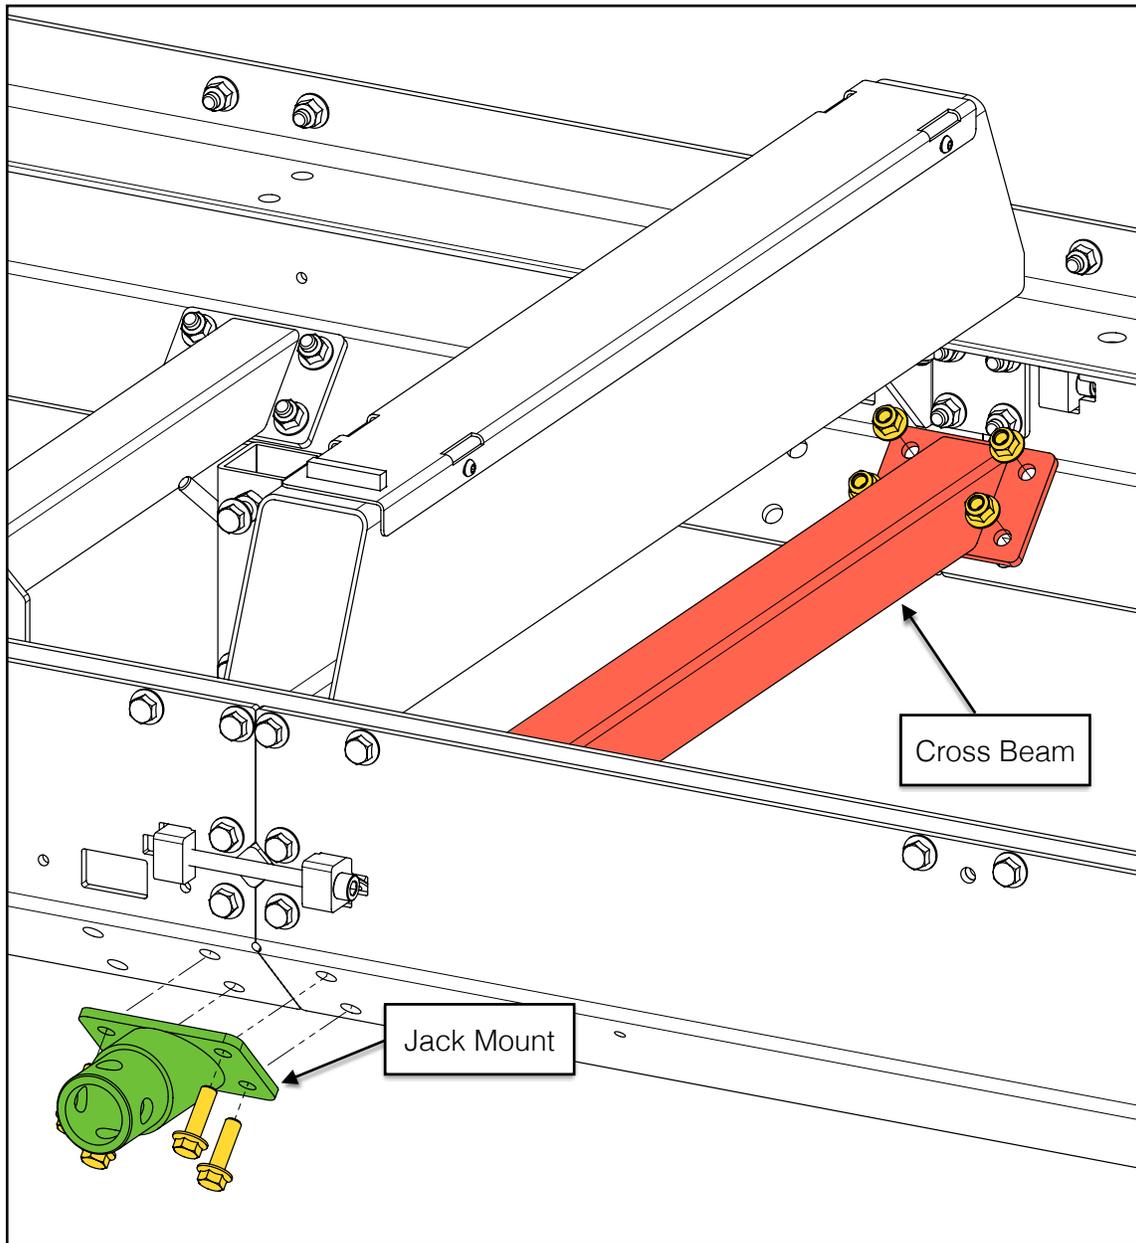

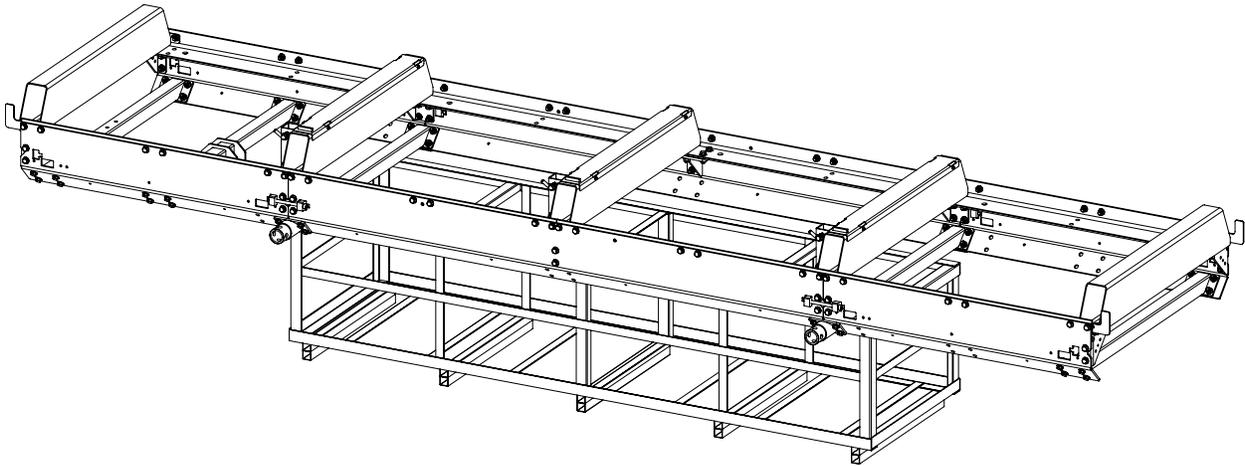Next, lower the trailer until the cross beams are resting on the crate.









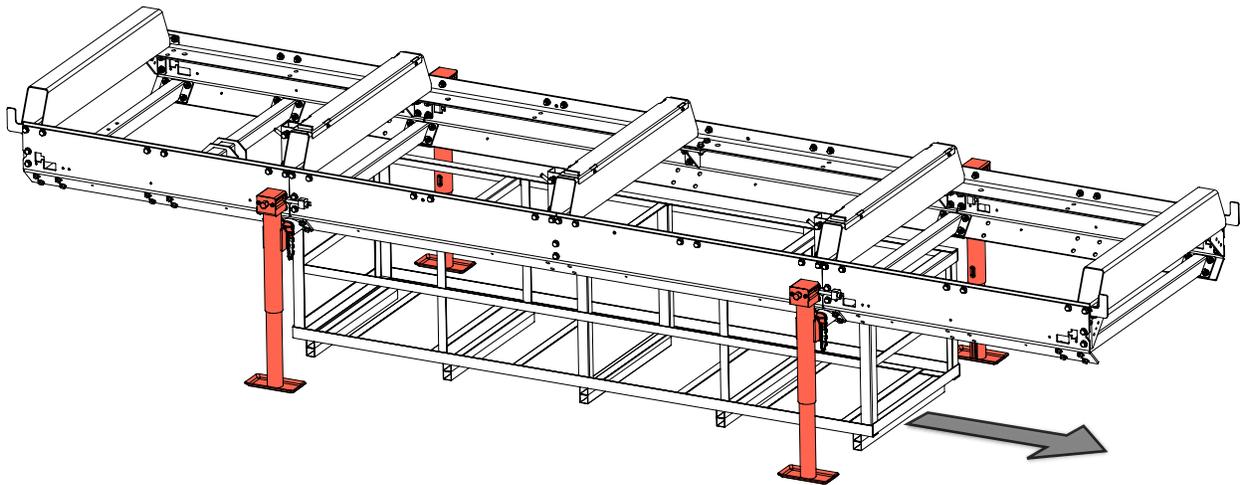
Slide the swivel jacks onto the jack mounts and secure them with the locking pins. Raise the jacks up to slide the crate out from under the trailer assembly. Place blocks of wood underneath each jack if necessary to achieve the required clearance.




7. AXLE MOUNTS AND AXLE CROSS BEAM

Using the hardware listed below, install the axle mount cross beam and left/right axle mounts with fender adapter as shown. Tighten these bolts.





8x	M10 X 35 mm Flanged Hex Bolt		1x	Axle Mount w/ Fender Adapter [Left]	
8x	M10 Flanged Lock Nut		1x	Axle Mount w/ Fender Adapter [Right]	
2x	M10 X 30 mm Knob		1x	Axle Mount Cross Beam	

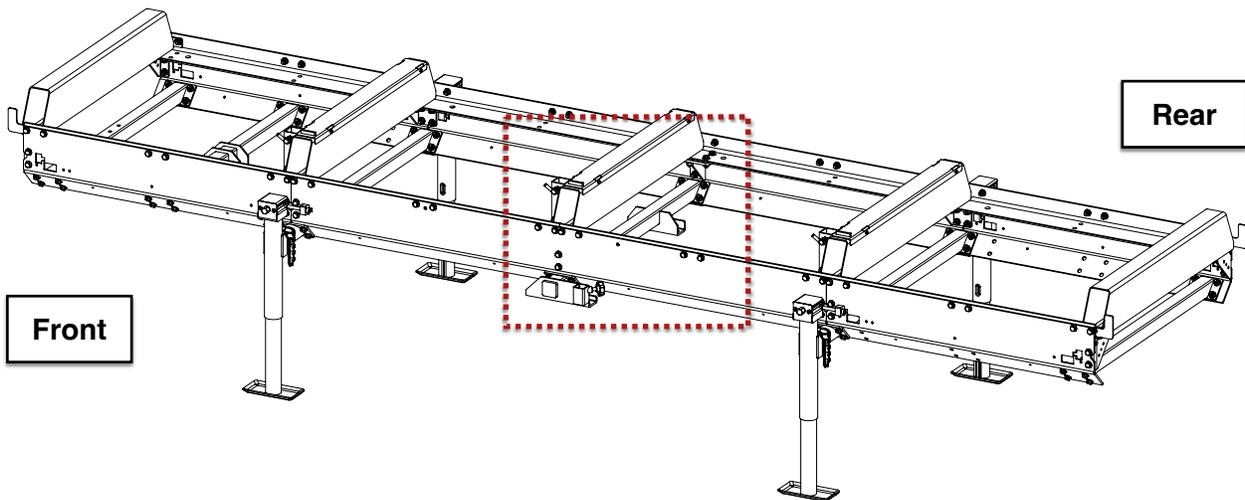


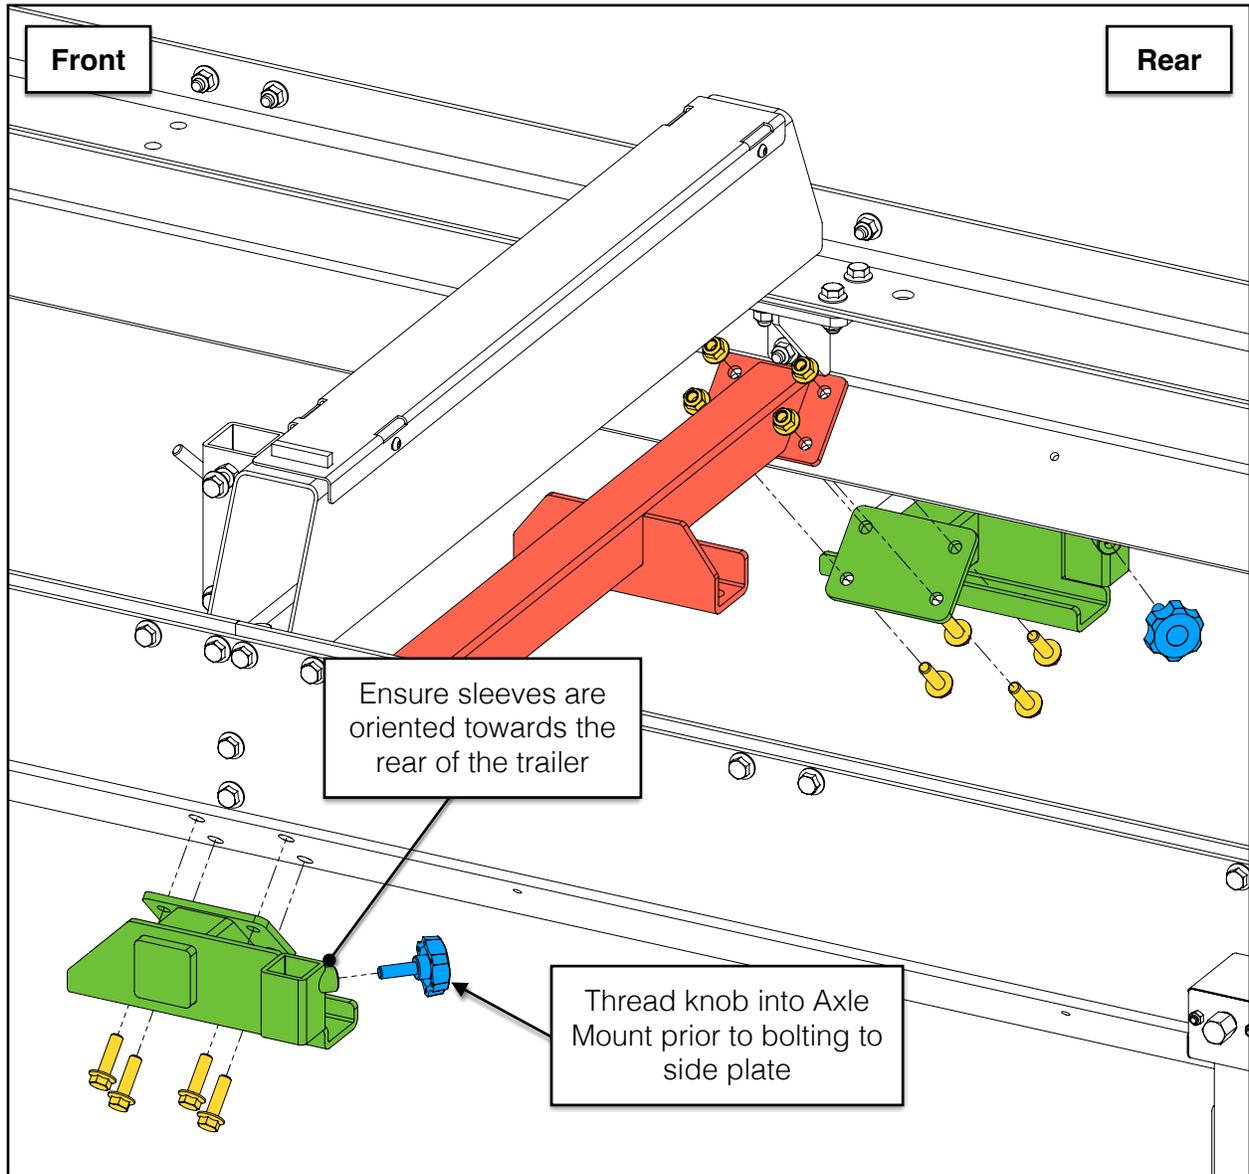



8. AXLE

Using the hardware listed below, install the axle as shown on the next page. Do not torque these bolts until instructed in step, **WHEELS**.

8x	M12 X 35 mm Flanged Hex Bolt		1x	Axle	
8x	M12 Flanged Lock Nut		[6x]	Axle Shim Plate	










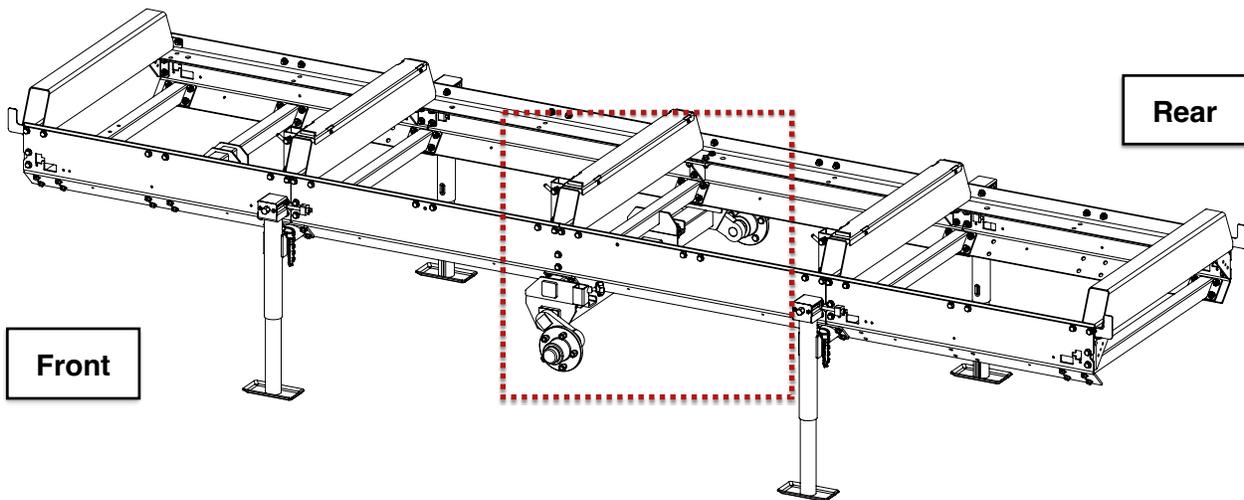


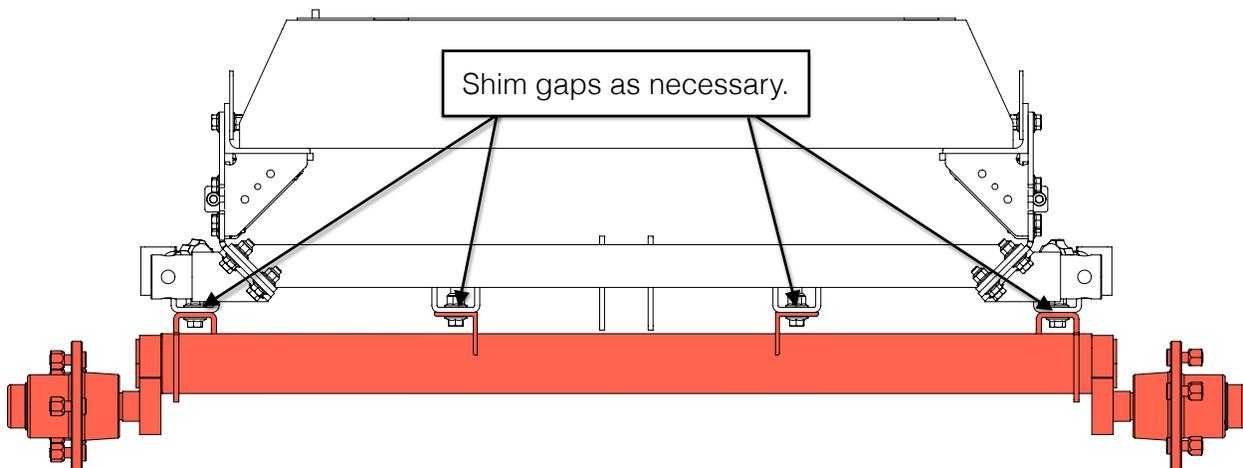
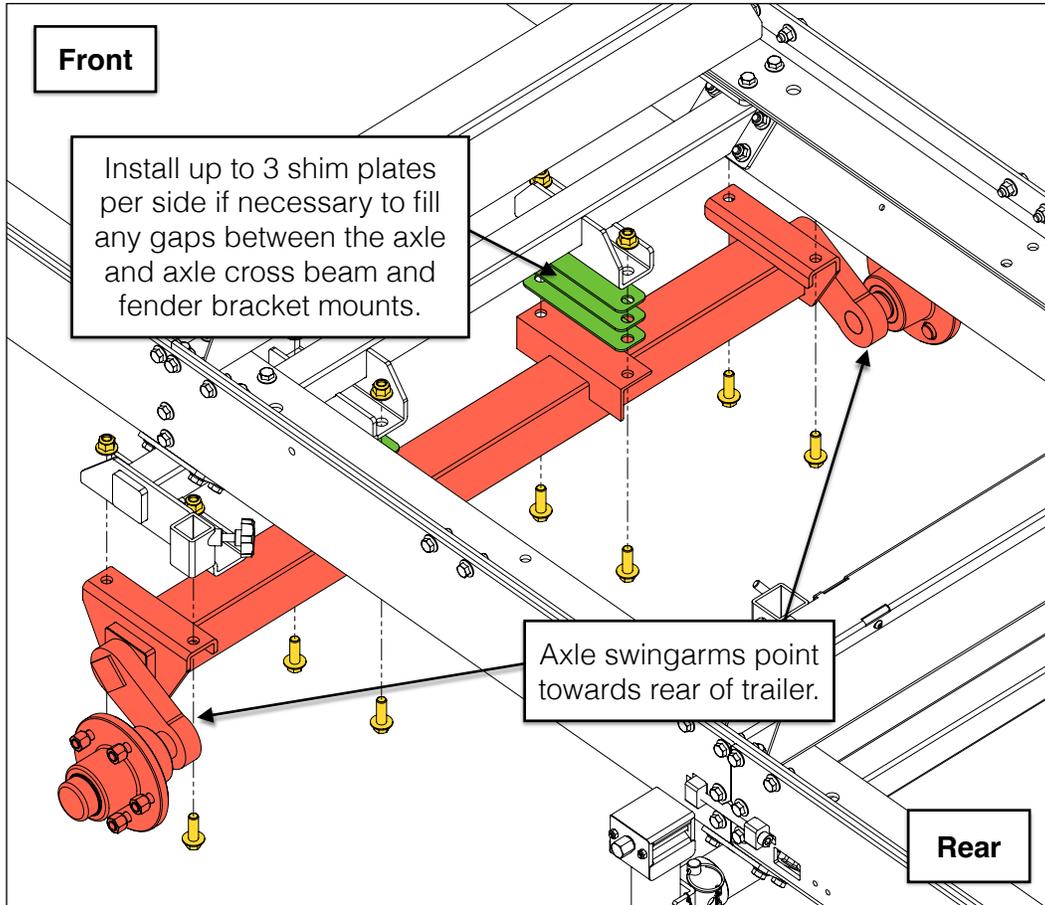
Check for gaps between the axle and fender bracket mounts and axle cross beam. If there are any gaps, use axle shim plates fill the gaps to prevent any flexing of the axle. The shims are not necessary if there are no gaps.



9. TONGUE AND COUPLER

Using the hardware listed below, install the trailer tongue and hitch coupler. Tighten these bolts.







2x	M12 X 100 mm Hex Bolt (Europe Only)		2x	M12 X 80 mm Flanged Hex Bolt	
2x	M12 X 70 mm Hex Bolt (North America)		2x	M12 Flanged Lock Nut	
2x	M12 Lock Nut		1x	Tongue	
2x	M10 X 160 mm Hex Bolt		1x	Hitch Coupler	
2x	M10 Flat Washer		1x	Tongue Bracket	
2x	M10 Lock Nut		1x	Locking Pin	

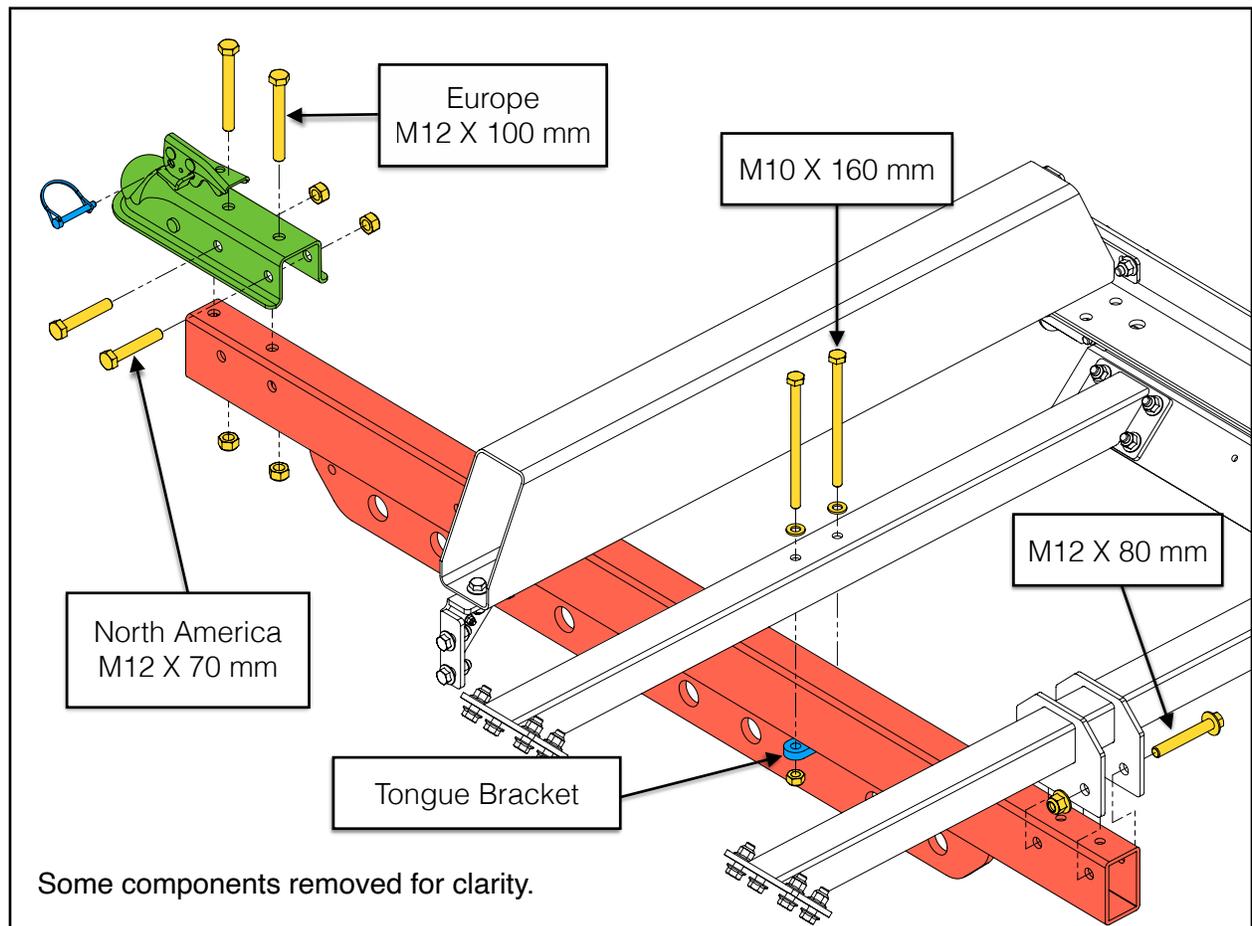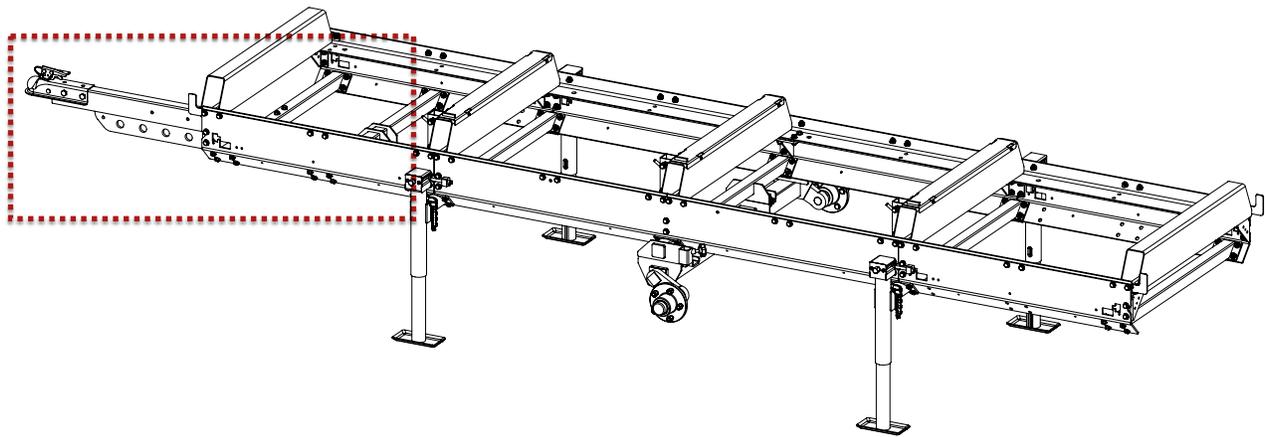



10. LIGHTING

Using the hardware listed below, install the taillight bracket and country appropriate wire harness. Use cable clamps to secure wire harness to side plates down right-side of trailer. Tighten all bolts.



On the European (**EU**) version, install the 4 side reflectors, 2 front reflectors, and 2 rear reflector brackets and reflectors as shown on the following pages. There are no red/amber side lights on the European wire harness like the ones included with the North American (**NA**) version.

4x	M8 X 25 mm Flanged Hex Bolt		1x	Taillight Bracket	
4x	M8 Flanged Lock Nut		2x	Rear Reflector Bracket (EU Only)	
8x	M6 X 20 mm Hex Bolt		2x	Rear Reflector (EU Only)	
8x	M6 Flat Washer		4x	Side Reflector (EU Only)	
8x	M6 Lock Nut		2x	Front Reflector (EU Only)	
12x	M5 X 20 mm Pan Head Screw (8x NA Only)		8x	Cable Clamp	
14x	M5 Flanged Lock Nut (8x NA Only)		1x	Wire Harness (NA Only)	
			1x	Wire Harness (EU Only)	

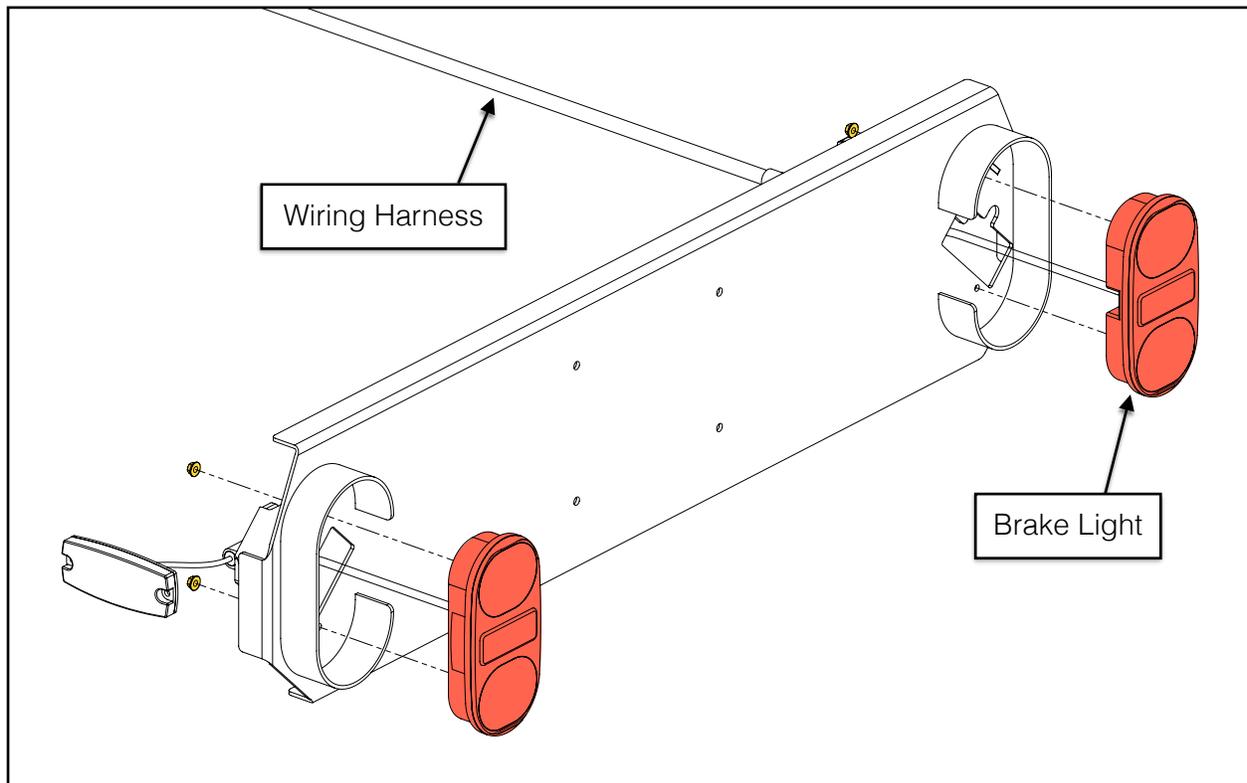
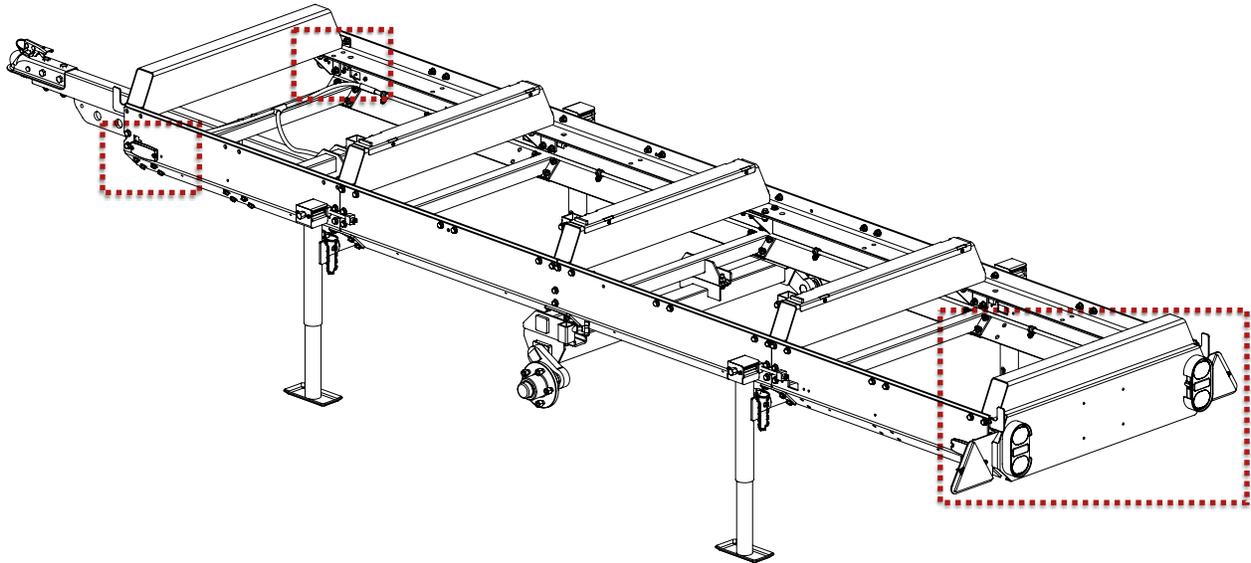
Secure tail lights to the taillight bracket using M5 flanged lock nuts before mounting taillight bracket to trailer.



****Note: Tail lights (North America and Europe) and side lights (North America only) are integral to the wire harness. They are shown exploded for assembly clarity.****

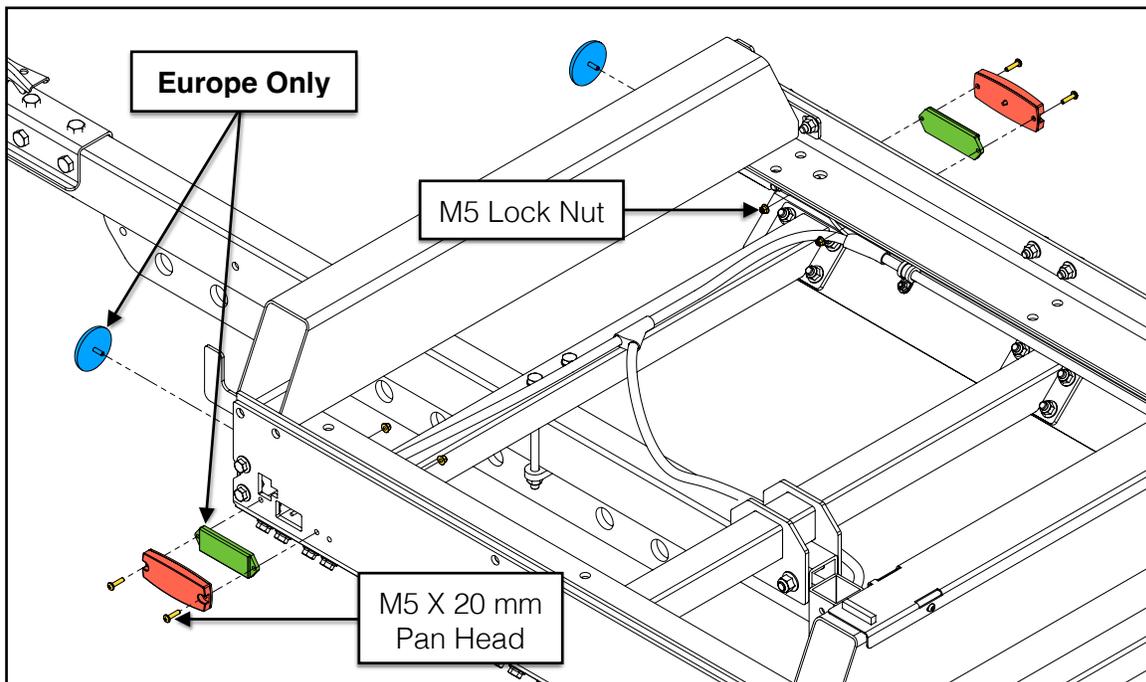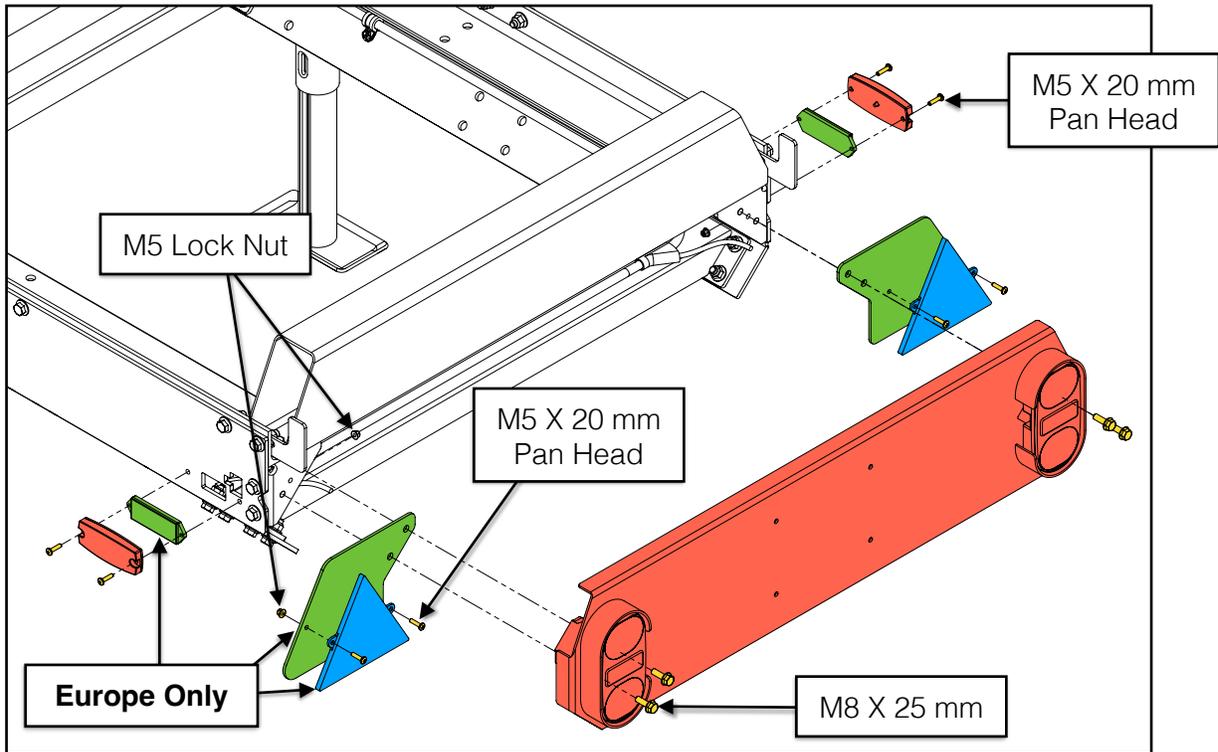


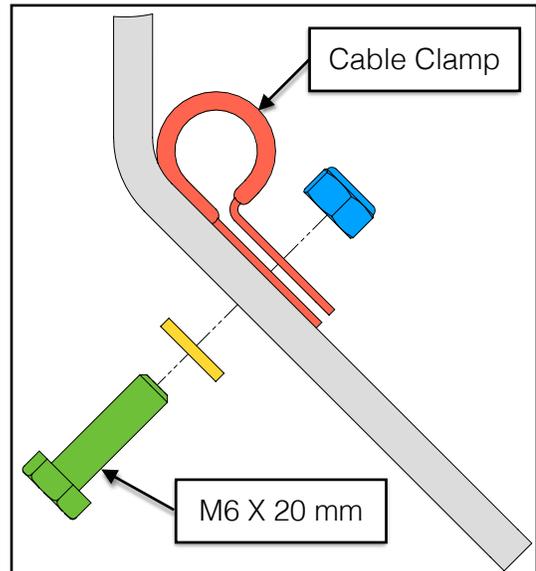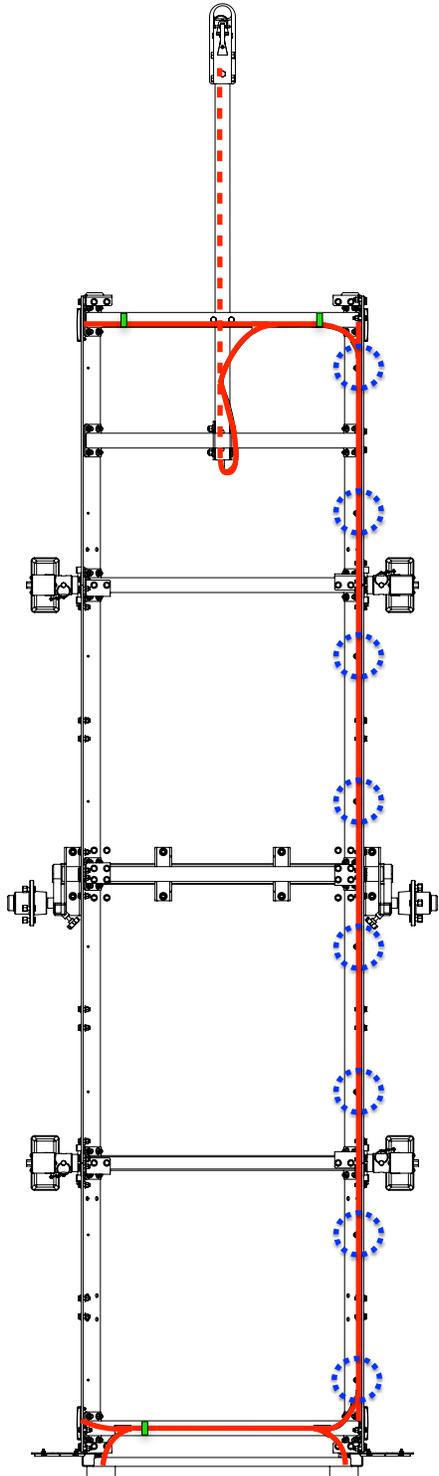
Cable clamps are installed down the right-hand side of the trailer only (locations circled blue). Use the M6 X 20 mm hex bolts, M6 washers, and M6 lock nuts as shown. This applies to both North American and European models. The wire harness routing is shown below, highlighted red. The excess wire harness should be cable tied to the cross beams, highlighted green.





11. NAMEPLATES

Using the hardware listed below, install the two (2) *Woodlander* nameplates as shown.



4x	M6 X 20 mm Hex Bolt		2x	Woodlander Nameplate	
4x	M6 Flat Washer		4x	M6 Lock Nut	

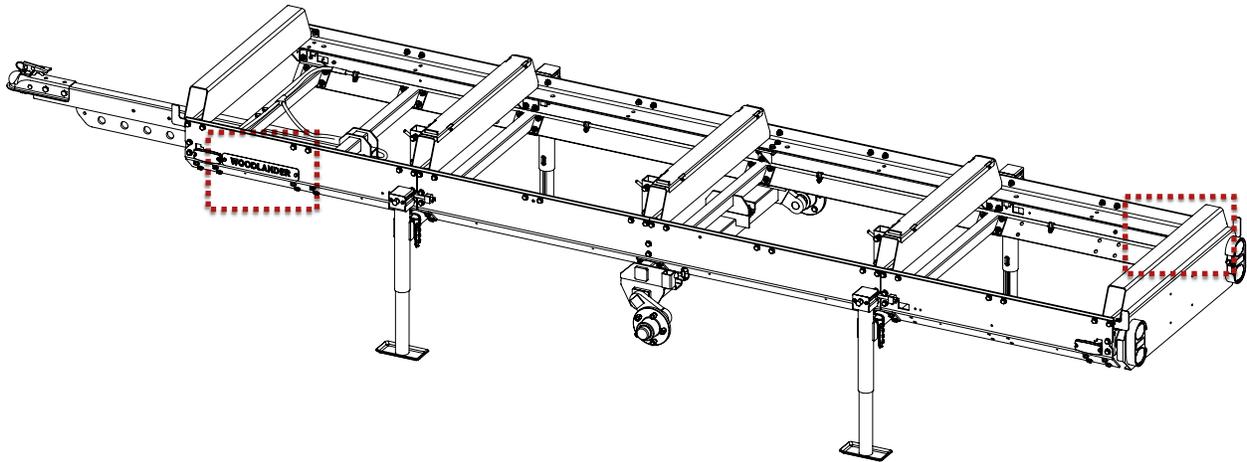

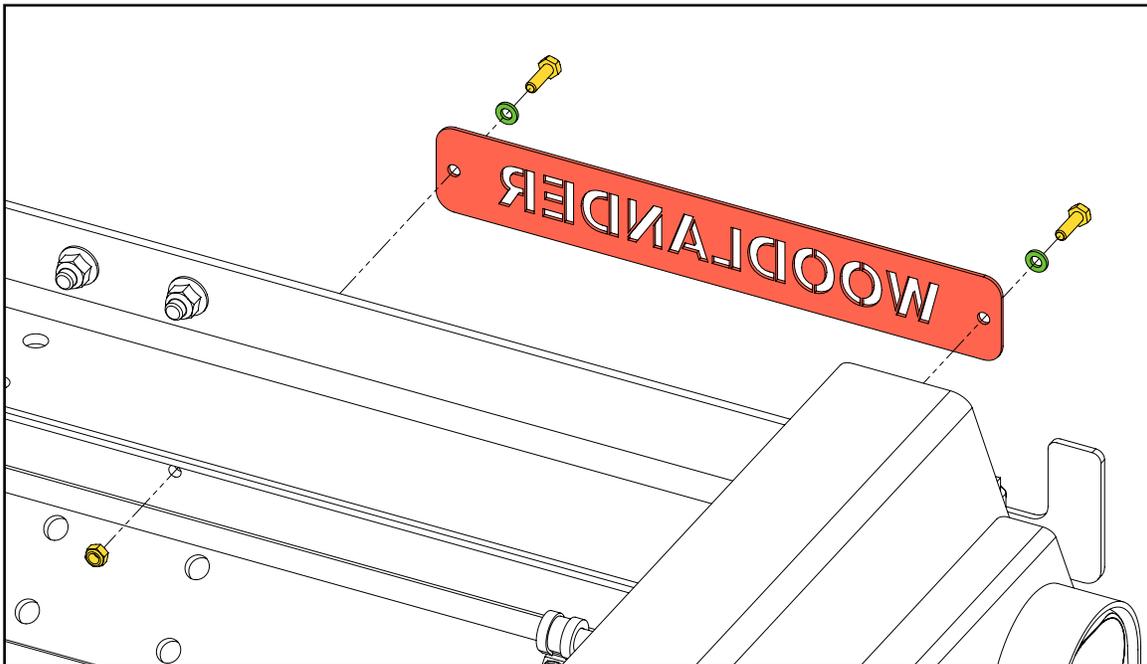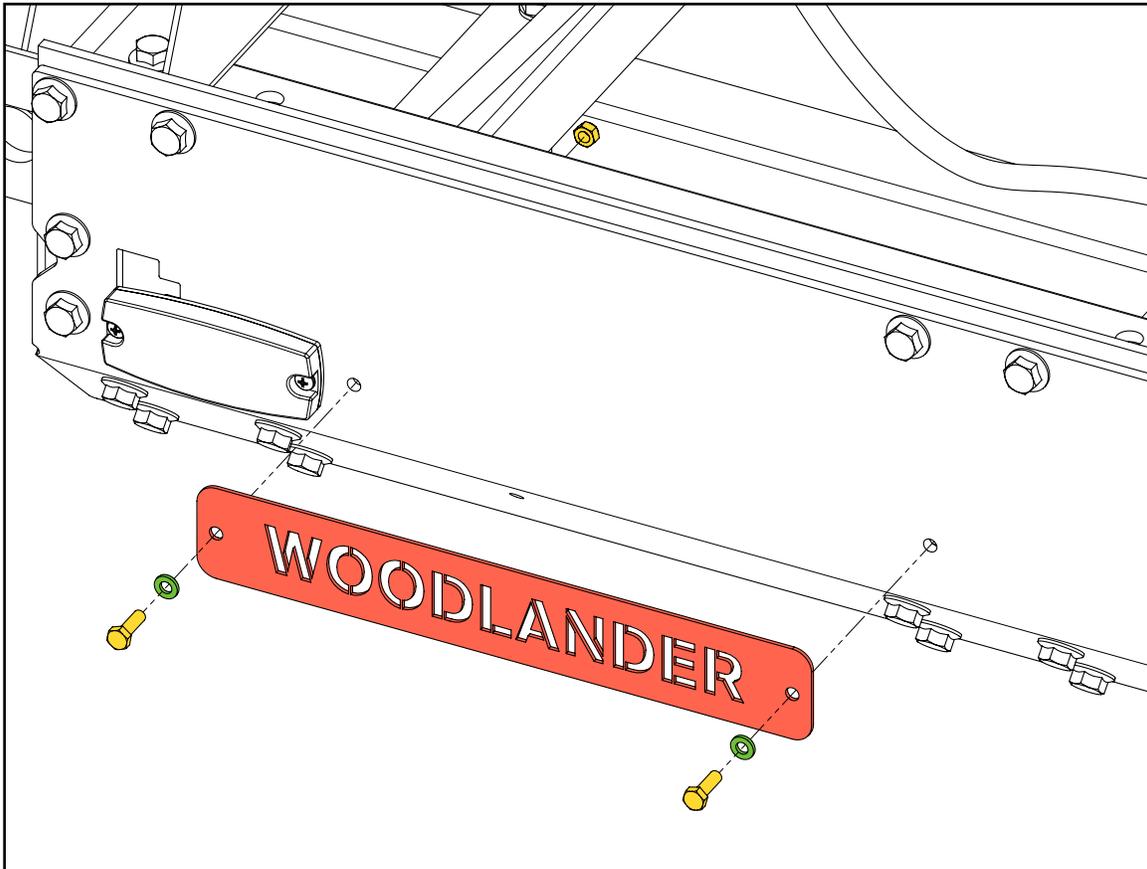


12. HEAD LOCK-DOWN PLATES


Place the assembled sawhead on the trailer. Using the hardware listed below, install the head lock down plates.

4x	M6 X 40 mm Hex Bolt		4x	Lock-Down Pin	
4x	M6 X 25 mm Hex Bolt		4x	Linch Pin	
16x	M6 Flat Washer		8x	Head Lock-Down Plate	
8x	M6 Lock Nut		1x	10 mm Drill Bit	

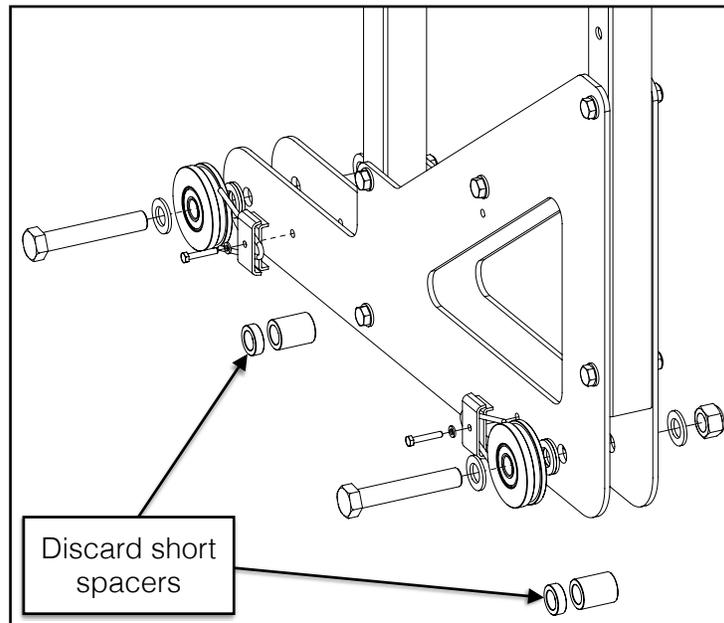Remove the eight (8) spacers from the carriage wheel axles and discard the four (4) short spacers. Only the four (4) tall spacers will be reused in the next steps.




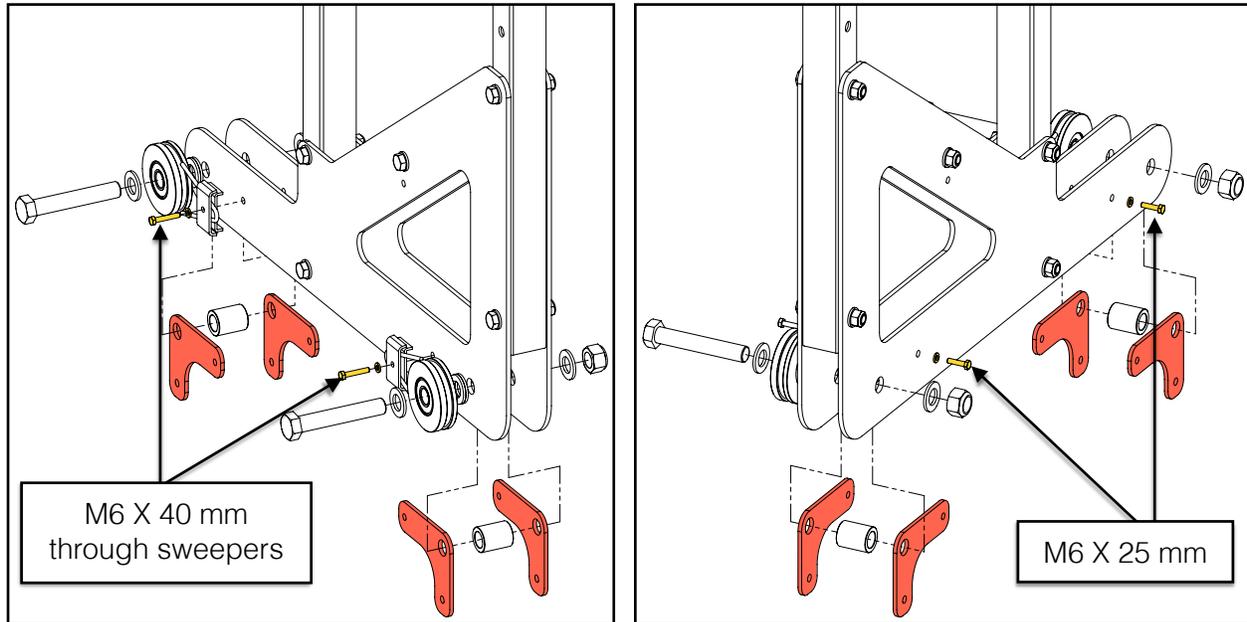Using the provided M6 X 40 mm and M6 X 25 mm bolts, install the lock-down plates in place of the short spacers with the taller spacer sandwiched between. Reuse the four (4) M6 flat washers from the wheel sweepers on the sawmill when replacing the bolts.





SAWHEAD CARRIAGE LOCK-DOWN POSITIONS

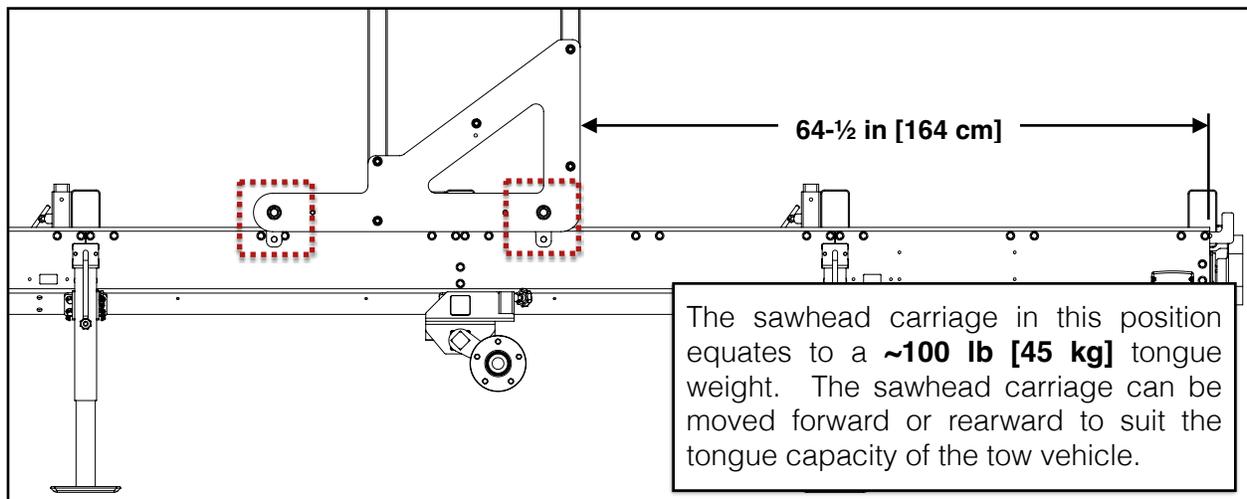When deciding where to position the sawhead carriage, it is important to consider the tongue weight capacity of the tow vehicle. Lighter tongue weights are better suited for ATVs and smaller vehicles while heavier tongue weights work well with larger vehicles like pickup trucks.



****Note: Tolerance on tongue weights is approx. ±15 lb [±7 kg] depending on how many accessories are installed (Lap Siding, Power Head, Log Loading Ramp Kit, Toolbox, Cant Hook, etc.)****

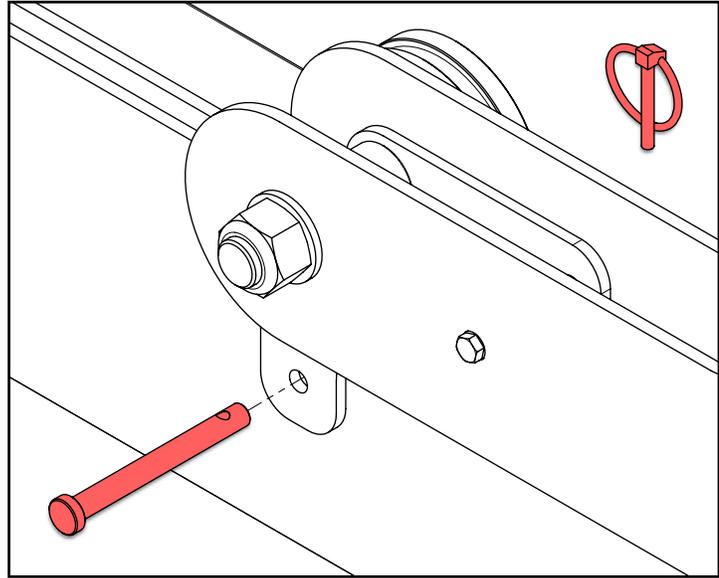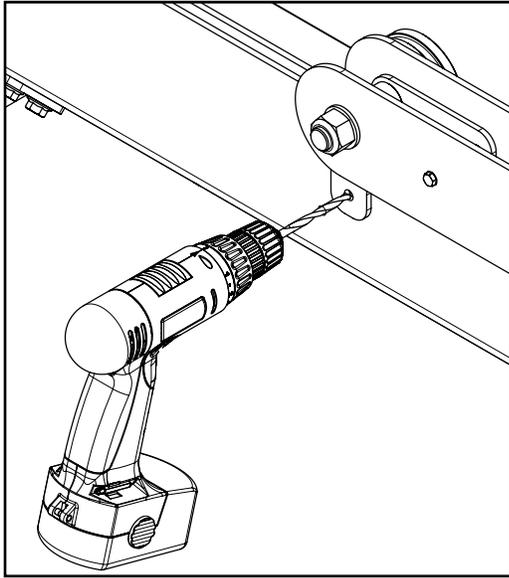Drill four (4) holes for the lock-down plates using the 10 mm [$\frac{3}{8}$ in] drill bit provided with the Sawmill. Measure between 59 and 63 in [1498 and 1600 mm] from the rear edge of the track rail (*not* the carriage stop) to the rear post of the sawhead. Insert a locking pin into each hole as they are drilled. Secure each locking pin with a linch pin.





WARNING!




Use cutting oil when drilling holes for lock-down brackets or else the heat generated could ruin the drill bit and produce a rough surface finish.



13. WHEELS


Using the hardware listed below, install the tires on the axles. Using a torque wrench, torque the lug nuts to 80 ft•lb / 110 N•m following the pattern shown below.

10x	M12 X 1.5 Lug Nut		2x	5.30-12 Wheel	
-----	-------------------	---	----	---------------	---

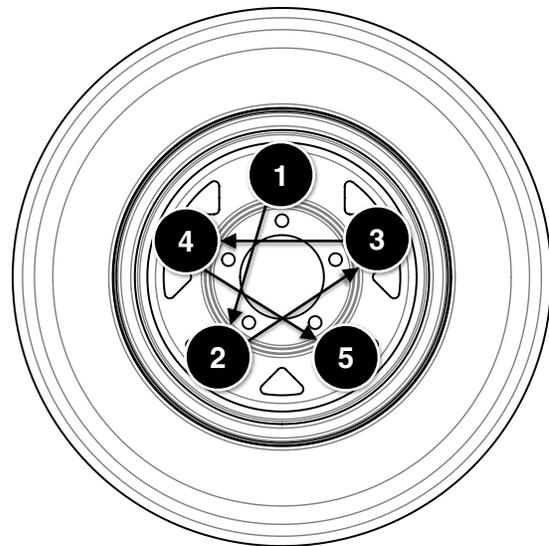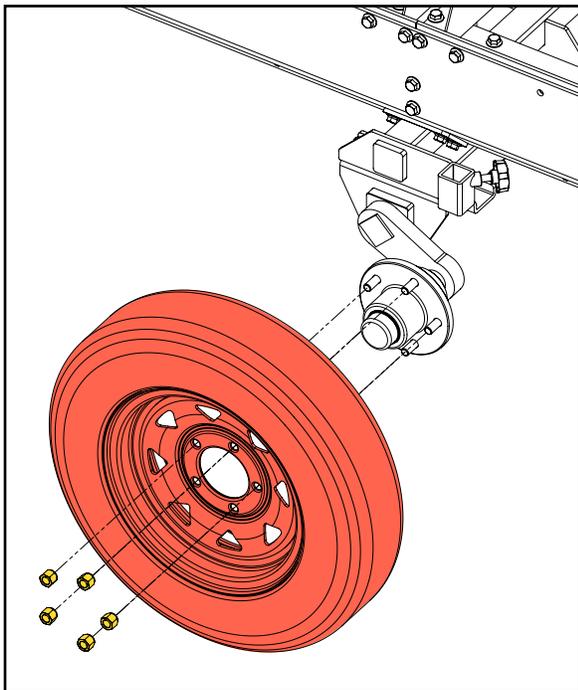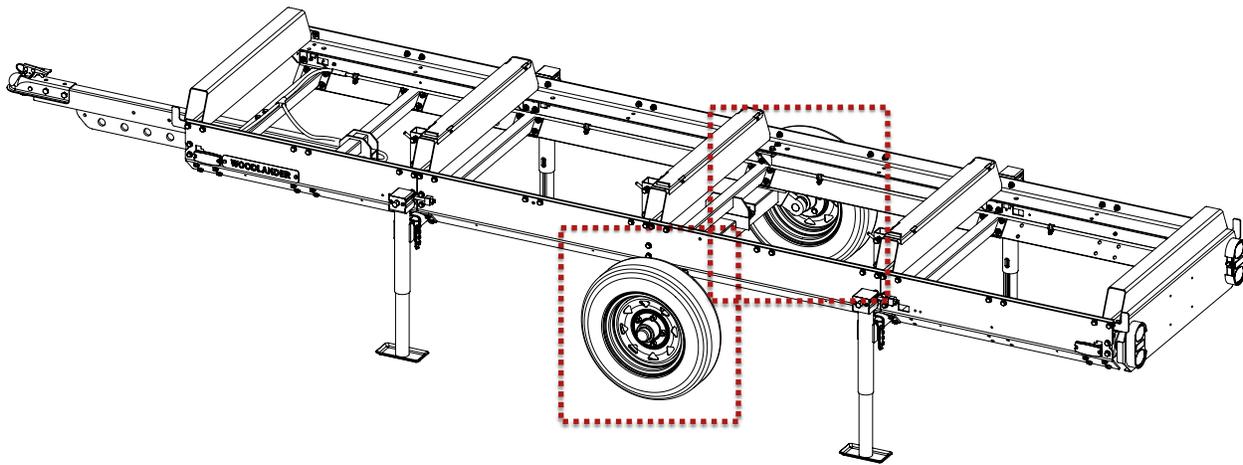

WHEEL ALIGNMENT ADJUSTMENT

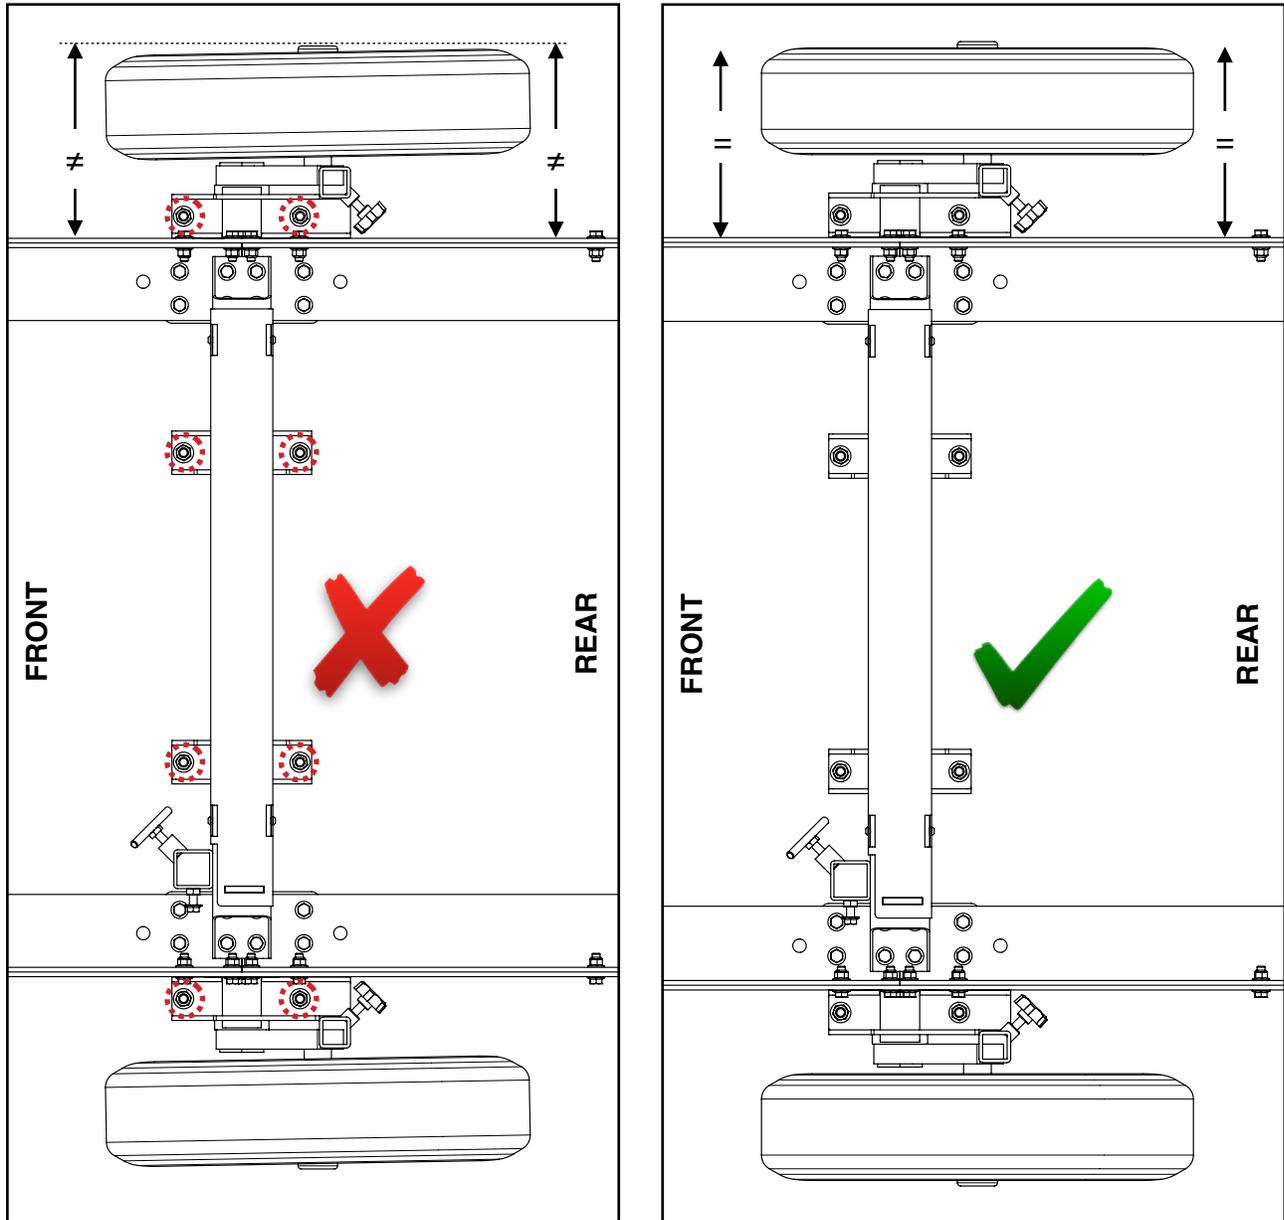With the wheels installed, observe their alignment to the side plates. If the wheels are not parallel to the side plates, the axle position needs to be adjusted before the trailer can be towed behind a vehicle.







MISALIGNMENT


ALIGNED

If the wheels are parallel, tighten the axle bolts to the ***specified torque*** and proceed to the next section. However, if the wheels are *not* parallel, loosen the four (4) M12 bolts on the affected axle(s). Rotate the axle assembly and wheel until the wheels are parallel. Then tighten the axle bolts to the ***specified torque***.


14. FENDERS

Using the hardware listed below, assemble the fenders to the fender brackets.


8x	M8 X 20 mm Flanged Hex Bolt		2x	Fender Bracket	
8x	M8 Flanged Lock Nut		2x	Fender	
			2x	Locking Pin	

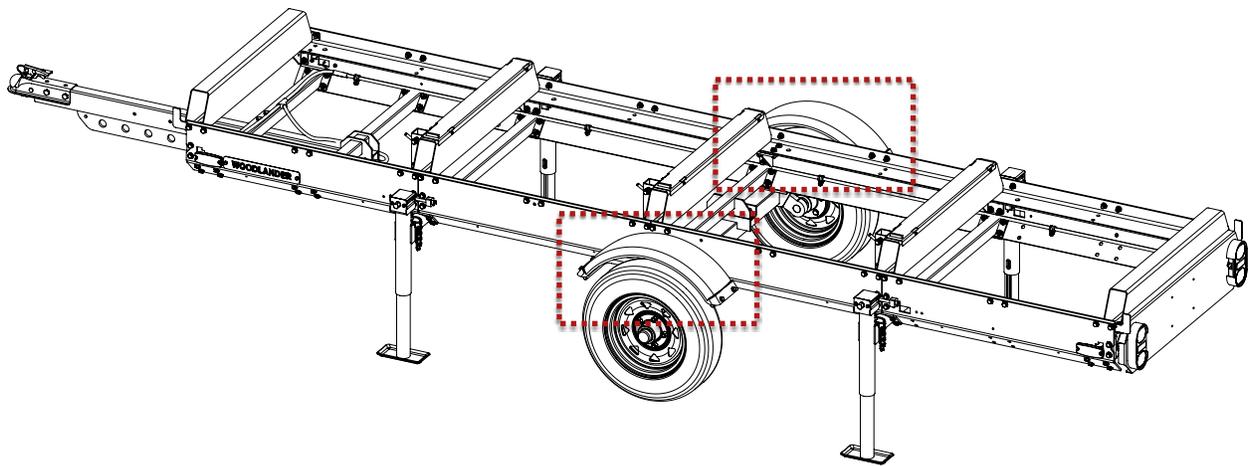

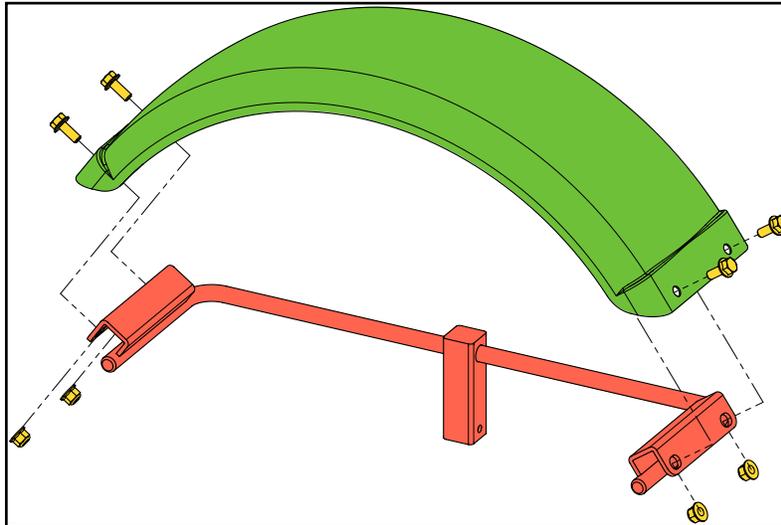Fasten a metal fender to each fender bracket using four (4) M8 X 20 mm bolts and four (4) M8 flanged lock nuts. Fully tighten these bolts.







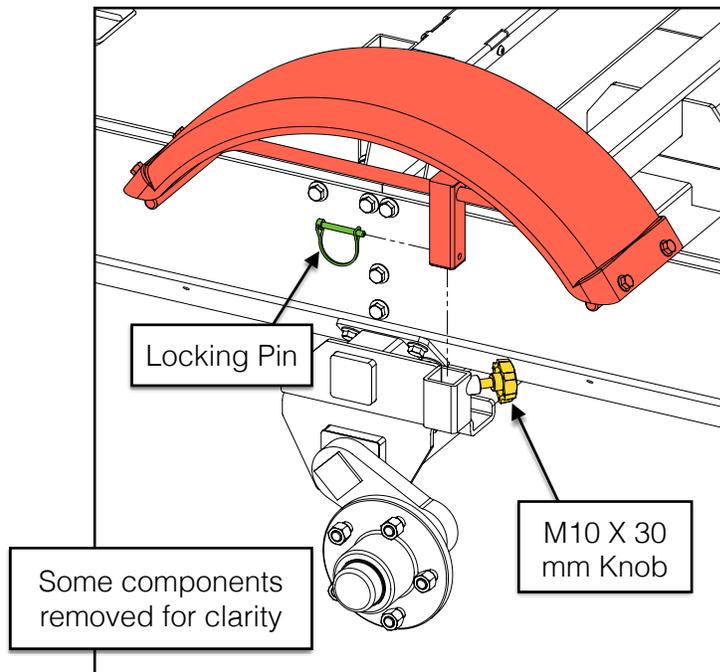
Slide the post on the fender bracket into the sleeve on the axle mount and insert the locking pin through the hole located at the bottom of the fender bracket post. Secure the fender/fender bracket sub-assembly using the M10 X 30 mm knob by threading it into the axle mount until tight.



15. SAFETY CHAIN

Using the hardware below, install the safety chain on the trailer tongue.


1x	M10 X 40 mm Hex Bolt		1x	Safety Chain	
2x	M10 Flat Washer				
1x	M10 Lock Nut				

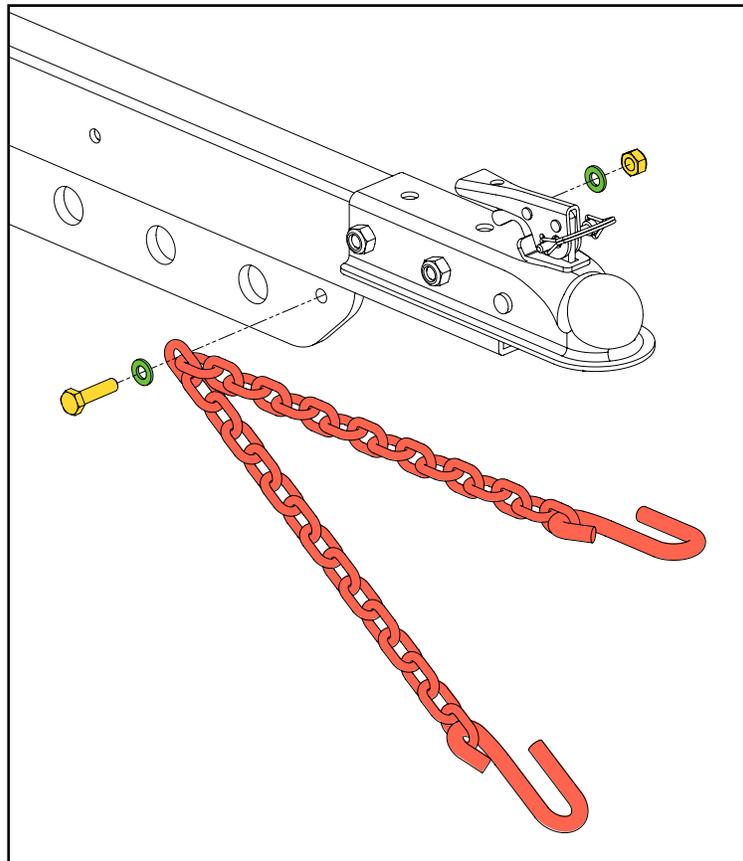


OPERATION

LOCKING-DOWN THE SAWMILL HEAD

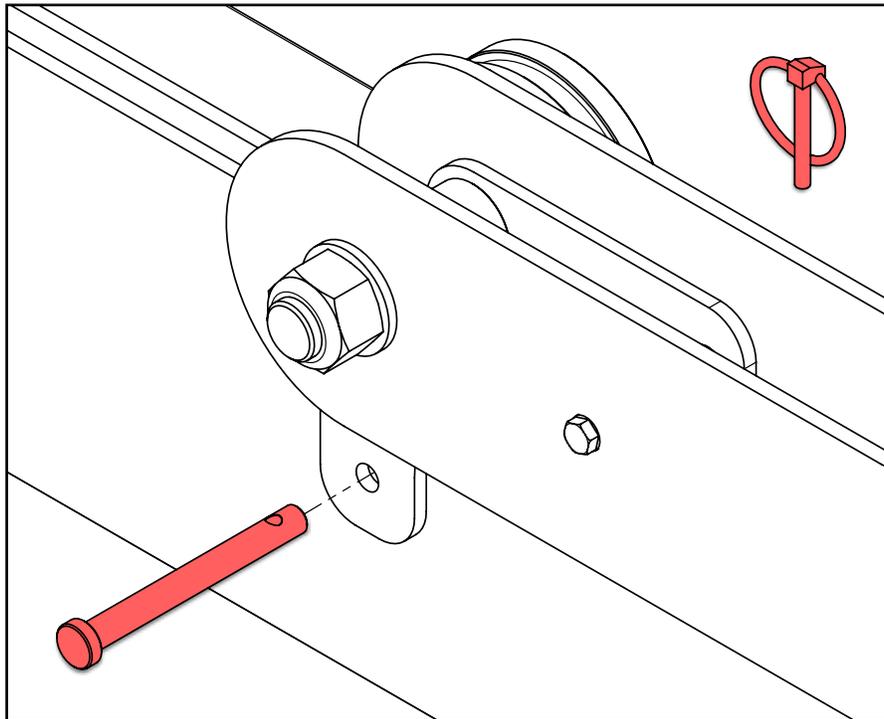
When transporting the trailer, it is imperative that the sawmill head is locked-down securely to the trailer. Start by inserting the four (4) locking pins through the lock-down brackets and secure them with linch pins.



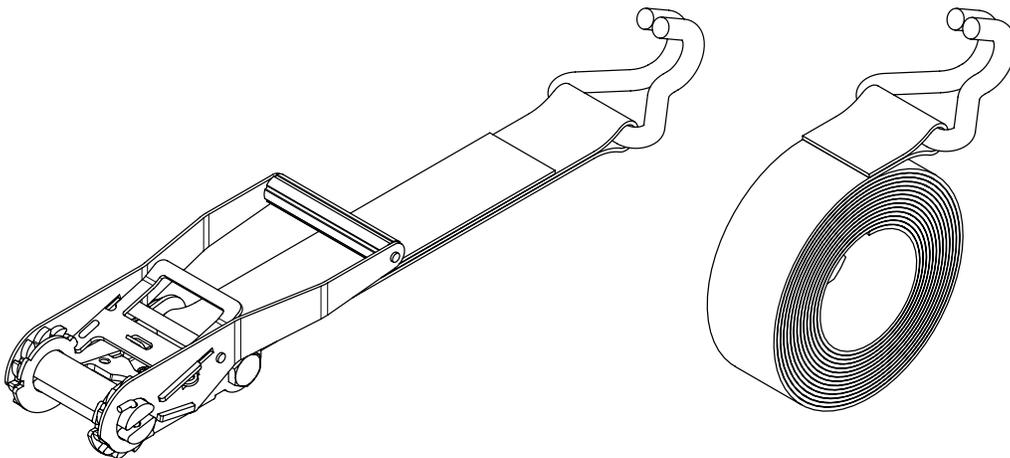Next, route the included ratchet strap (shown below) around the sawmill and trailer to fully lock-down the sawmill head as shown on the next page.




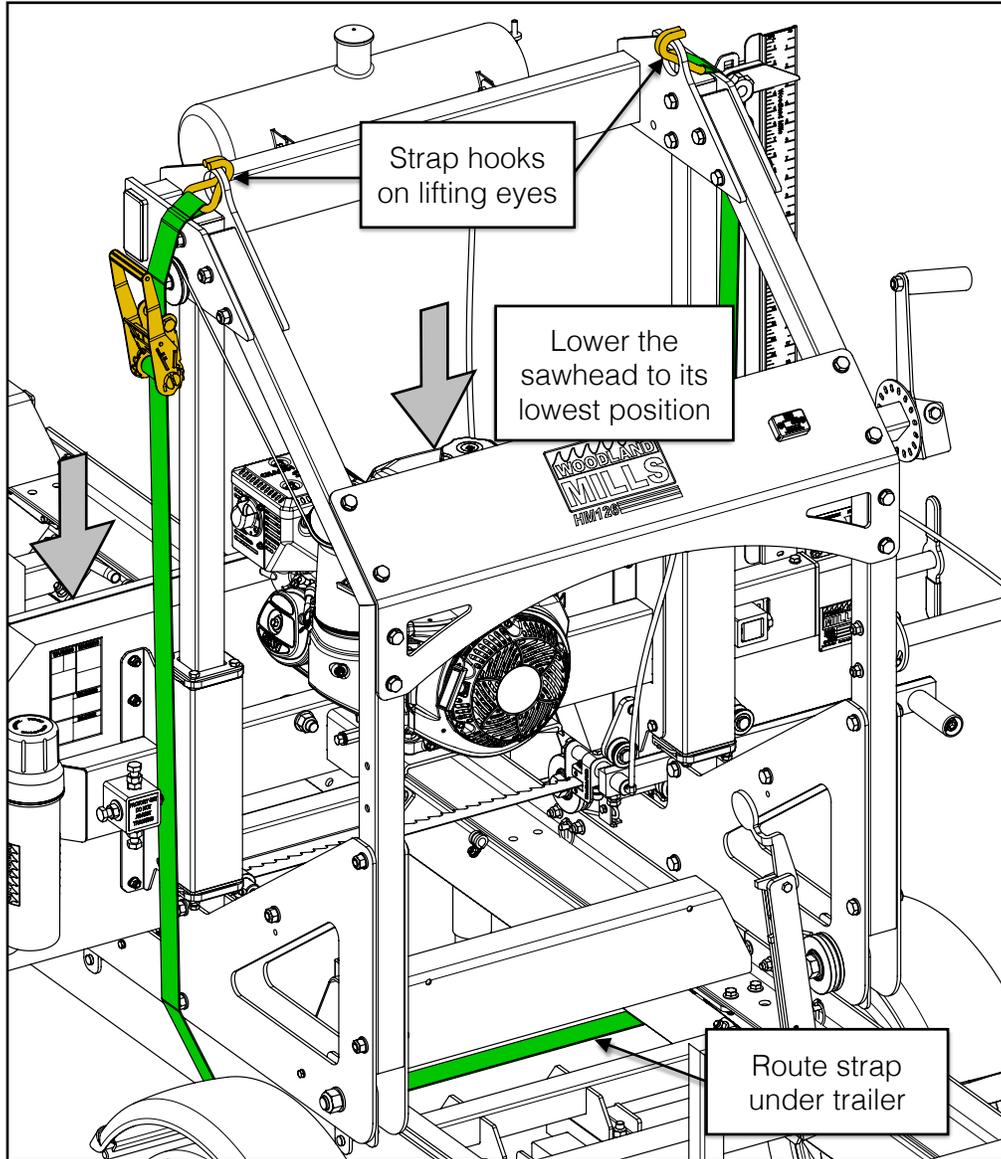Lower the sawhead to its lowest position. Then insert the short strap hook into the cross beam lifting eye on one side of the sawmill, route the long strap down and under the bottom of the trailer, then up to the opposite lifting eye. Ratchet the strap tight until there is no slack.



REPLACEMENT PARTS ORDERING

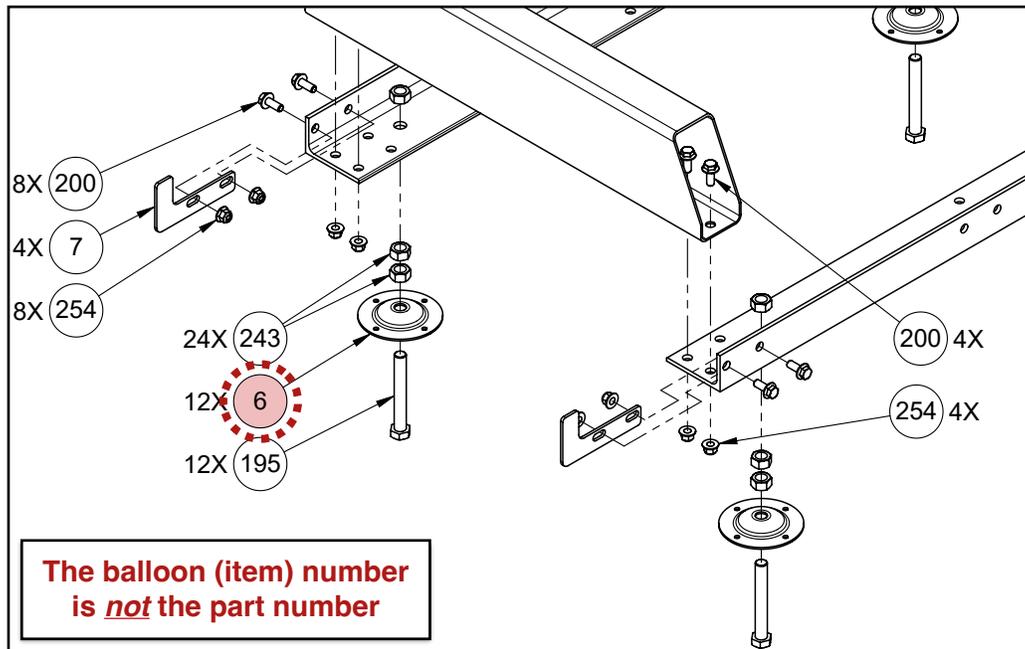When ordering replacement parts, first locate the balloon number(s) from the appropriate ***exploded assembly view*** as shown in the example below:



Next, turn to the ***Parts Lists*** section and locate the balloon number in the “**Item**” column:


PARTS LIST				
Item	Quantity		Part No.	Description
	14 hp	9.5 hp		
1	4	4	0001073	TRACK RAIL, 58.5 mm TALL
2	2	2	0001075	LOG BUNK, END
3	2	2	0001080	LOG BUNK, MID
4	1	1	0001084	LOG BUNK, CENTER
5	2	2	0001072	REINFORCEMENT PLATE, 90 X 200 mm
6	12	12	0001071	LEVELLING FOOT BASE
7	4	4	0001055	CARRIAGE STOP
8	1	1	0001062	LOG CLAMP SHAFT AND BRACKET WELDMENT

Record the part number (e.g. 0001071, HHB-MBM080FCJ, etc.) in the “**Part No.**” column.


Contact Woodland Mills through the website or via phone/email. If possible, include the invoice or sales number from the purchased product so an associated account can be located. If the account has multiple addresses on file, please indicate to which address the replacement part(s) will be shipped.

TONGUE

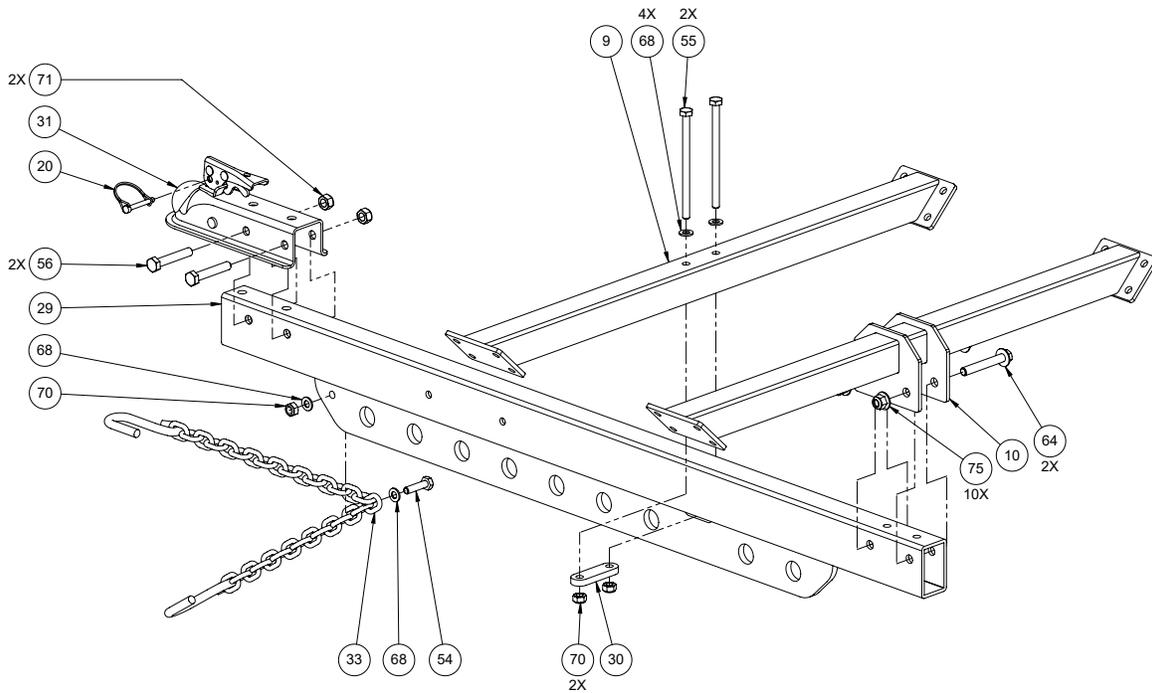
NORTH AMERICA



EUROPE



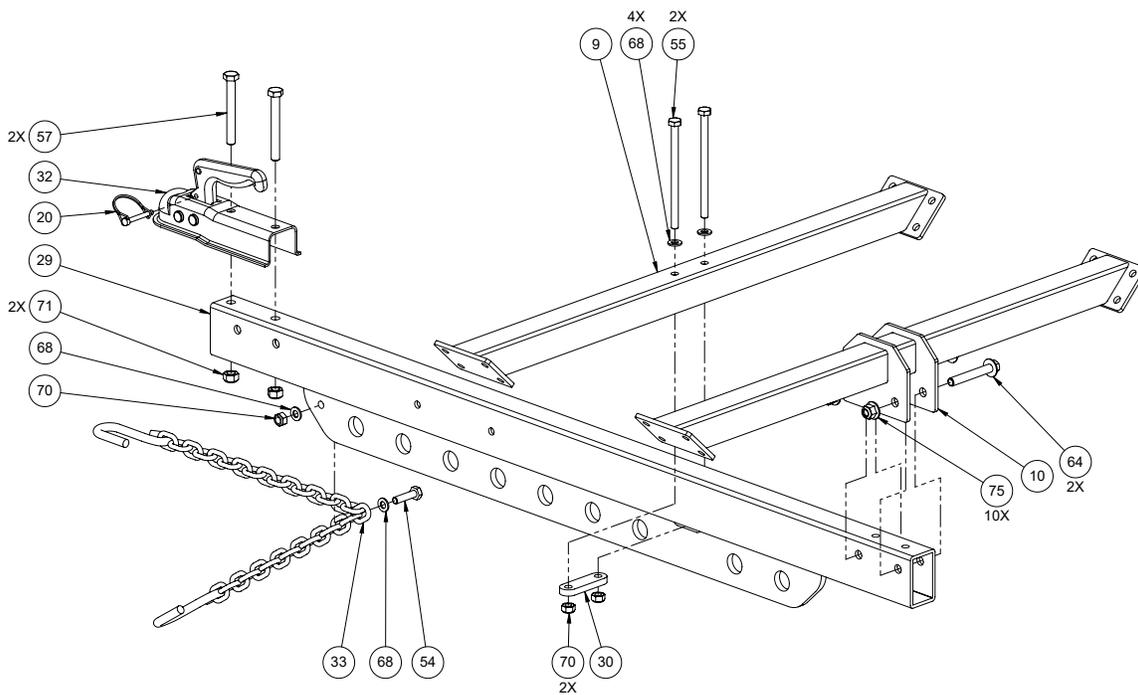


AXLES, WHEELS, AND FENDERS

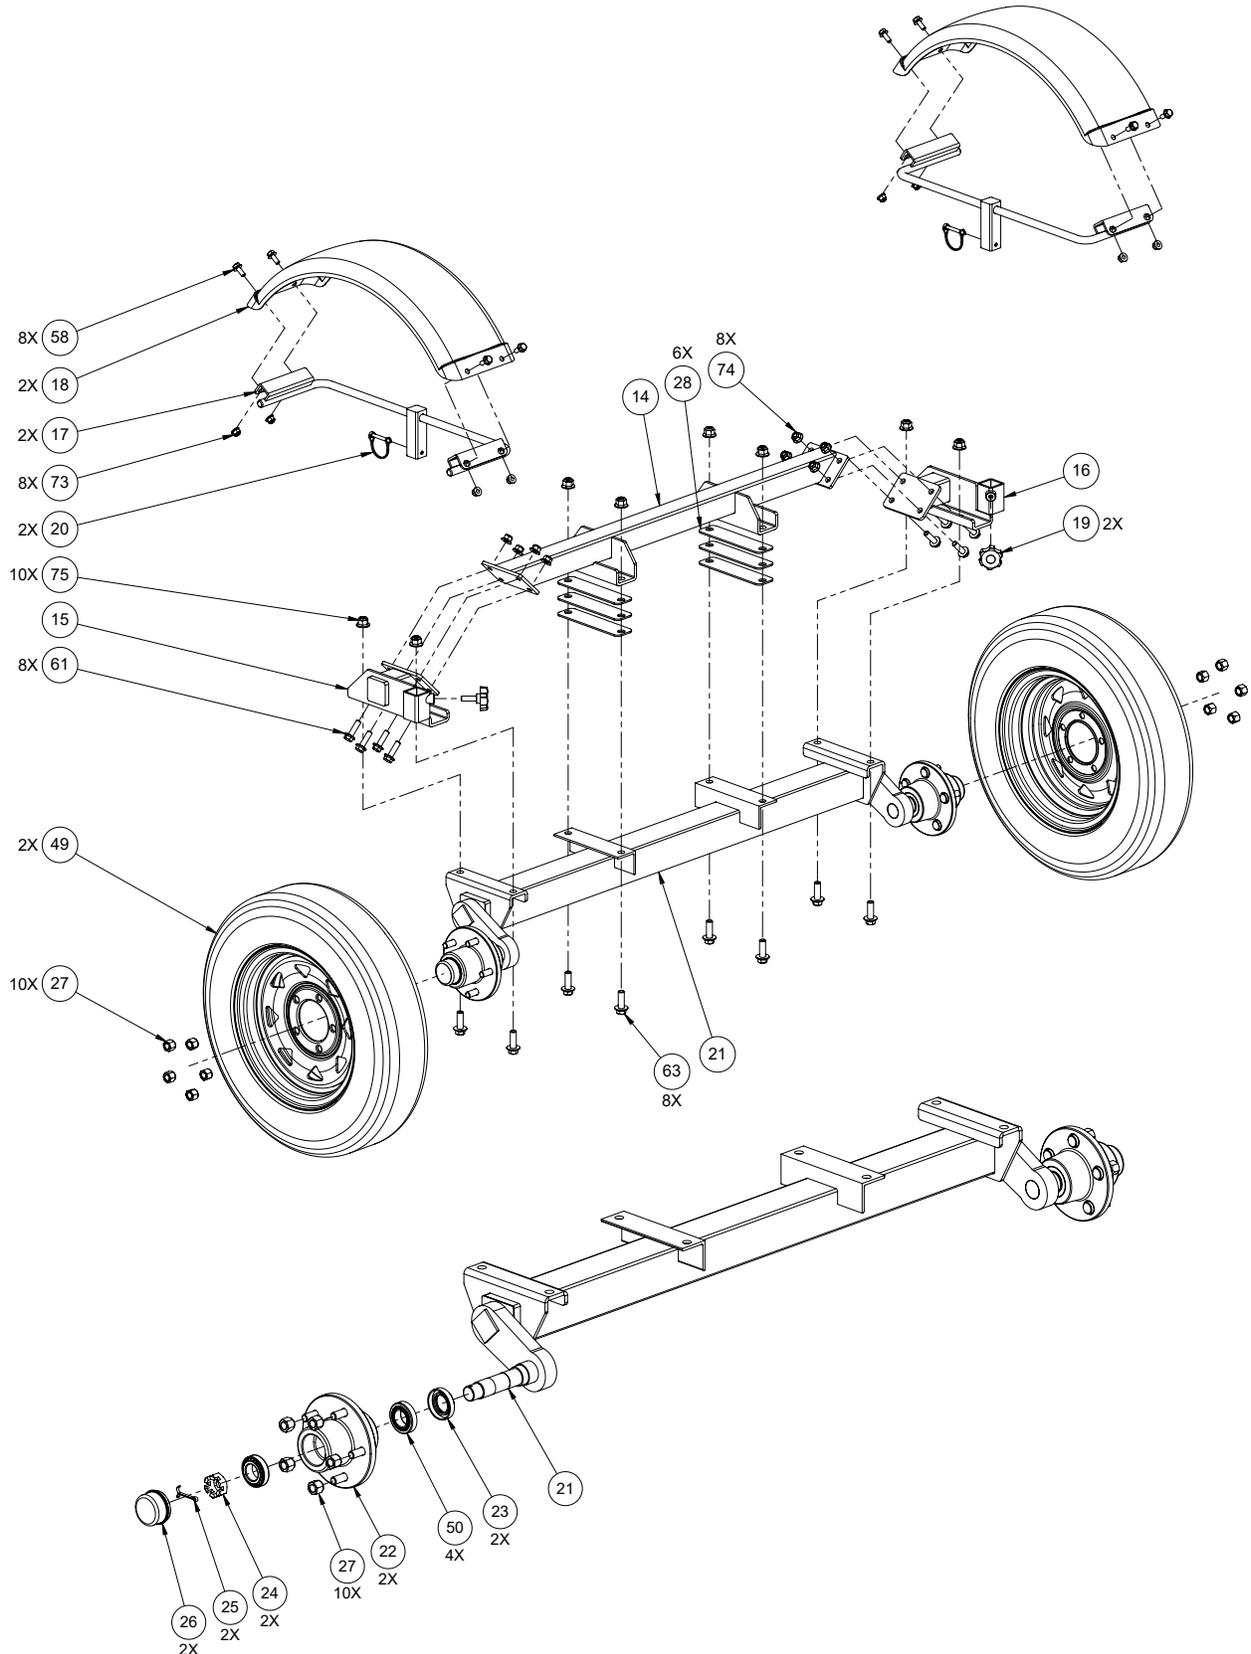


LIGHTING

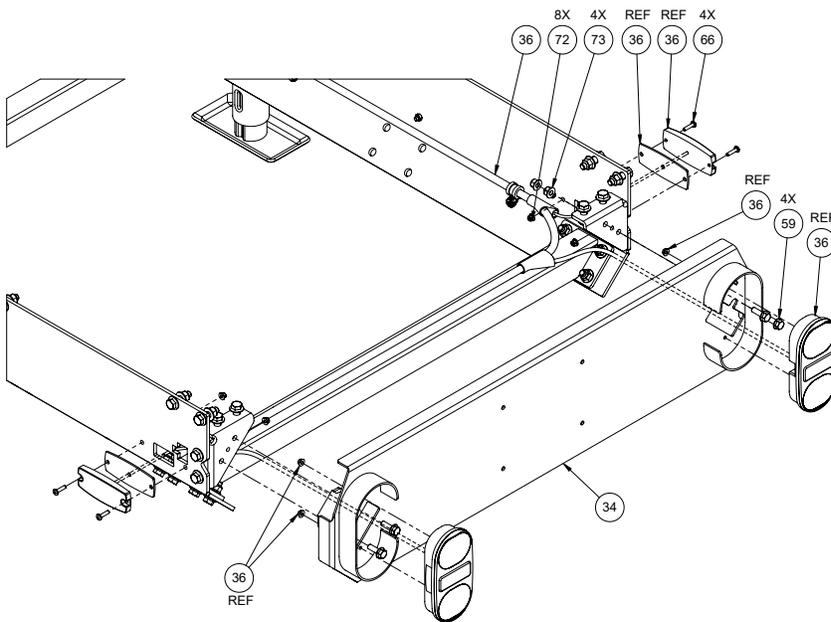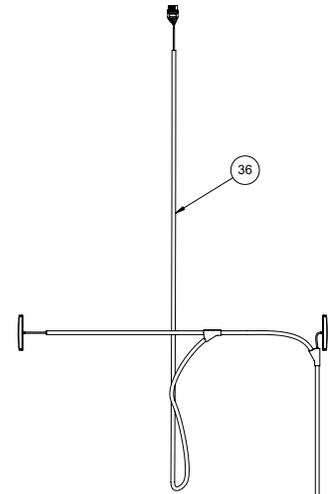
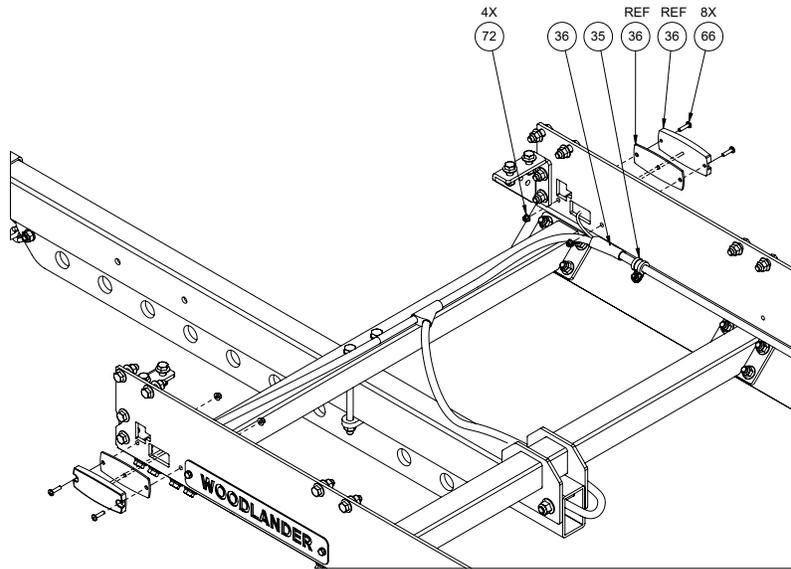
NORTH AMERICA




EUROPE

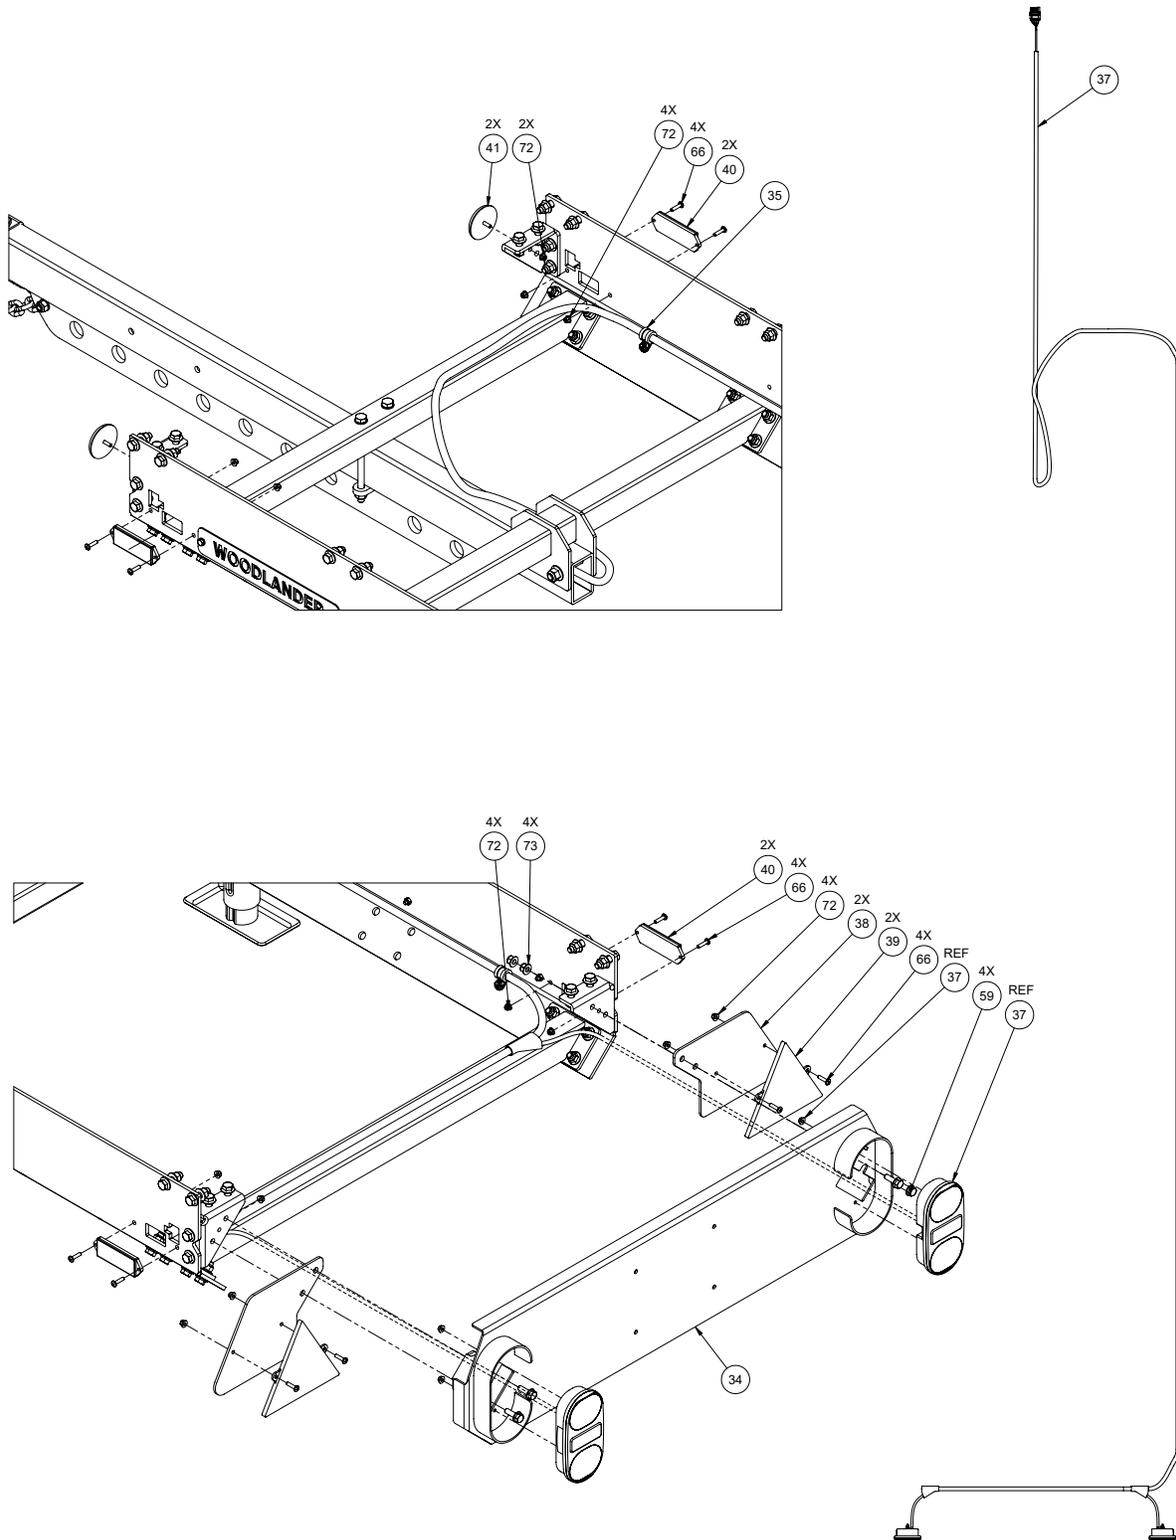


NAMEPLATES

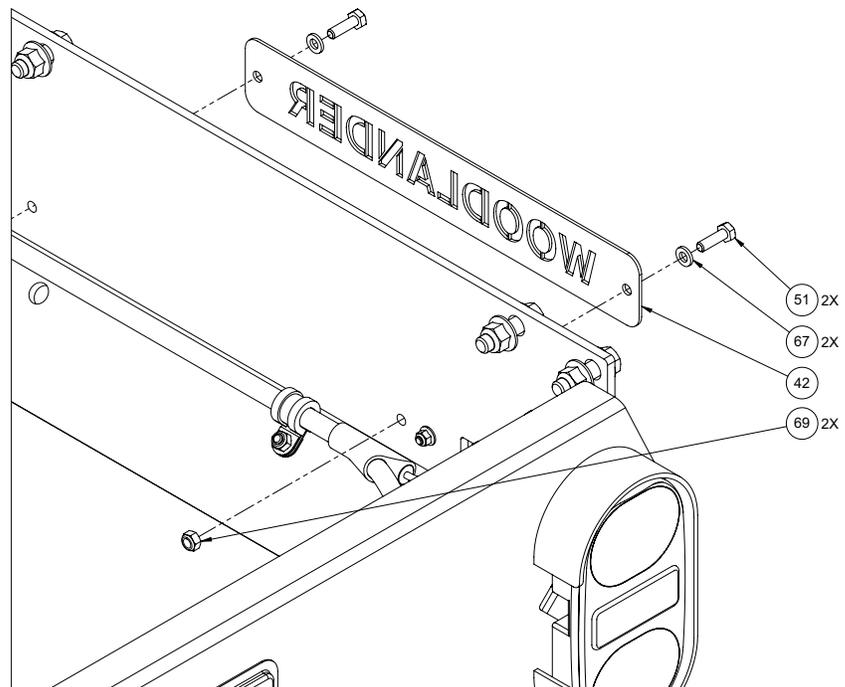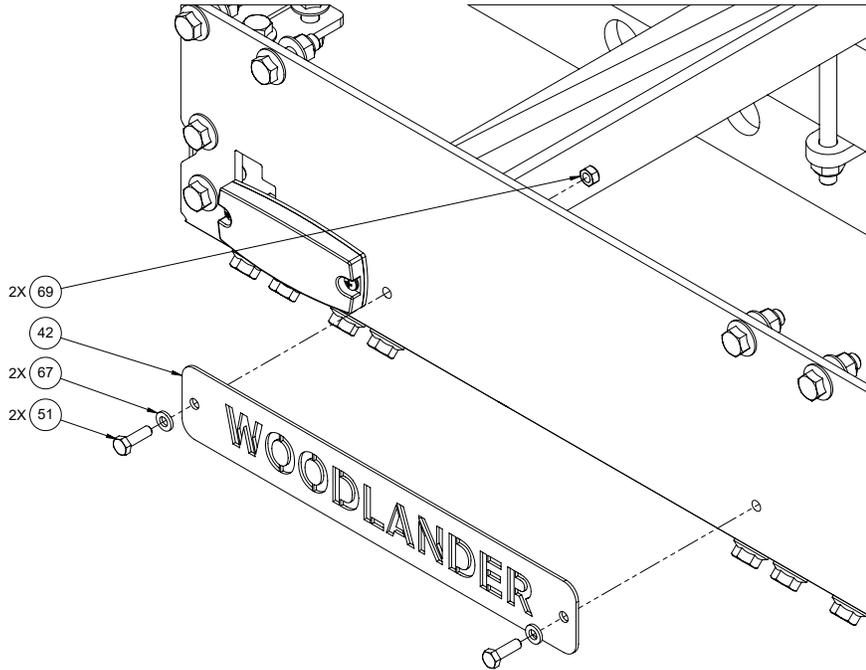

SWIVEL JACKS

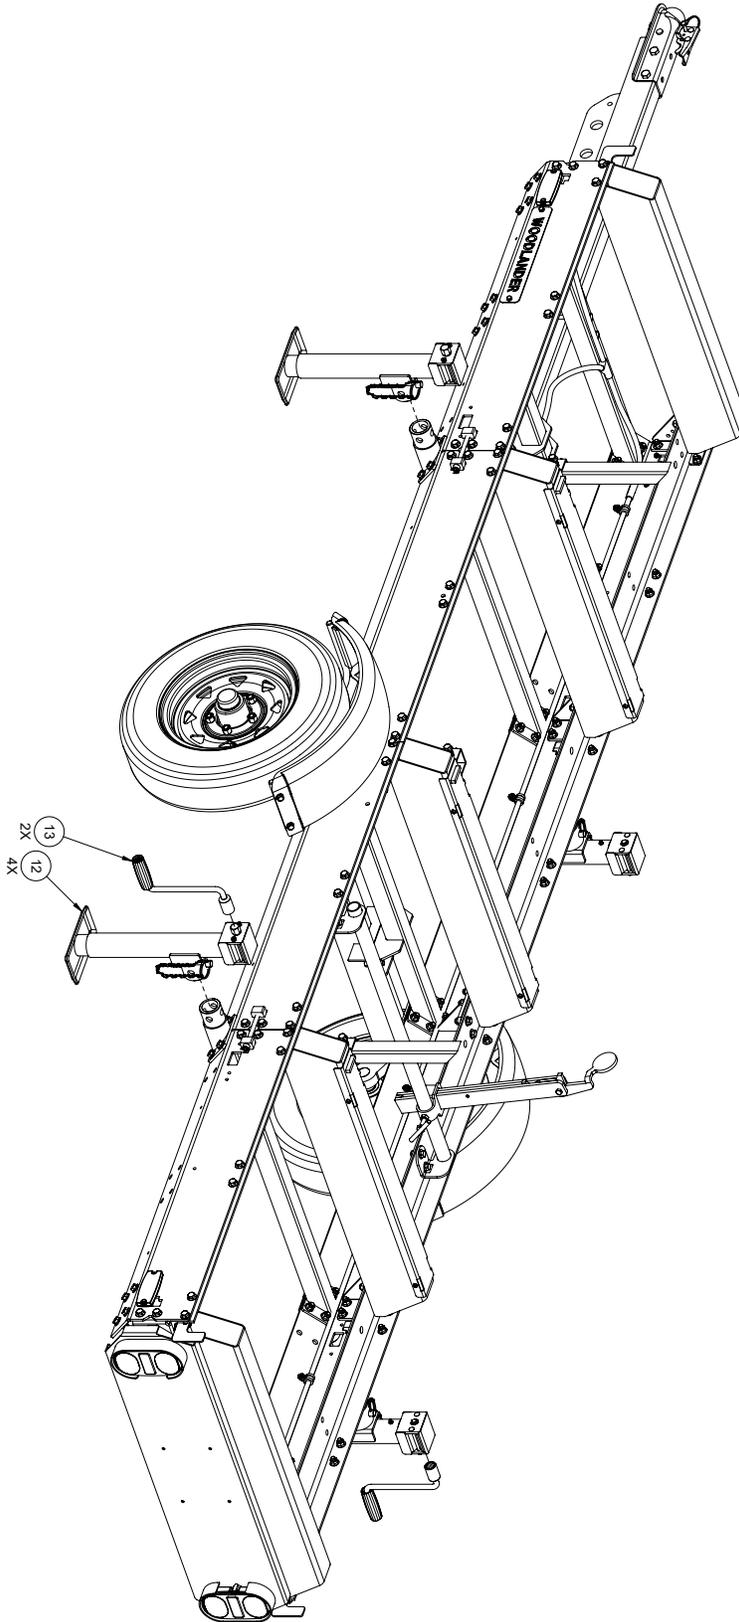

HEAD LOCK-DOWN

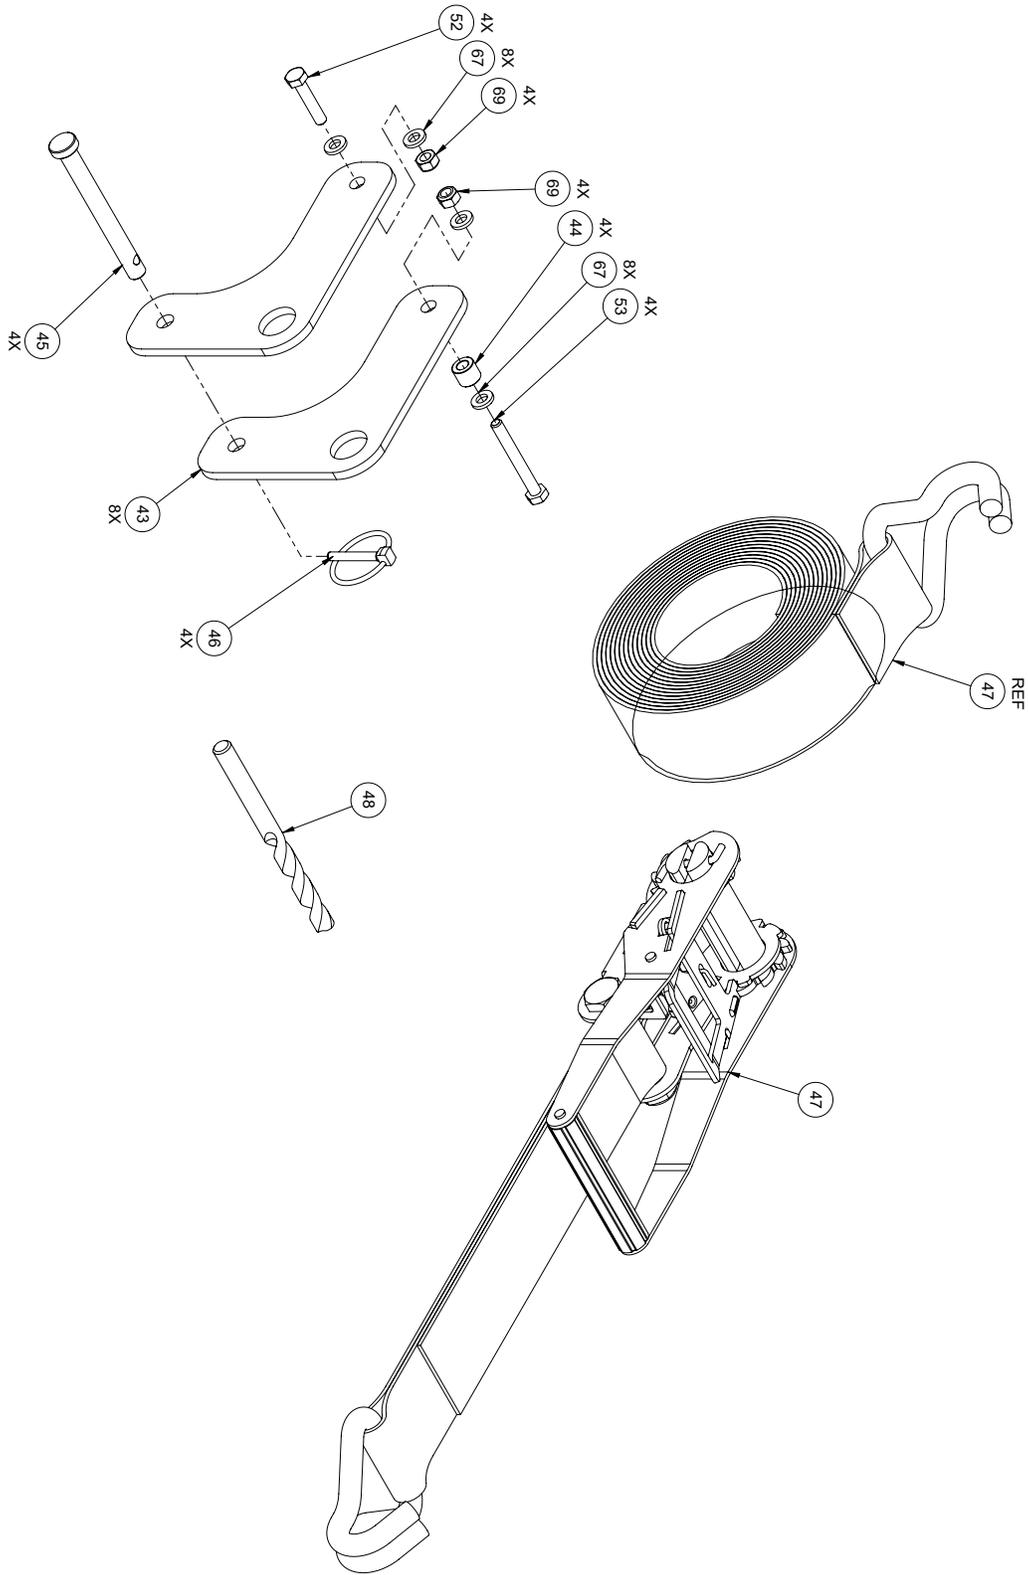



PARTS LISTS

NORTH AMERICA

Item	Quantity		Part No.	Description
	HM126 HM130	HM130 MAX		
1	4	4	0001373	GUSSET, END
2	6	6	0001374	GUSSET, JOINING
3	2	2	0008948	SIDE PLATE, LONG
4	4	4	0008947	SIDE PLATE, SHORT
5	4	4	0008949	SIDE PLATE ALIGNMENT DIAMOND
6	4	4	0008950	SIDE PLATE ALIGNMENT NUT
7	4	4	0008951	SIDE PLATE ALIGNMENT JAW
8	-	3	0002900	CROSS BEAM, HM130MAX
	3	-	0001369	CROSS BEAM, HM126/130
9	-	1	0002899	CROSS BEAM, FRONT, HM130MAX
	1	-	0001370	CROSS BEAM, FRONT, HM126/130
10	-	1	0010163	CROSS BEAM, TONGUE, HM130MAX
	1	-	0010162	CROSS BEAM, TONGUE, HM126/130
11	4	4	0001376	JACK MOUNT
12	4	4	0006798	SWIVEL JACK, PIPE MOUNT, SIDEWIND SOCKET RECEIVER
13	2	2	0006800	CRANK HANDLE, SOCKET DRIVE, 3/4 in [19 mm], SWIVEL JACK
14	-	1	0002898	CROSS BEAM, AXLE, HM130MAX
	1	-	0001679	CROSS BEAM, AXLE, HM126/130
15	1	1	0001680	AXLE MOUNT W/ FENDER ADAPTER, LEFT
16	1	1	0001681	AXLE MOUNT W/ FENDER ADAPTER, RIGHT
17	2	2	0001683	BRACKET, METAL FENDER, 750/850/1000 kg AXLE
18	2	2	0001684	METAL FENDER, 5.30-12 WHEEL
19	2	2	0001698	KNOB, MULTI-LOBE, 48 mm OD, M10 X 1.5, 30 mm LG
20	3	3	0004728	LOCKING PIN, ROUND, 1/4 in DIA, 1-3/8 in USABLE LG, 2 in LG
21	-	1	0010181	AXLE, COMBINED, 1250 kg
	1	-	0010179	AXLE, COMBINED, 1000 kg
22	2	2	0001549	WHEEL HUB, 5-BOLT, 4-1/2 in [114.3 mm] BC, M12 X 1.5 LUGS
23	2	2	0004762	ROTARY SHAFT SEAL, SPRING-LOADED, WIPER LIP, 30 mm SHAFT, 50 mm OD
24	2	2	0006092	LOCK NUT, SLOTTED, M24 X 1.5, 16 mm THK
25	2	2	0004753	COTTER PIN, 5/32 in DIA, 1-1/2 in LG
26	2	2	0001439	WHEEL HUB DUST COVER, 5-BOLT, M12 LUGS
27	10	10	0006202	LUG NUT, M12 X 1.5
28	6	6	0001682	AXLE SHIM PLATE, 3 mm THK
29	1	1	0001371	TONGUE
30	1	1	0001372	TONGUE BRACKET
31	1	1	0001381	HITCH BALL COUPLER, 2 in [50.8 mm] BALL, NORTH AMERICA
33	1	1	0001382	SAFETY CHAIN
34	-	1	0002901	TAILLIGHT BRACKET, HM130MAX
	1	-	0001375	TAILLIGHT BRACKET, HM126/130
35	8	8	0001396	CABLE CLAMP, 1/2 in ID, 1-3/4 in LG
36	1	1	0001676-1	LIGHTING WIRING HARNESS, WOODLANDER, NA
42	2	2	0004445	WOODLANDER NAMEPLATE, 2-HOLE



Item	Quantity		Part No.	Description
	HM126 HM130	HM130 MAX		
43	8	8	0001990	HEAD LOCK-DOWN PLATE
44	4	4	0004142	SPACER, 6.5 ID X 12 OD X 10 mm LG, BLACK
45	4	4	0001394	LOCK-DOWN PIN, 9.5 mm DIA, 77 mm USEABLE LG
46	4	4	0004720	LINCH PIN, 4.5 mm DIA, 25 mm USEABLE LG, 32 mm LG
47	1	1	0005146	RATCHET STRAP, 50 mm WD, 4500 mm LG
48	1	1	0004742	DRILL BIT, 10 mm, JOBBERS LG
49	2	2	5.30-12	WHEEL, 5.30-12
50	4	4	L44649	ROLLER BEARING, TAPERED, 1-1/16 in SFT, 1-3/64 in HSG, .56 in WD
51	12	12	HHB-MBE075FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 20 mm LG, FULL
52	4	4	HHB-MBE085FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 30 mm LG, FULL
53	4	4	HHB-MBE105FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 50 mm LG, FULL
54	1	1	HHB-MBM095FCM	HEX HEAD BOLT, CLS 10.9, M10 X 1.5, 40 mm LG, FULL
55	2	2	HHB-MBM215PCM	HEX HEAD BOLT, CLS 10.9, M10 X 1.5, 160 mm LG, 26 mm LG THD
56	2	2	HHB-MBR125PCM	HEX HEAD BOLT, CLS 10.9, M12 X 1.75, 70 mm LG, 30 mm LG THD
58	8	8	FHH-MBJ075PCJ	HEX BOLT, FLANGED, CLS 8.8, M8 X 1.25, 20 mm LG, 16 mm LG THD
59	4	4	FHH-MBJ080FCJ	HEX BOLT, FLANGED, CLS 8.8, M8 X 1.25, 25 mm LG, FULL
60	116	116	FHH-MBM085FCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 30 mm LG, FULL
61	32	32	FHH-MBM090PCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 35 mm LG, 26 mm LG THD
62	8	8	FHH-MBM095PCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 40 mm LG, 26 mm LG THD
63	8	8	FHH-MBR090PCM	HEX BOLT, FLANGED, CLS 10.9, M12 X 1.75, 35 mm LG, 30 mm LG THD
64	2	2	FHH-MBR135PCM	HEX BOLT, FLANGED, CLS 10.9, M12 X 1.75, 80 mm LG, 30 mm LG THD
65	4	4	SHC-MBM175PTA	SHCS, SST, M10 X 1.5, 120 mm LG, 32 mm LG THD
66	8	8	PPH-MBA075FCE	SCREW, PPH, CLS 4.8, M5 X 0.8, 20 mm LG, FULL
67	28	28	FTW-MBE000AJ	FLAT WASHER, M6
68	4	4	FTW-MBM000AJ	FLAT WASHER, M10
69	20	20	HLN-MBECH	LOCK NUT, CLS 8, M6 X 1
70	3	3	HLN-MBMCL	LOCK NUT, CLS 10, M10 X 1.5
71	2	2	HLN-MBRCL	LOCK NUT, CLS 10, M12 X 1.75
72	8	8	FLN-MBACH	LOCK NUT, FLANGED, CLS 8, M5 X 0.8
73	12	12	FLN-MBJCH	LOCK NUT, FLANGED, CLS 8, M8 X 1.25
74	156	156	FLN-MBMCL	LOCK NUT, FLANGED, CLS 10, M10 X 1.5
75	10	10	FLN-MBRCL	LOCK NUT, FLANGED, CLS 10, M12 X 1.75



EUROPE

Item	Quantity		Part No.	Description
	HM126 HM130	HM130 MAX		
1	4	4	0001373	GUSSET, END
2	6	6	0001374	GUSSET, JOINING
3	2	2	0008948	SIDE PLATE, LONG
4	4	4	0008947	SIDE PLATE, SHORT
5	4	4	0008949	SIDE PLATE ALIGNMENT DIAMOND
6	4	4	0008950	SIDE PLATE ALIGNMENT NUT
7	4	4	0008951	SIDE PLATE ALIGNMENT JAW
8	-	3	0002900	CROSS BEAM, HM130MAX
	3	-	0001369	CROSS BEAM, HM126/130
9	-	1	0002899	CROSS BEAM, FRONT, HM130MAX
	1	-	0001370	CROSS BEAM, FRONT, HM126/130
10	-	1	0010163	CROSS BEAM, TONGUE, HM130MAX
	1	-	0010162	CROSS BEAM, TONGUE, HM126/130
11	4	4	0001376	JACK MOUNT
12	4	4	0006798	SWIVEL JACK, PIPE MOUNT, SIDEWIND SOCKET RECEIVER
13	2	2	0006800	CRANK HANDLE, SOCKET DRIVE, 3/4 in [19 mm], SWIVEL JACK
14	-	1	0002898	CROSS BEAM, AXLE, HM130MAX
	1	-	0001679	CROSS BEAM, AXLE, HM126/130
15	1	1	0001680	AXLE MOUNT W/ FENDER ADAPTER, LEFT
16	1	1	0001681	AXLE MOUNT W/ FENDER ADAPTER, RIGHT
17	2	2	0001683	BRACKET, METAL FENDER, 750/850/1000 kg AXLE
18	2	2	0001684	METAL FENDER, 5.30-12 WHEEL
19	2	2	0001698	KNOB, MULTI-LOBE, 48 mm OD, M10 X 1.5, 30 mm LG
20	3	3	0004728	LOCKING PIN, ROUND, 1/4 in DIA, 1-3/8 in USABLE LG, 2 in LG
21	-	1	0010181	AXLE, COMBINED, 1250 kg
	1	-	0010179	AXLE, COMBINED, 1000 kg
22	2	2	0001549	WHEEL HUB, 5-BOLT, 4-1/2 in [114.3 mm] BC, M12 X 1.5 LUGS
23	2	2	0004762	ROTARY SHAFT SEAL, SPRING-LOADED, WIPER LIP, 30 mm SHAFT, 50 mm OD
24	2	2	0006092	LOCK NUT, SLOTTED, M24 X 1.5, 16 mm THK
25	2	2	0004753	COTTER PIN, 5/32 in DIA, 1-1/2 in LG
26	2	2	0001439	WHEEL HUB DUST COVER, 5-BOLT, M12 LUGS
27	10	10	0006202	LUG NUT, M12 X 1.5
28	6	6	0001682	AXLE SHIM PLATE, 3 mm THK
29	1	1	0001371	TONGUE
30	1	1	0001372	TONGUE BRACKET
32	1	1	0001702	HITCH BALL COUPLER, 50 mm [2 in] BALL, EUROPE
33	1	1	0001382	SAFETY CHAIN
34	-	1	0002901	TAILLIGHT BRACKET, HM130MAX
	1	-	0001375	TAILLIGHT BRACKET, HM126/130
35	8	8	0001396	CABLE CLAMP, 1/2 in ID, 1-3/4 in LG
37	1	1	0001676-2	LIGHTING WIRING HARNESS, WOODLANDER, EU
38	2	2	0001379	TRIANGLE REFLECTOR BRACKET, EU
39	2	2	0001390	REAR REFLECTOR, RED, EU
40	4	4	0001391	SIDE REFLECTOR, AMBER, EU



Item	Quantity		Part No.	Description
	HM126 HM130	HM130 MAX		
41	2	2	0001392	FRONT REFLECTOR, WHITE, EU
42	2	2	0004445	WOODLANDER NAMEPLATE, 2-HOLE
43	8	8	0001990	HEAD LOCK-DOWN PLATE
44	4	4	0004142	SPACER, 6.5 ID X 12 OD X 10 mm LG, BLACK
45	4	4	0001394	LOCK-DOWN PIN, 9.5 mm DIA, 77 mm USEABLE LG
46	4	4	0004720	LINCH PIN, 4.5 mm DIA, 25 mm USEABLE LG, 32 mm LG
47	1	1	0005146	RATCHET STRAP, 50 mm WD, 4500 mm LG
48	1	1	0004742	DRILL BIT, 10 mm, JOBBERS LG
49	2	2	5.30-12	WHEEL, 5.30-12
50	4	4	L44649	ROLLER BEARING, TAPERED, 1-1/16 in SFT, 1-3/64 in HSG, .56 in WD
51	12	12	HHB-MBE075FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 20 mm LG, FULL
52	4	4	HHB-MBE085FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 30 mm LG, FULL
53	4	4	HHB-MBE105FCJ	HEX HEAD BOLT, CLS 8.8, M6 X 1, 50 mm LG, FULL
54	1	1	HHB-MBM095FCM	HEX HEAD BOLT, CLS 10.9, M10 X 1.5, 40 mm LG, FULL
55	2	2	HHB-MBM215PCM	HEX HEAD BOLT, CLS 10.9, M10 X 1.5, 160 mm LG, 26 mm LG THD
57	2	2	HHB-MBR155PCM	HEX HEAD BOLT, CLS 10.9, M12 X 1.75, 100 mm LG, 30 mm LG THD
58	8	8	FHH-MBJ075PCJ	HEX BOLT, FLANGED, CLS 8.8, M8 X 1.25, 20 mm LG, 16 mm LG THD
59	4	4	FHH-MBJ080FCJ	HEX BOLT, FLANGED, CLS 8.8, M8 X 1.25, 25 mm LG, FULL
60	116	116	FHH-MBM085FCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 30 mm LG, FULL
61	32	32	FHH-MBM090PCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 35 mm LG, 26 mm LG THD
62	8	8	FHH-MBM095PCM	HEX BOLT, FLANGED, CLS 10.9, M10 X 1.5, 40 mm LG, 26 mm LG THD
63	8	8	FHH-MBR090PCM	HEX BOLT, FLANGED, CLS 10.9, M12 X 1.75, 35 mm LG, 30 mm LG THD
64	2	2	FHH-MBR135PCM	HEX BOLT, FLANGED, CLS 10.9, M12 X 1.75, 80 mm LG, 30 mm LG THD
65	4	4	SHC-MBM175PTA	SHCS, SST, M10 X 1.5, 120 mm LG, 32 mm LG THD
66	12	12	PPH-MBA075FCE	SCREW, PPH, CLS 4.8, M5 X 0.8, 20 mm LG, FULL
67	28	28	FTW-MBE000AJ	FLAT WASHER, M6
68	4	4	FTW-MBM000AJ	FLAT WASHER, M10
69	20	20	HLN-MBECH	LOCK NUT, CLS 8, M6 X 1
70	3	3	HLN-MBMCL	LOCK NUT, CLS 10, M10 X 1.5
71	2	2	HLN-MBRCL	LOCK NUT, CLS 10, M12 X 1.75
72	14	14	FLN-MBACH	LOCK NUT, FLANGED, CLS 8, M5 X 0.8
73	12	12	FLN-MBJCH	LOCK NUT, FLANGED, CLS 8, M8 X 1.25
74	156	156	FLN-MBMCL	LOCK NUT, FLANGED, CLS 10, M10 X 1.5
75	10	10	FLN-MBRCL	LOCK NUT, FLANGED, CLS 10, M12 X 1.75

This page intentionally left blank.



WOODLAND
MILLS